Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

## USER ACCEPTANCE TESTING - SAO STAFF (DATA GATHERER) MODULE

```
Revised 2026-11-01 for app build of 2026-10-28 (commit 926b836)
  - All 9 cases updated to the current labels and behaviour; old run moved
    to Comments. 12 new cases added (TC-S10 to TC-S21). Total 21.
  - Validation tab rebuilt: "Failed Scans" and "Import Errors" sections with
    filter chips and "Select Multiple". The old "Edit Record" / "Approve &
    Sync" editor is gone; the drawer no longer has "Import Errors".
  - New: forced profile-completion dialog ("Log out" instead of "Later"),
    "SAST Guidelines" screen, Google Sheet import job with final counts,
    instructor/subject pickers on corrections (422 "Not saved"), stamp
    number card (409 duplicate), scan auto-discards (duplicate stamp, fewer
    than 5 answers), not-a-SAST-form rejection, OMR vs Gemini cross-check.
  - Sync Queue now keeps uploaded scans (status SUCCESS) across restarts
    until the active term changes; removing a scan deletes its image.
  - Every case now has Revision and Account Needed lines; cases that alter
    shared data are marked [DESTRUCTIVE].
================================================================================
CEBU TECHNOLOGICAL UNIVERSITY - ARGAO CAMPUS
COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department
USER ACCEPTANCE TESTING - SAO STAFF (DATA GATHERER) MODULE
================================================================================
Capstone Project Title : iEvaluate: An AI-Driven Mobile Instructor Evaluation
                         and Performance Analysis System Using N8n Workflow
                         Automation
Team                   : ERMM
Project Leader         : Rodz Harvey Licayan
Front-End Programmer   : Michael Thomas Gonzaga
QA Engineer            : Mark Lawrence Medillo
Technical Writer       : Evangeline Caruana
Role under test        : SAO_STAFF  ("SAO Staff (Data Gatherer)")
Device                 : Infinix X6525, Android 13
Active term            : 2nd Semester, 2027-2028
App build              : 2026-10-28, branch main, commit 926b836
Test account           : the SAO staff account held by the tester.
                         Credentials are deliberately NOT recorded here.
WHAT THIS ROLE DOES
  The SAO Staff member is the person who physically scans completed paper SAST
  evaluation forms into the system. Their work is a pipeline:
      scan a form  ->  it queues locally  ->  it uploads to n8n  ->
      anything n8n cannot read is flagged  ->  staff corrects it  ->  it syncs
  This document tests that pipeline, because that is where the role's real work
  and its real risk of data loss sit. Everything else is secondary.
--------------------------------------------------------------------------------
HOW TO READ THIS DOCUMENT
--------------------------------------------------------------------------------
* Text in "double quotes" appears on screen exactly as written.
* Names in [square brackets] are database tables, edge functions or n8n
  webhooks to check when a step needs back-end verification.
* Each step has its own expected result.
* "Actual Result" is blank where the case has not been run on this build.
* "Revision" says how the case changed for the 2026-10-28 build.
* "Account Needed" names the role of the account the tester signs in with.
* [DESTRUCTIVE] marks a case that changes or removes shared data (discards,
  deletes, term change). Run it only on records made for testing, and agree
  it with the team first.
* All n8n calls now go through the Supabase [n8n-proxy] edge function.
!! DATA-LOSS WARNING !!
```

A scanned form represents a real student's evaluation that exists on paper only once. Cases marked [LIVE DATA] upload or discard real records. The single most important property in this whole module is that A SCAN IS NEVER SILENTLY LOST. Several cases below exist only to prove that.

---

SCREEN COVERAGE

---

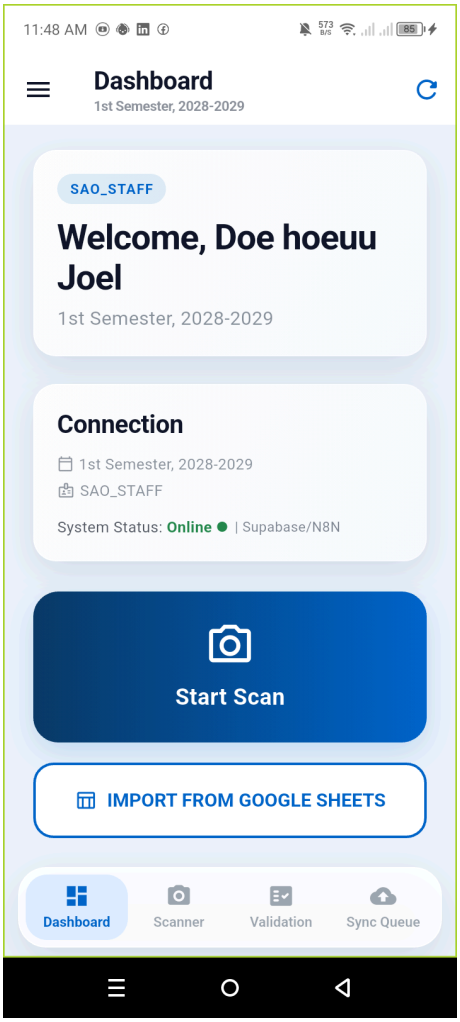
| SCREEN | REACHED BY | CASE |
|---|---|---|
| Login / Registration | App start, "Register" | TC-S01, TC-S21 |
| Complete your information | Pops up after sign-in when ID or address is missing | TC-S10 |
| SAST Guidelines | Auto once per term; Settings "Help" | TC-S11 |
| Dashboard | Tab "Dashboard" | TC-S01 |
| Scanner | Tab "Scanner" | TC-S02, TC-S03, TC-S15, TC-S16, TC-S17 |
| Sync Queue | Tab "Sync Queue" | TC-S04, TC-S05, TC-S19, TC-S20 |
| Validation | Tab "Validation" (sections "Failed Scans" and "Import Errors") | TC-S06, TC-S07, TC-S20 |
| Fix Import Error | Validation -> "Import Errors" item | TC-S06 |
| Correct Failed Scan | Validation -> "Failed Scans" item | TC-S07, TC-S13, TC-S14, TC-S18 |
| Google Sheets Import | Dashboard "IMPORT FROM GOOGLE SHEETS" / drawer "Google Sheet / Form Import" | TC-S08, TC-S12 |
| Settings | Drawer "Settings" | TC-S09 |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S01 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SIGN IN AS SAO STAFF AND READ THE SHIFT DASHBOARD | |
| **Revision** | updated - dashboard layout, OVERALL SURVEYS label, SUCCESS kept | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | App on the Login screen. Account is active with role SAO_STAFF, with Staff ID and address already filled in (else TC-S10 runs first). | |
| **Test Data** | View only. The SAO admin dashboard's "Files Scanned" figure for the active term, for the cross-check in step 5. | |
| **Steps** | 1. Sign in with the SAO staff credentials.<br>***Expected:*** Routes to the gatherer screen. The app bar reads "Dashboard" with the term below it, and the bottom bar has the tabs "Dashboard", "Scanner", "Validation" and "Sync Queue". On the first sign-in of a term the "SAST Guidelines" screen opens first (see TC-S11). | |
| | 2. Confirm the role boundary, including the drawer.<br>***Expected:*** The drawer holds only "Google Sheet / Form Import", "Settings" and "Log Out". There is NO route to any SAO Admin screen - no Users, no Personnel, no System Settings, no Security Audit Logs. A staff account that can reach an admin screen is a FAIL. | |
| | 3. Read the welcome card and the "Connection" card.<br>***Expected:*** A role chip "SAO_STAFF", "Welcome, <your name>" and the active term set by the SAO admin. "Connection" shows the term, the role and "System Status: Online \| Supabase/N8N" (or "Offline" in red). Tapping the status line checks it again. | |
| | 4. Read the "Shift Activity" section.<br>***Expected:*** Subtitle reads "Live database and local queue totals." with four counters: "ENTRIES TODAY / submitted today", "PENDING / not yet synced", "SUCCESS / synced this session" and "OVERALL SURVEYS / gathered this term". Above them are "Start Scan" and "IMPORT FROM GOOGLE SHEETS". | |
| | 5. Confirm each counter means what its label says.<br>***Expected:*** ENTRIES TODAY is the rows saved today in [sast_all_raw_data_survey] plus this phone's scans not yet uploaded; PENDING counts pending or failed scans in the local queue; SUCCESS counts uploaded scans still listed in the Sync Queue; OVERALL SURVEYS matches the "Files Scanned" figure on the SAO admin dashboard for the same term. | |
| | 6. Scan one form (see TC-S02), then return to the dashboard. Tap the refresh icon in the app bar.<br>***Expected:*** PENDING and ENTRIES TODAY increase by one. After a successful sync, PENDING falls and SUCCESS rises. Refresh shows "Dashboard refreshed". | |
| **Expected Result** | The staff member lands on their own dashboard with no admin access, and the four shift counters track the real state of the local queue and the database. | |
| **Actual Result (Pass/Fail)** | PARTIAL – Staff signed in to Dashboard with 1st Semester, 2028-2029, tabs Dashboard / Scanner / Validation / Sync Queue; drawer held only Google Sheet / Form Import, Settings, Log Out; Shift Activity showed 0 ENTRIES TODAY, 0 PENDING, 12 SUCCESS, 1173 OVERALL SURVEYS. | |

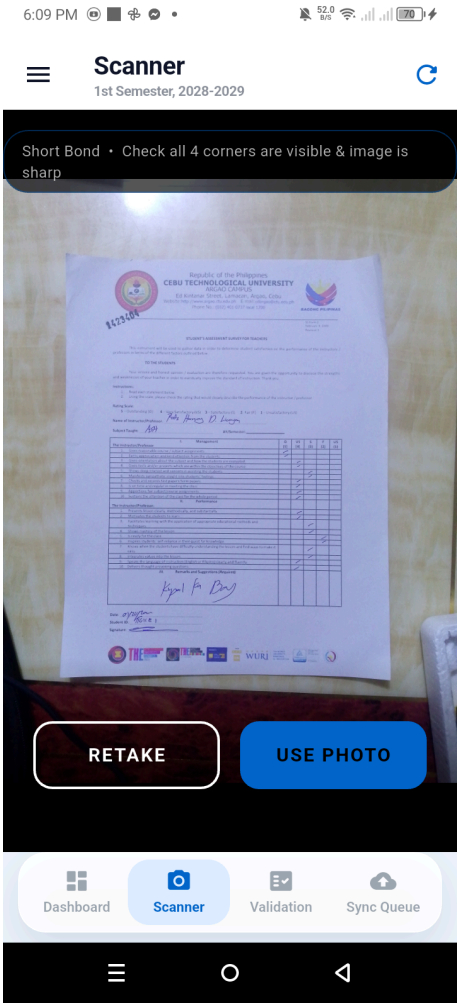
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Steps 1-5 run; OVERALL SURVEYS 1173 matched admin Files Scanned 1173. Step 6 not run (needs a scan). SUCCESS (12) survived an app restart. Old run (31/08/2026, older build): PASS on steps 1, 3 and 4. Dashboard showed the term "2nd Semester, 2027-2028", "Shift Activity" with "Live database and local queue totals.", the counters "0 ENTRIES TODAY / submitted today", "0 PENDING / not yet synced", "0 SUCCESS / synced this session" and "152 ... gathered this term", plus the "IMPORT FROM GOOGLE SHEETS" button and the four tabs. The term count of 152 MATCHED the "152 Files Scanned" on the SAO admin dashboard. Steps 2 and 6 not executed. Note for this build: SUCCESS is labelled "synced this session" but now survives app restarts until the term changes (see TC-S19). Record which meaning you observe. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S02 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SCAN A COMPLETED FORM - HAPPY PATH [LIVE DATA] | |
| **Revision** | updated - new guidance texts, A4 size, preview and snackbars | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | On the "Scanner" tab. Camera permission granted. One completed paper SAST form. Good lighting and a plain background. | |
| **Test Data** | One real completed, stamped form whose stamp number has NOT been scanned this term. Note its stamp number, Student ID and instructor before scanning, so the result can be checked. | |
| **Steps** | 1. Open the "Scanner" tab for the first time.<br>***Expected:*** The app requests camera permission. Granting it starts the preview; refusing it shows "Camera unavailable. Check that camera permission is granted ..." with a "Try again" button, not a black screen. | |
| | 2. Read the on-screen guidance.<br>***Expected:*** A status pill reads "FIT SHORT BOND PAPER INSIDE THE FRAME" (the size matches the selected paper) over the guide frame. | |
| | 3. Open the paper-size menu in the top bar and pick the size of the form.<br>***Expected:*** "Short Bond" (8.5 x 11"), "A4" (210 x 297 mm) and "Long Bond" (8.5 x 13") are listed; the chosen one is ticked, and the frame and the pill update to it. | |
| | 4. Hold the device in landscape.<br>***Expected:*** The scanner stays upright. If the device ignores the portrait lock, it shows "PLEASE HOLD PORTRAIT" and "The scanner works best in upright mode" and no capture button. | |
| | 5. Align the form in the frame and hold still.<br>***Expected:*** The pill keeps the "FIT ... PAPER INSIDE THE FRAME" guidance. | |
| | 6. Tap the capture button.<br>***Expected:*** The pill shows "FOCUSING..." then "HOLD STEADY..." while the photo is taken; the preview then opens and shows "ANALYZING SHARPNESS..." followed by "Short Bond • Check all 4 corners are visible & image is sharp" (with the chosen size). | |
| | 7. Accept the capture with "USE PHOTO".<br>***Expected:*** Snackbar "Captured! Syncing in background..." and the camera returns. The scan is in the Sync Queue and the dashboard "PENDING" counter rose by one until the upload finishes. | |
| | 8. Confirm the scan is queued BEFORE any upload.<br>***Expected:*** With mobile data and Wi-Fi off, a capture still lands in the Sync Queue. It is not lost if the app is closed before syncing. | |
| **Expected Result** | A well-presented form can be captured with clear guidance throughout, and the accepted scan is stored locally before any upload is attempted. | |

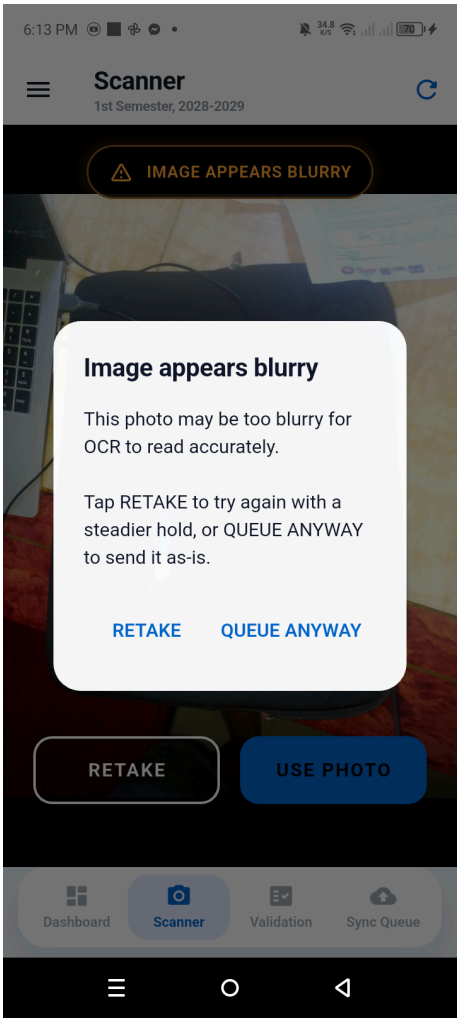
| | |
|---|---|
| **Actual Result (Pass/Fail)** | PASS – Short Bond form captured in good light; preview showed RETAKE / USE PHOTO; after USE PHOTO the scan was queued (counter 12→13) and uploaded; Sync Queue showed SUCCESS (SCAN-1793527757536). Server routed it to Import Errors (instructor_not_found) because the AI read the handwritten name as 'Padz Hanney D. Licayan' and 6 instructors share the surname, so it was held for staff instead of guessed (correct human-in-the-loop). NOT RUN – Scanning a form was not run. |
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a paper SAST form. Step 8 is the data-safety guarantee. If a captured scan can vanish because the network was down, that is the most serious defect this module can have. The old guidance lines "Leave a gap between paper and frame edges", "Hold steady - Plain background - Good lighting" and "TAP TO CAPTURE" no longer exist. If the active term has not loaded yet the snackbar reads "Captured! Held until the active term loads." and the scan waits as pending. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S03 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SCANNER REJECTS POOR CAPTURES [NEGATIVE CASE] | |
| **Revision** | updated - blur/dark dialogs, RETAKE / QUEUE ANYWAY, camera texts | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | On the "Scanner" tab with a paper form. | |
| **Test Data** | One form, deliberately mis-presented. | |
| **Steps** | 1. Deliberately move the device while capturing, or capture out of focus.<br>***Expected:*** The preview shows "IMAGE APPEARS BLURRY" rather than accepting an unreadable scan silently. | |
| | 2. Tap "USE PHOTO" on the blurry capture.<br>***Expected:*** Dialog "Image appears blurry" offers "RETAKE" and "QUEUE ANYWAY". "RETAKE" returns to the camera and nothing is queued. A blurry image is never queued without this choice. | |
| | 3. Tilt the device more than about 30 degrees while aiming.<br>***Expected:*** The pill shows the angle, e.g. "TILT: 35° — HOLD STRAIGHT", and the capture button does nothing until the phone is level. | |
| | 4. Present the form far too small in the frame, or overlapping the frame edges.<br>***Expected:*** The "FIT ... PAPER INSIDE THE FRAME" guidance stays visible, and the preview reminds "Check all 4 corners are visible & image is sharp" so a badly framed capture can be retaken. | |
| | 5. Cover the camera completely, capture, then tap "USE PHOTO".<br>***Expected:*** The preview shows "IMAGE TOO DARK OR OCCLUDED" and a dialog "Image Too Dark or Occluded" offers "RETAKE" or "QUEUE ANYWAY". Nothing is queued unless "QUEUE ANYWAY" is chosen. | |
| | 6. Revoke camera permission in Android settings, then reopen the Scanner tab.<br>***Expected:*** "Camera unavailable. Check that camera permission is granted (Settings → Apps → iEvaluate → Permissions → Camera) and that no other app is using it, then tap Try again." with a "Try again" button. The app does not crash. | |
| | 7. Trigger a camera fault, e.g. open another camera app simultaneously.<br>***Expected:*** The failure is reported (the message above, or the snackbar "Capture failed. Try again, or check that no other app is using the camera."), not swallowed silently. | |
| **Expected Result** | Every unusable capture is refused or clearly warned about before it enters the queue, and camera faults are reported rather than hidden. | |
| **Actual Result (Pass/Fail)** | PARTIAL – Blur banner and dialog shown (this run): 'IMAGE APPEARS BLURRY', and on USE PHOTO the dialog 'Image appears blurry … RETAKE / QUEUE ANYWAY'. Covered-camera step passed in the earlier run. Tilt, too-small, permission and camera-fault steps not run. PARTIAL – With the lens covered, capture showed IMAGE TOO DARK OR OCCLUDED; USE PHOTO opened the dialog Image Too Dark or Occluded with RETAKE / QUEUE ANYWAY; RETAKE returned to the camera and nothing was queued. | |

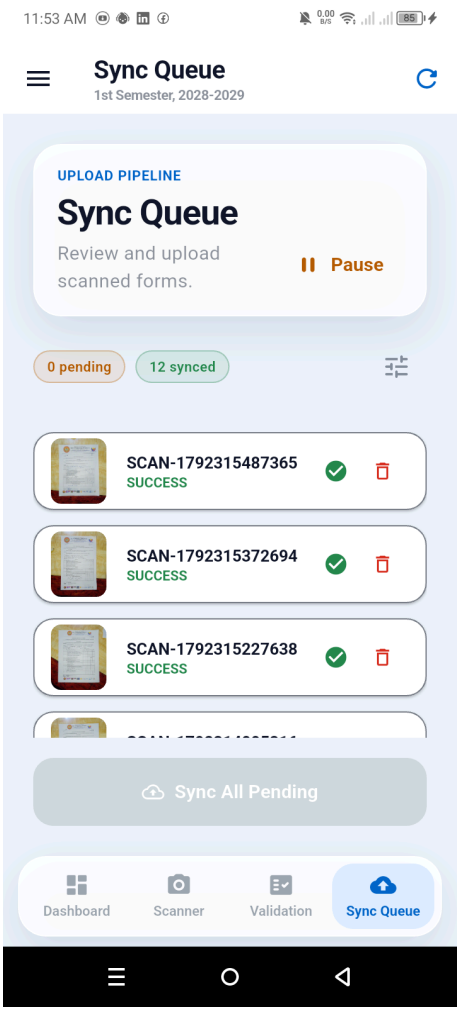
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Step 5 only. Steps 1-4, 6, 7 not run: need a form or camera permission changes. The purpose of this case is that GARBAGE NEVER ENTERS THE PIPELINE. A blurry scan that uploads becomes a failed scan someone has to chase later. Photos that are not SAST forms at all are rejected by the server instead - see TC-S17. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S04 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SYNC QUEUE - UPLOAD PENDING SCANS [LIVE DATA] | |
| **Revision** | updated - synced scans stay listed; duplicate is auto-discarded | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | At least two scans are queued locally from TC-S02 (pause syncing first so they stay pending). Network available. The n8n workflow is running. | |
| **Test Data** | The queued scans. One form already scanned this term, for step 8. | |
| **Steps** | 1. Open the "Sync Queue" tab.<br>***Expected:*** Header "Upload Pipeline", "Sync Queue", "Review and upload scanned forms." Each queued scan is listed with a thumbnail, its id (SCAN-...) and its status, plus chips "N pending" and "N synced". | |
| | 2. With nothing queued (fresh term or after removing all), read the empty state.<br>***Expected:*** Reads "Everything is synced" and "New scans will appear here before upload." | |
| | 3. Confirm the queue count matches the dashboard.<br>***Expected:*** The "pending" chip equals the dashboard "PENDING" counter. | |
| | 4. Tap "Resume" (if paused), then "Sync All Pending".<br>***Expected:*** The button shows "Syncing..." with a spinner and each row shows a spinner while it uploads. It does not hang indefinitely with no feedback. | |
| | 5. Wait for the upload to finish.<br>***Expected:*** Each uploaded scan stays in the list as "SUCCESS" with a green tick. The dashboard "PENDING" falls and "SUCCESS" rises by the number uploaded. | |
| | 6. Verify the uploaded data landed in the database for the correct term and instructor.<br>***Expected:*** Each scan's scores are recorded against the right instructor, subject and term - the ones printed on the paper form - or the scan appears under Validation -> "Failed Scans" for review. | |
| | 7. With every row already SUCCESS, look at the sync button.<br>***Expected:*** "Sync All Pending" is greyed out. No duplicate records can be created by tapping it again. | |
| | 8. Scan the SAME physical form a second time and let it sync.<br>***Expected:*** Snackbar "Already scanned (stamp N): this form is not counted again." and the row reads "ALREADY SCANNED" in orange. The term total does not rise. See TC-S15 for detail. | |
| **Expected Result** | Queued scans upload with visible progress, are marked SUCCESS only on success, land against the correct instructor and term, and duplicates are not counted. | |
| **Actual Result (Pass/Fail)** | PARTIAL – Sync Queue showed Upload Pipeline, 0 pending, 12 synced and SCAN-... rows marked SUCCESS with Remove from queue; pending 0 matched the dashboard PENDING 0. | |

| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Steps 1 and 3 only. Not run: syncing needs queued scans, and removal changes data. Step 8 matters most for score integrity. It relies on the numbering-machine stamp: a form with no readable stamp cannot be caught this way and goes to review instead. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S05 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SYNC QUEUE - FAILURES, PAUSE AND REMOVAL [NEGATIVE, LIVE DATA] | |
| **Revision** | updated - failure texts, Pause/Resume, delete dialogs | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | At least two scans queued. Ability to disable the network and to stop the n8n workflow. | |
| **Test Data** | The queued scans. One throw-away scan to remove in steps 8-10. | |
| **Steps** | 1. Disable all network, then tap "Sync All Pending".<br>***Expected:*** Each row fails with a red message such as "Sync Failed" or "Cannot reach n8n (check IP/URL)" and a retry icon. The scans REMAIN in the queue. Nothing is lost. | |
| | 2. Re-enable the network and sync again (or tap a row's retry icon).<br>***Expected:*** The same scans upload successfully. No scan was dropped by the earlier failure. | |
| | 3. Stop the n8n workflow, then sync.<br>***Expected:*** The failure is reported on the row (or in a "Connection Interrupted" / "No Answer From n8n" dialog). The scans stay queued rather than being marked as sent. | |
| | 4. Restart n8n and sync.<br>***Expected:*** The scans upload successfully. | |
| | 5. Send a page n8n cannot use, e.g. a photo of something that is not a form.<br>***Expected:*** The scan is not silently dropped. Either the "Invalid Scan Rejected" dialog explains why (TC-S17) or it moves to Validation -> "Failed Scans" (TC-S07) where it can be recovered. | |
| | 6. Tap "Pause" in the Sync Queue header.<br>***Expected:*** A "Paused" chip appears, the sync button reads "Sync Paused" and is disabled, and no new captures upload while paused. | |
| | 7. Tap "Resume".<br>***Expected:*** Pending scans upload one by one from where they left off. | |
| | 8. Tap the red trash icon on one scan.<br>***Expected:*** Dialog "Delete this scan?" - "Are you sure you want to remove this scan from the queue? This cannot be undone." Nothing is removed until "Delete" is tapped. | |
| | 9. Tap "Cancel". Then swipe another row to the left and cancel too.<br>***Expected:*** The scan stays in the queue. The swipe asks "Remove from queue?" with "Cancel" and "Remove". | |
| | 10. Confirm one removal.<br>***Expected:*** The scan leaves the queue, its image is deleted from the phone, and the "PENDING" counter falls by one if it was pending. | |
| | 11. Force-close the app with scans still queued, then reopen it.<br>***Expected:*** The queued scans are STILL THERE. The queue survives an app restart. | |

| | |
|---|---|
| **Expected Result** | Every upload failure leaves the scans safely queued, syncing can be paused and resumed, removal requires confirmation, and the queue survives an app restart. |
| **Actual Result (Pass/Fail)** | NOT RUN – Failure, pause and removal were not run. |
| **Screenshot** | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: changes shared data (removal) and needs queued scans. Steps 1, 5 and 11 are the core of this case. A scan lost to a network failure or an app restart is unrecoverable, because the paper form has already been handled and set aside. Removal now deletes the image file too (the older build kept it on the device), so step 10 is final. Code review: the [n8n-proxy] wrapper turns network errors into a plain server error, so the row will most likely say "Sync Failed" and the queue is not auto-paused. Record the exact text shown. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

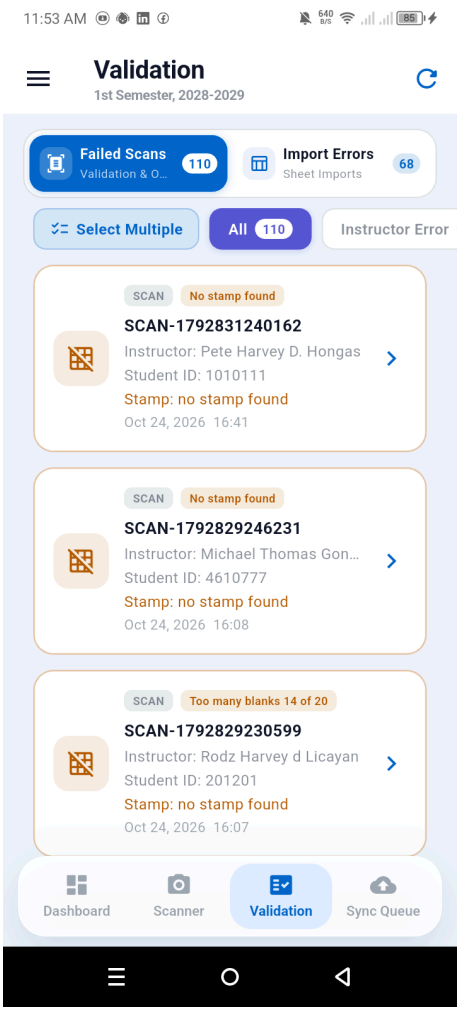
Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S06 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | VALIDATION - CORRECT FLAGGED RECORDS [LIVE DATA] [DESTRUCTIVE] | |
| **Revision** | updated - editor replaced by Import Errors / "Fix Import Error" | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | At least one record in [import_errors] with status pending, typically because the instructor name could not be matched. | |
| **Test Data** | One flagged scan record (tag "SCAN") and one flagged sheet row (tag "GOOGLE SHEET"), with the paper form or the sheet on hand. One throw-away flagged record to discard in step 9. | |

| | |
|---|---|
| **Steps** | 1. Open the "Validation" tab.<br>***Expected:*** Two sections at the top: "Failed Scans / Validation & OMR" and "Import Errors / Sheet Imports", each with a count badge. While loading it reads "Loading records…". |
| | 2. Tap "Import Errors".<br>***Expected:*** Filter chips "All", "Instructor Error" and "Subject Error" with counts. With none it reads "No import errors found" and "All records from import_errors have been addressed." |
| | 3. Read a flagged record card.<br>***Expected:*** Tag "SCAN" or "GOOGLE SHEET", a reason chip "Instructor not found", "Subject not found" or "Instructor & subject not found", the name as read (or "Unknown Instructor"), "Subject: ..." and the date (or "Unknown date"). |
| | 4. Open the record.<br>***Expected:*** Screen "Fix Import Error" with a red banner 'Instructor "<raw>" was not found.' and an "Original Data from Scan" (or "...from Google Sheet") card showing "Instructor (raw)" and "Subject (raw)". |
| | 5. Compare the scores against the paper form or the sheet.<br>***Expected:*** A scan shows "Scores (editable — from Scan)" with "Tap to edit"; a sheet shows "Scores (locked — from Google Sheet)" and "Read-only". Every score matches what the student marked. |
| | 6. On the scan record, try to type 0, 6 or a letter into a score.<br>***Expected:*** Refused - each box accepts only one digit from 1 to 5. A box left empty is sent as unanswered, never as 0. |
| | 7. Tap "Submit & Re-Process" without picking an instructor.<br>***Expected:*** "Select an instructor from the suggestions." Nothing is sent. |
| | 8. Type part of the name into "Correct Instructor Name", pick from the suggestions, do the same for "Correct Subject / Course Code", and tap "Submit & Re-Process".<br>***Expected:*** Button reads "Sending to n8n…", then "✅ Submitted! Data is now being processed." and the record leaves the list. On failure it reads "Error: ..." rather than appearing to succeed. |
| | 9. On a throw-away flagged record, tap "Discard" and confirm.<br>***Expected:*** Dialog "Discard Error?" - "This will mark the record as discarded. The original scan stays in the database." Then "Record discarded." and it leaves the list. |
| | 10. Confirm what submitting and discarding actually did.<br>***Expected:*** The corrected record's scores appear against the instructor named on the paper, for the correct term. The discarded record does NOT count toward any instructor's scores and stays in [import_errors] with status "discarded". |
| **Expected Result** | Flagged records show enough raw detail to be corrected against the paper form, scores are constrained to 1-5, re-processing routes the data to the correct instructor, and discarding is confirmed and understood. |
| **Actual Result (Pass/Fail)** | NOT RUN – Correcting flagged records was not run. |

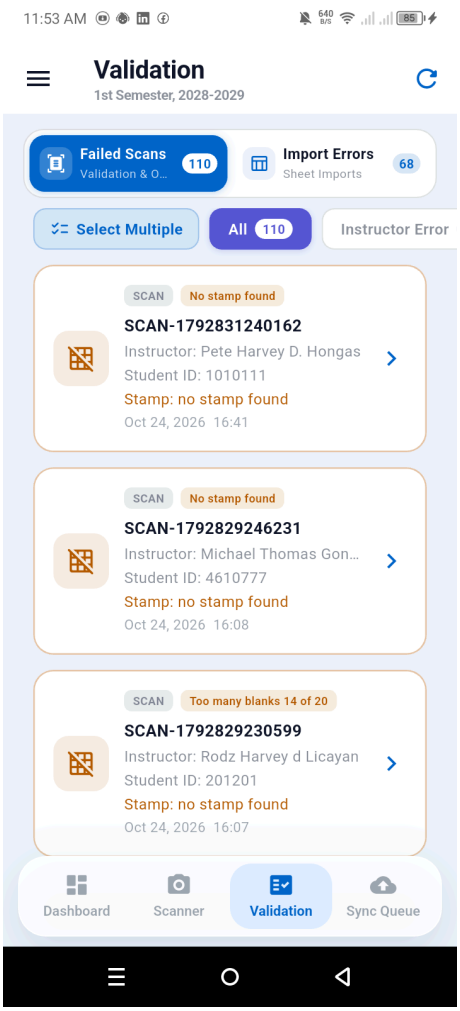
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: changes shared data. The Validation tab opened and showed Failed Scans 110 and Import Errors 68. Step 5 is the whole reason this screen exists. The older build's "Edit Record", "Approve & Sync" and "Data updated and queued for processing." no longer exist; scans the pipeline cannot read go to "Failed Scans" (TC-S07). |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S07 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | FAILED SCANS - RECOVERY QUEUE [DESTRUCTIVE] | |
| **Revision** | updated - now a Validation section; "Correct Failed Scan" screen | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | At least one scan has failed detection and sits in [failed_scan_queue] with status pending, e.g. from TC-S05 step 5. | |
| **Test Data** | One failed scan with its paper form on hand. One throw-away failed scan to discard in step 7. | |
| **Steps** | 1. Open the "Validation" tab ("Failed Scans" is selected by default).<br>***Expected:*** Filter chips "All", "Instructor Error", "Subject Error" and "OMR Result" with counts. With none it reads "No failed scans to validate" and "All scan records in failed_scan_queue have been resolved." | |
| | 2. Read a failed scan card.<br>***Expected:*** Tag "SCAN" and a reason chip - e.g. "Table/corners not detected", "Grid detection failed", "Detection issue", or a stamp reason such as "No stamp found" - plus the task id, "Instructor:", "Student ID:" and "Stamp:" where known, and the date (or "Unknown date"). | |
| | 3. Confirm the reason is specific enough to act on.<br>***Expected:*** The staff member can tell WHY it failed and therefore whether re-scanning would help. A bare "failed" with no reason is not enough. | |
| | 4. Open the failed scan.<br>***Expected:*** Screen "Correct Failed Scan" with the task id, a coloured banner with the reasons (and "Details: ..." where n8n left a note), "Scanned Form Image" with "Tap to zoom", and "Original Data from Scan" showing "Instructor (detected)", "Subject (detected)" and "Table / Grid Detection". | |
| | 5. Correct it: check the "Stamp Number" card (TC-S14), pick the instructor and subject (TC-S13), fix "Student ID" and the scores in "Scores (editable — from Scan)", then tap "Submit & Validate".<br>***Expected:*** "Submitting…", then "Submitted! Correction is being processed." and the screen closes. | |
| | 6. Confirm the outcome of step 5.<br>***Expected:*** The scan leaves the list and its data reaches the correct instructor for the correct term. | |
| | 7. Open the throw-away failed scan, tap "Discard", cancel once, then repeat and confirm.<br>***Expected:*** Dialog "Discard Scan?" - "This will permanently remove this failed scan record. Are you sure?" Cancel keeps it; confirming shows "Scan discarded." and it leaves the list. | |
| | 8. Count the failed and discarded scans against the totals.<br>***Expected:*** Scans that failed or were discarded are NOT counted as gathered on the dashboard or on the admin's "Files Scanned" figure. | |
| **Expected Result** | Every failed scan is listed with a specific, actionable reason and can be recovered or deliberately discarded, and failed scans are never counted as successful. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Discarding failed scans was not run. | |

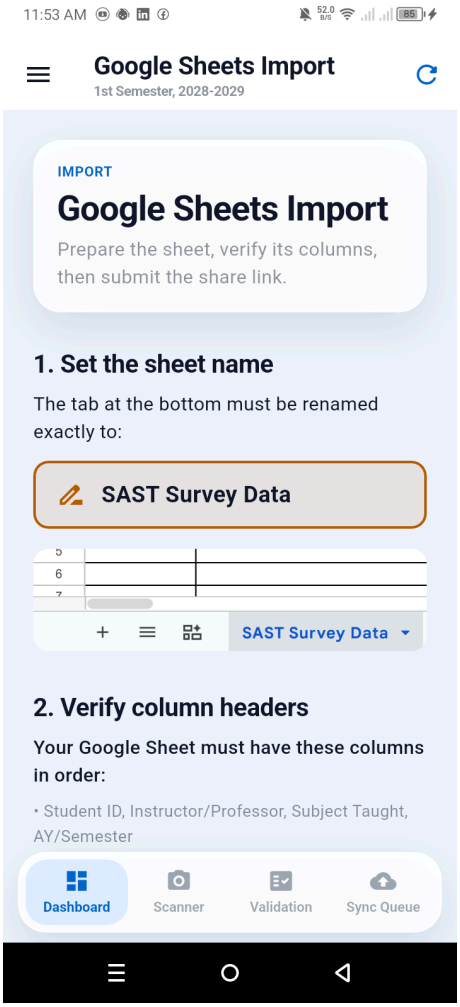
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: changes shared data. Screenshot is the Failed Scans list (110). Step 8 protects the integrity of the reported totals. Step 5 determines whether a failure means real data loss. Code review: "Discard" only sets the row's status to "discarded" in [failed_scan_queue]; the dialog's word "permanently" overstates it. Confirm with the team. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S08 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | IMPORT FROM GOOGLE SHEETS [LIVE DATA] | |
| **Revision** | updated - new import screen, job dialog, errors in Validation | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | A prepared Google Sheet of evaluation data, shared so n8n can read it. The n8n import workflow is running. | |
| **Test Data** | One prepared sheet (tab "SAST Survey Data"), including one deliberately bad row (an instructor name not in iEvaluate). | |
| **Steps** | 1. On the dashboard, tap "IMPORT FROM GOOGLE SHEETS".<br>***Expected:*** Screen "Google Sheets Import" - "Prepare the sheet, verify its columns, then submit the share link." It shows "1. Set the sheet name" with "SAST Survey Data" and "2. Verify column headers" with the expected columns, a link field and "START IMPORT". | |
| | 2. Tap "START IMPORT" with the field empty.<br>***Expected:*** "Please paste the Google Sheet link first". Nothing is sent. | |
| | 3. Paste the link and tap "START IMPORT".<br>***Expected:*** The app returns to the dashboard and shows "Processing Data...", then "Importing…" with "Rows found: N", and ends with a clear "Import Successful" or failure dialog - never an indefinite spinner (details in TC-S12). | |
| | 4. Cross-check the imported rows against the sheet.<br>***Expected:*** "Imported" plus "Not imported (see Import Errors)" equals the rows in the sheet. Nothing is silently skipped. | |
| | 5. Confirm the deliberately bad row was caught.<br>***Expected:*** It is reported rather than imported, and appears under Validation -> "Import Errors" with the tag "GOOGLE SHEET". | |
| | 6. Confirm the imported data landed against the correct term.<br>***Expected:*** The records belong to the active term, not a previous one. | |
| | 7. Import the SAME sheet a second time.<br>***Expected:*** Duplicates are rejected or flagged, NOT counted twice. | |
| | 8. Run the import with n8n stopped.<br>***Expected:*** A clear failure ("Import Failed"). No partial import is left behind. | |
| | 9. Check the dashboard counters after a successful import.<br>***Expected:*** OVERALL SURVEYS increases by the "Imported" count, and by no more. | |
| **Expected Result** | A sheet imports with visible progress and an explicit outcome, bad rows are reported rather than dropped, re-importing does not double-count, and the counters reflect exactly what was imported. | |

| | |
|---|---|
| **Actual Result (Pass/Fail)** | PARTIAL – Run on a phone 2026-11-01 (job 7fb16bdf, rerun d24b35f8). Step 1 OK (screen, old column list, link field, START IMPORT). Step 2 OK ("Please paste the Google Sheet link first"). Step 3 OK (Processing Data..., Importing... Rows found: 98, then "Import Successful"). Step 4 FINDING: dialog said Rows 98, Imported 89, Not imported 5 = 94, not 98; the job message says 4 repeated rows were merged and nobody sees that in the dialog. Step 5 partly OK: 5 rows appear in Validation -> Import Errors tagged GOOGLE SHEET, reason "Subject not found" (Michael Thomas Gonzaga, subject "hell yeah"). Step 6 expected behaviour: no new row appeared in sast_all_raw_data_survey (latest created 2026-10-24) because every sheet row was already stored for 1st Semester 2028-2029 by an earlier import on or before 2026-10-24. Sheet rows were already stored from an earlier import; the import updated them instead of duplicating (duplicate protection works). Step 7 partly OK: the same sheet imported again with the same result (Imported 89) and no rows were counted twice. FINDING (minor bug): 5 more duplicate GOOGLE SHEET error records were added (import errors for sheet rose from 59 to 69 after two imports). Step 8 not run (n8n cannot be stopped from the phone). Step 9 expected behaviour: OVERALL SURVEYS stayed 1173 before and after both imports, because no new rows were stored. Older text: NOT RUN – Sheet import was not run. |
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a Google Sheet link. The Google Sheets Import screen opened; its help lists only the old column layout (Student ID, M1-M10, P1-P10) while the SAST Guidelines accept the new layout too. Step 7 is the one most likely to fail quietly and the most damaging if it does. Confirm the intended behaviour with the team: sheet rows carry no stamp number. The drawer item "Google Sheet / Form Import" and the link icon on the Scanner open the same screen. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

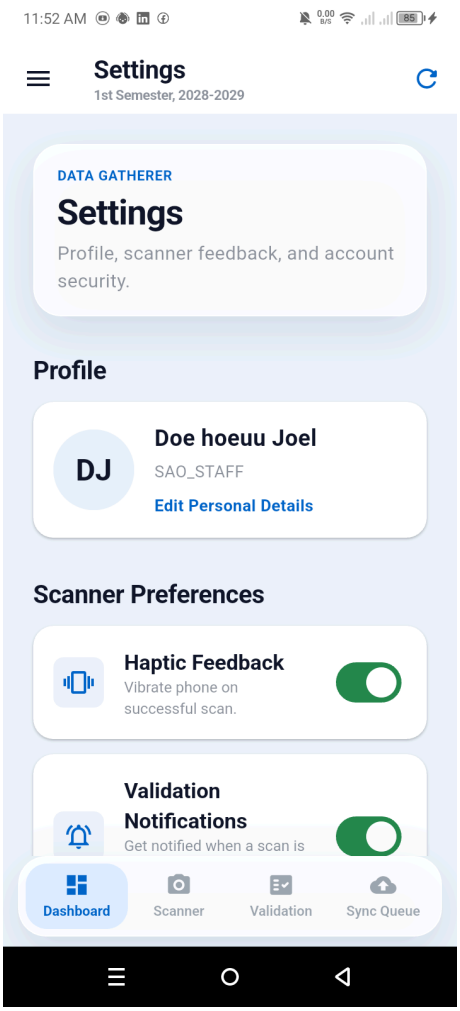
Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S09 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | STAFF SETTINGS AND END OF SHIFT | |
| **Revision** | updated - Edit Profile dialog, Help section, logout/deactivate | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | Signed in as SAO staff. Access to the account's inbox for the email change. | |
| **Test Data** | A new password of at least six characters, NOT recorded in this document. At least one unsynced scan for step 9. | |

| | |
|---|---|
| **Steps** | 1. Open the drawer, then "Settings".<br>***Expected:*** The screen loads (briefly "Loading gatherer settings…"), reads "Data Gatherer" / "Settings" / "Profile, scanner feedback, and account security." with sections "Profile", "Scanner Preferences", "Help" and "Security" ("Email, password, and account controls."). |
| | 2. Tap "Edit Personal Details", change the name and tap "Save Changes".<br>***Expected:*** Dialog "Edit Profile" warns that the name must match official school records. "Profile updated successfully!" and the new name appears in the drawer. Blank names give "Please fill in both first and last name." |
| | 3. Toggle "Haptic Feedback" off and on.<br>***Expected:*** The setting changes and persists after leaving and reopening Settings. |
| | 4. Tap "Edit Email" and submit a valid new address.<br>***Expected:*** Message reads "Email updated! Check your inbox for confirmation." The old address keeps working until the link is clicked. The current address gives "This is already your current email address." |
| | 5. Tap "Edit Password" and submit mismatched passwords.<br>***Expected:*** Dialog "Change Password" refuses with "Passwords do not match." Empty fields give "Please fill in all fields." |
| | 6. Submit a password shorter than six characters.<br>***Expected:*** Refused with "Password must be at least 6 characters." |
| | 7. Submit a fully valid password change.<br>***Expected:*** Message reads "Password updated successfully. Please log in again." and the app signs out. On failure it reads "Failed to update password." or "Error: ...". |
| | 8. Sign in with the old password, then the new one.<br>***Expected:*** The old password is rejected; the new one is accepted. |
| | 9. Queue at least one unsynced scan, then tap "End Shift & Log Out".<br>***Expected:*** Dialog "Log Out" - "You'll return to the sign-in screen. Any synced work will remain available." with "Log out" and "Cancel". IMPORTANT: either the staff member is warned that scans are still pending, or the scans survive the logout. |
| | 10. Complete the logout, sign back in, and check the Sync Queue.<br>***Expected:*** The pending scans are still there and can be synced. |
| | 11. Open "Deactivate My Account", then CANCEL.<br>***Expected:*** Dialog "Deactivate Account?" - "Your account will be deactivated and you will no longer be able to access it unless you ask the SAO Admin to reactivate it." with "Send Code". Cancelling leaves the account active. |
| **Expected Result** | The staff member can maintain their own account with every password rule enforced, and ending a shift never loses queued scans. |
| **Actual Result (Pass/Fail)** | PARTIAL – Settings showed Data Gatherer / Settings with Profile, Scanner Preferences (Haptic Feedback, Validation Notifications), Help and Security; Deactivate My Account opened Deactivate Account? and Cancel left the account active. |

| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Steps 1 and 11 only. Steps 2-10 not run: they change the profile, email, password or queue. A 'Validation Notifications' toggle exists beyond the case text. Steps 9 and 10 are the important ones. "End Shift & Log Out" is exactly when a tired user is most likely to lose unsynced work. The logout dialog does not mention pending scans; the queue is stored per account on the phone, so step 10 should pass. Settings -> "Help" -> "SAST Guidelines" is TC-S11. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S10 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | PROFILE COMPLETION DIALOG AFTER SIGN-IN | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF (an account with a blank Staff ID and/or address) | |
| **Preconditions** | App on the Login screen. In [user_info] the account's university_id or address is empty. | |
| **Test Data** | A test SAO_STAFF account missing both ID and address. A valid Staff ID (4-30 letters, numbers or hyphens) and an address. | |
| **Steps** | 1. Sign in with the test account.<br>***Expected:*** The dashboard appears, then dialog "Complete your information" - "Your profile is missing your Staff ID and your address. Please add them to continue. This information is required." | |
| | 2. Tap outside the dialog, then press the Android back button.<br>***Expected:*** The dialog stays open. It has only "Log out" and "Save" - there is no "Later". | |
| | 3. Tap "Save" with every field empty.<br>***Expected:*** "Staff ID is required", "House number / street is required" and "Barangay is required" are shown. Nothing is saved. | |
| | 4. Type a 2-character Staff ID and save.<br>***Expected:*** "Staff ID must be at least 4 characters". | |
| | 5. Tap "Log out".<br>***Expected:*** The app returns to the Login screen. Signing in again asks the same questions. | |
| | 6. Fill a valid Staff ID, "House No. / Street / Purok" and the barangay (pick from the list if offered), then tap "Save".<br>***Expected:*** The dialog closes with "Your information has been saved." | |
| | 7. Log out and sign in again.<br>***Expected:*** The dialog does not appear; the values are in [user_info]. | |
| **Expected Result** | A staff account with a missing ID or address cannot use the app until it is completed, and can always leave by logging out. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Profile-completion dialog was not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a staff account with a blank Staff ID or address; the test account showed no dialog. If only one item is missing, the dialog asks only for that one ("...missing your address. Please add it..."). | |
| **Tester Name / Date** | | |

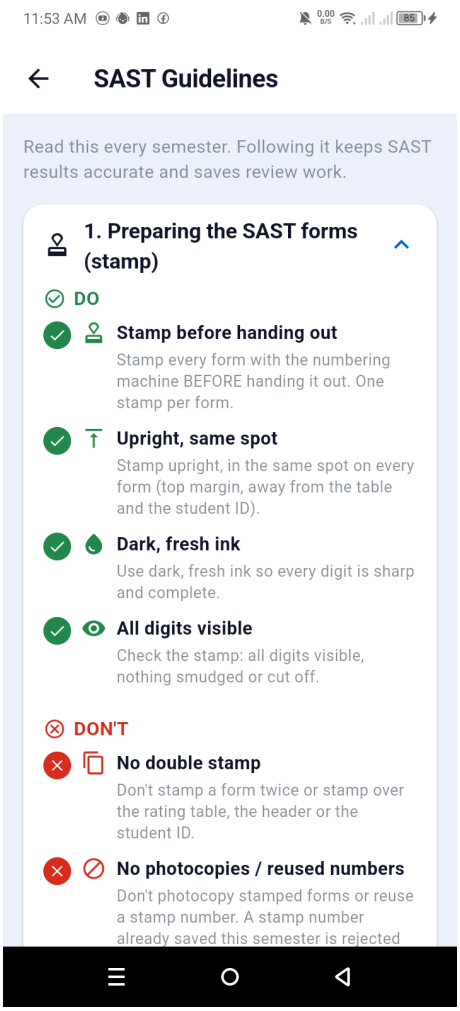
| | |
|---|---|
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S11 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SAST GUIDELINES SCREEN | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | Signed out. The guide has not been acknowledged on this phone for the active term (fresh install or cleared app data). | |
| **Test Data** | View only. | |
| **Steps** | 1. Sign in and wait for the dashboard.<br>***Expected:*** A full-screen "SAST Guidelines" opens by itself: "Read this every semester. Following it keeps SAST results accurate and saves review work." | |
| | 2. Read the section list.<br>***Expected:*** Five sections from "1. Preparing the SAST forms (stamp)" to "5. Importing a Google Sheet", the first one open, each with DO and DON'T items, and "Questions? Contact the SAO admin." | |
| | 3. Check the rules that the server enforces.<br>***Expected:*** The guide says only a check or a slash counts, that a form with fewer than 5 answers is not counted, and that a stamp number already saved this semester is rejected as a duplicate. | |
| | 4. Press back without acknowledging, then restart the app.<br>***Expected:*** The guide opens again on the next start. | |
| | 5. Tap "I have read this".<br>***Expected:*** The guide closes. Restarting the app does not show it again in the same term. | |
| | 6. Open Settings -> "Help" -> "SAST Guidelines" ("Stamping, filling, scanning, review, import.").<br>***Expected:*** The same guide opens, without the "I have read this" button. | |
| **Expected Result** | Every gatherer sees the SAST rules once per term and can reopen them from Settings at any time. | |
| **Actual Result (Pass/Fail)** | PARTIAL – Settings > Help > SAST Guidelines opened the guide with a back arrow and no 'I have read this' button, same text as the admin guide. | |

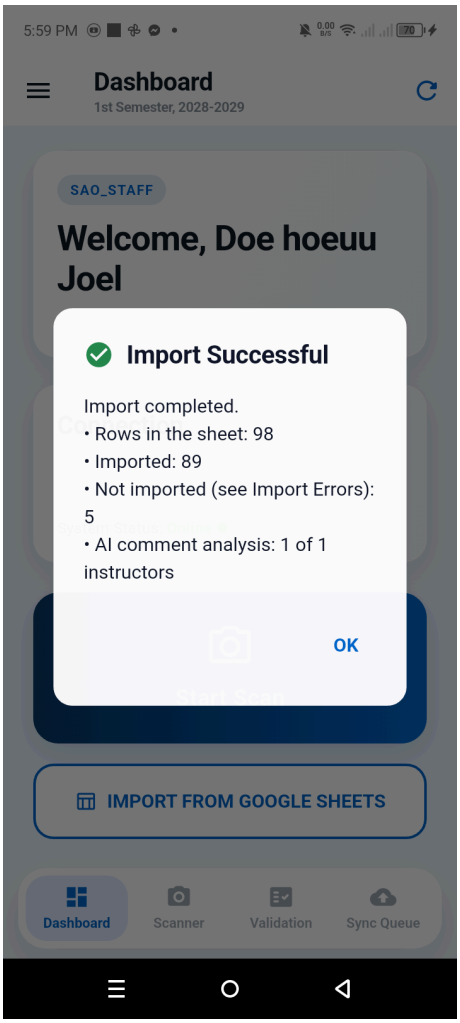
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Steps 2, 3 (partly) and 6 run. Step 1: the guide did not open by itself after staff sign-in on this build. Steps 4-5 not run. The acknowledgement is stored on the phone per account and per term, so a new phone or cleared data shows it again. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S12 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | GOOGLE SHEET IMPORT JOB - PROGRESS AND FINAL COUNTS [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | The n8n import workflow is running. On the "Google Sheets Import" screen. | |
| **Test Data** | A Google Sheet link (tab "SAST Survey Data", about 20 rows, one row with an unknown instructor). A second sheet link that is NOT shared. A note of OVERALL SURVEYS before the import. | |
| **Steps** | 1. Paste the unshared link and tap "START IMPORT".<br>***Expected:*** "Import Failed" with the reason n8n gives (no access, not found or no rows), or "Server returned an error (<code>)." Not a success. | |
| | 2. Paste the good link and tap "START IMPORT".<br>***Expected:*** "Processing Data..." ("Please wait, we are validating and processing your Google Sheet data..."), then "Importing…" with "Rows found: N" and "Saving the rows and analysing the comments. This can take several minutes for a big sheet. Please keep this screen open." | |
| | 3. Try to close the "Importing…" dialog by tapping outside or back.<br>***Expected:*** It cannot be dismissed while the job runs. | |
| | 4. Wait for the job to finish.<br>***Expected:*** "Import Successful" - "Import completed." with "• Rows in the sheet: N", "• Imported: X", "• Not imported (see Import Errors): Y" and, if comments were analysed, "• AI comment analysis: a of b instructors". | |
| | 5. Compare the counts with [sheet_import_jobs] for this job and with the sheet.<br>***Expected:*** The dialog counts match the job row; X + Y equals N. | |
| | 6. Check the dashboard and Validation -> "Import Errors".<br>***Expected:*** OVERALL SURVEYS rose by X. Y records with tag "GOOGLE SHEET" wait in "Import Errors". | |
| | 7. If the job reports a problem (e.g. AI analysis fails), read the dialog.<br>***Expected:*** "Import Finished With Problems" with n8n's message, "Failed at step: <node>." and the counts so far. | |
| **Expected Result** | A sheet import shows "processing" while it runs and ends with the real final counts, or a clear reason it failed. | |

| | |
|---|---|
| **Actual Result (Pass/Fail)** | PARTIAL – Run on a phone 2026-11-01. Step 1 PASS: the not-found link (ID 1aaaa...) gave "Import Failed - The sheet has no data rows (tab SAST Survey Data)." Step 2 PASS: "Processing Data..." then "Importing..." with "Rows found: 98" and the "Saving the rows ... keep this screen open" text. Step 3 PASS: tap outside and Back did not close the dialog. Step 4 PASS: "Import Successful - Import completed. Rows in the sheet: 98, Imported: 89, Not imported (see Import Errors): 5, AI comment analysis: 1 of 1 instructors" (job took about 20 seconds). Step 5 FINDING: dialog matches the job row (98/89/5) but X + Y = 94, not 98 (job: matched 93, unmatched 5, 4 repeated rows merged). Step 6 expected behaviour: OVERALL SURVEYS stayed 1173 because every sheet row was already stored for 1st Semester 2028-2029 by an earlier import on or before 2026-10-24. Sheet rows were already stored from an earlier import; the import updated them instead of duplicating (duplicate protection works). Validation -> Import Errors holds the 5 GOOGLE SHEET records (Subject not found). Step 7 not run (no problem case occurred). Older text: NOT RUN – Sheet import job was not run. |
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a Google Sheet link. If the job runs longer than 60 minutes the app shows "Still Importing" and asks to check before sending the sheet again. With no active term loaded the app refuses with "No active term loaded yet. Try again in a moment." |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S13 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | CORRECTION PICKERS - NOT SAVED, PICK FROM THE LIST [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | A failed scan with an instructor or subject problem is in Validation -> "Failed Scans" ("Instructor Error" chip). | |
| **Test Data** | One flagged scan and its paper form. An instructor name that matches two people or nobody (e.g. a surname only). | |
| **Steps** | 1. Open the flagged scan.<br>***Expected:*** "Correct the Scan Data" - "The instructor and subject were pre-selected from the scan where it was clear..." Each picker shows "Scan read: <text>" above it. | |
| | 2. Clear "Instructor (search and pick)" and type part of a name.<br>***Expected:*** A suggestion list appears; placeholder accounts are marked "(placeholder)". Picking one shows a green tick. | |
| | 3. Type a name without picking it and tap "Submit & Validate".<br>***Expected:*** "Pick the instructor from the list before submitting." and the field reads "Pick the instructor from the list". Nothing sent. | |
| | 4. Turn the network off, reopen the scan so the lists fail to load, then turn the network back on.<br>***Expected:*** The pickers say "Instructor list unavailable: the typed name is sent as it is." (and the same for the subject). | |
| | 5. Type the ambiguous name and tap "Submit & Validate".<br>***Expected:*** n8n answers HTTP 422. A red snackbar starts "Not saved" and asks to pick from the list; the picker is marked and "Did you mean:" chips list the candidates. The scan stays in the list. | |
| | 6. Tap the right candidate chip and submit again.<br>***Expected:*** "Submitted! Correction is being processed." The scores reach the chosen instructor. | |
| **Expected Result** | A correction is credited only to an instructor and subject picked from the list; an unknown or ambiguous name is never saved and the staff member is shown candidates. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Correction pickers were not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a flagged record to correct; changes shared data. The snackbar text comes from n8n; the app's fallback is "Not saved: pick the instructor and subject from the list and submit again." Record the exact text shown. | |
| **Tester Name / Date** | | |

| | |
|---|---|
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S14 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | CORRECTION WITH A STAMP ALREADY SAVED THIS TERM (409) [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | A failed scan is in Validation -> "Failed Scans". A form with a known stamp number is already counted this term. | |
| **Test Data** | The stamp number of the already counted form, and the real stamp number of the flagged form. | |
| **Steps** | 1. Open the failed scan and read the "Stamp Number" card.<br>***Expected:*** A status chip ("Read", "Not found", "Unreadable", "Several found" or "Not checked"), "Read from scan", a plain-English reason where needed and the field "Stamp number" with "Digits exactly as printed, keep leading zeros (3–12)." | |
| | 2. Where several numbers were seen, read the choices.<br>***Expected:*** "Stamped numbers found — tap the right one:" with one chip per number; tapping fills the field. | |
| | 3. Type "12" and tap "Submit & Validate".<br>***Expected:*** "A stamp number has at least 3 digits." Nothing is sent. | |
| | 4. Type the stamp number of the already counted form and submit.<br>***Expected:*** n8n answers HTTP 409. Snackbar "Not saved: Stamp <N> is already saved this term (saved on <date>), so that form is already counted. Check the number on the paper and fix it, or discard this scan if it is the same form." The field reads "Already saved this term. Check the number." The scan stays. | |
| | 5. Edit the number.<br>***Expected:*** The error and the red box clear. | |
| | 6. Type the real stamp number from the paper and submit.<br>***Expected:*** "Submitted! Correction is being processed." | |
| | 7. On a form with no stamp, tick "This form has no stamp" and submit.<br>***Expected:*** The field is disabled and the correction is sent with no stamp. | |
| **Expected Result** | A correction can never save a stamp number that is already counted this term, and the staff member is told why. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Stamp-conflict correction was not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a stamp already saved this term. When the scan reported a missing, unreadable or multiple stamp, an empty field gives 'Type the stamp number, or tick "This form has no stamp".' | |

| | |
|---|---|
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

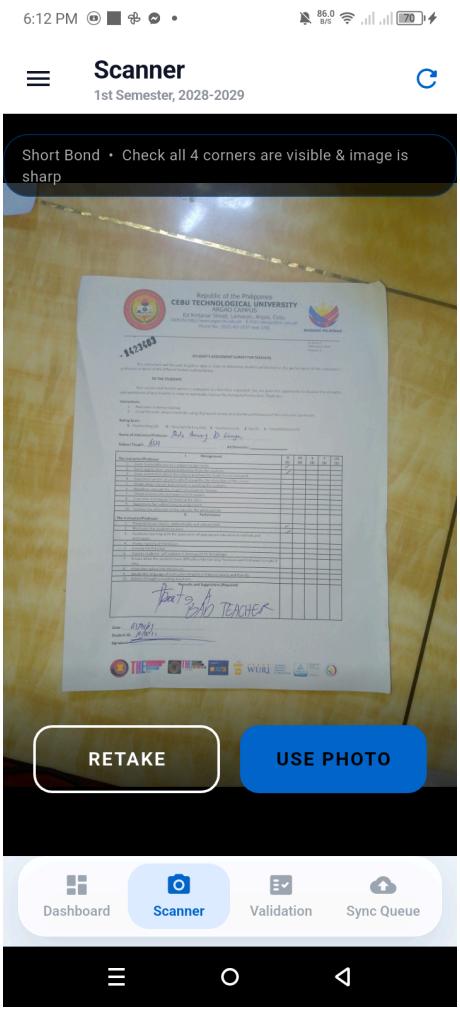
| | | |
|---|---|---|
| **Test Case ID** | TC-S15 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | RESCAN OF A FORM ALREADY SCANNED - AUTO-DISCARD [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | On the "Scanner" tab. Syncing not paused. n8n running. | |
| **Test Data** | One stamped form already scanned and counted this term. Note OVERALL SURVEYS on the dashboard. | |
| **Steps** | 1. Scan the already counted form again and tap "USE PHOTO".<br>***Expected:*** "Captured! Syncing in background..." and the upload starts. | |
| | 2. Wait for n8n to answer.<br>***Expected:*** Orange snackbar "Already scanned (stamp <N>): this form is not counted again." | |
| | 3. Open the "Sync Queue".<br>***Expected:*** The row reads "ALREADY SCANNED" with n8n's message (e.g. "Discarded automatically: this form was already scanned (stamp <N>), so it is not counted.") and an orange copy icon - not a green tick, no retry icon. | |
| | 4. Check the dashboard and the Validation tab.<br>***Expected:*** OVERALL SURVEYS did not rise. The scan is not waiting in "Failed Scans". | |
| **Expected Result** | A paper form whose stamp number is already saved this term is discarded by the server, and the gatherer is told so. | |
| **Actual Result (Pass/Fail)** | NOT RUN – see Comments | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a form whose stamp was already accepted and stored this term; the test form went to Import Errors so its stamp was not stored. | |
| **Tester Name / Date** | | |
| **Panelist's Remarks** | | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S16 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | FORM WITH FEWER THAN 5 OF 20 ANSWERS - AUTO-DISCARD [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | On the "Scanner" tab. Syncing not paused. n8n running. | |
| **Test Data** | Three stamped test forms with unused stamp numbers: (a) 4 rows ticked, (b) exactly 5 rows ticked, (c) 10 rows marked with X only. Agree with the team which instructor they name. | |
| **Steps** | 1. Scan form (a).<br>***Expected:*** Orange snackbar with n8n's message, starting "Discarded automatically". The Sync Queue row reads "DISCARDED (FEWER THAN 5 ANSWERS)" with that message and a block icon. | |
| | 2. Check the totals.<br>***Expected:*** OVERALL SURVEYS did not rise; the form is not in "Failed Scans". | |
| | 3. Scan form (b).<br>***Expected:*** Accepted normally (SUCCESS) or held for review - NOT discarded. | |
| | 4. Scan form (c).<br>***Expected:*** X marks are not answers, so it is discarded as fewer than 5 answers (or flagged for review), never counted as 10 answers. | |
| **Expected Result** | Forms with fewer than 5 real answers are not counted, the gatherer sees why, and the 5-answer boundary is honoured. | |
| **Actual Result (Pass/Fail)** | PARTIAL – A form with 4 answers was captured and uploaded. Server stored it as discarded with the note 'Fewer than 5 of the 20 items were answered (only 4), so this form was discarded automatically and is not counted.' (reasons too_few_answers_4_of_20, stamp_unconfirmed; agreement 85%). FINDING: the Sync Queue row shows SUCCESS instead of DISCARDED, so staff cannot see in the queue that the form was discarded. NOT RUN – Fewer-than-5-answers form was not run. | |

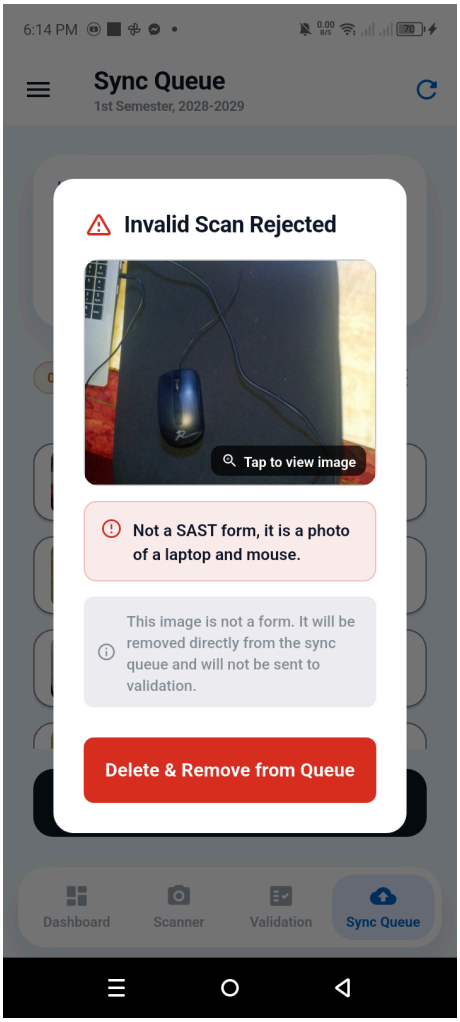
| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a form with fewer than 5 answers. Only check (✓) or slash (/) marks count (see TC-S11). Form (b) becomes real data for the named instructor; use a test instructor or discard it afterwards. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S17 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | NOT-A-SAST-FORM IMAGE IS REJECTED [NEGATIVE CASE] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | On the "Scanner" tab. Syncing not paused. n8n running. | |
| **Test Data** | Something that is not a SAST form: a plate of food, a selfie, or another school form (e.g. an undertaking). | |
| **Steps** | 1. Photograph the object and tap "USE PHOTO" (choose "QUEUE ANYWAY" if a blur or dark warning appears).<br>***Expected:*** The scan is queued and uploads. | |
| | 2. Wait for n8n to answer.<br>***Expected:*** Dialog "Invalid Scan Rejected" with a thumbnail ("Tap to view image"), the reason from n8n (or "This is not a valid SAST evaluation form.") and "This image is not a form. It will be removed directly from the sync queue and will not be sent to validation." | |
| | 3. Tap the thumbnail.<br>***Expected:*** The full image opens, marked "NOT A SAST FORM - REJECTED". | |
| | 4. Go back and tap "Delete & Remove from Queue".<br>***Expected:*** "Invalid scan deleted and removed from queue." The app moves to the "Sync Queue" tab and the scan is gone. | |
| | 5. Check the Validation tab and the totals.<br>***Expected:*** Nothing was added to "Failed Scans" and nothing was counted. | |
| **Expected Result** | Images that are not SAST forms are rejected with a reason and never reach validation or the scores. | |
| **Actual Result (Pass/Fail)** | PASS – A photo of a laptop and mouse was queued anyway; the app showed 'Invalid Scan Rejected – Not a SAST form, it is a photo of a laptop and mouse.' with 'Delete & Remove from Queue'; nothing was saved. NOT RUN – Not-a-SAST-form image was not run. | |

| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a physical non-SAST page in front of the camera. The dialog has only the delete button. If a real form is wrongly rejected, the image is gone and the paper must be scanned again - confirm with the team that this is wanted. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S18 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | OMR VS GEMINI DISAGREEMENT ON A FAILED SCAN [LIVE DATA] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | A failed scan whose Python OMR and Gemini readings disagree ([failed_scan_queue].omr_comparison has disputed rows). | |
| **Test Data** | That flagged scan and its paper form. | |
| **Steps** | 1. Open Validation -> "Failed Scans" -> chip "OMR Result".<br>***Expected:*** The scan is listed with its OMR reason chip. | |
| | 2. Open it.<br>***Expected:*** The banner lists the review reasons (an OMR dispute is shown in indigo). | |
| | 3. Scroll to "OMR Engine Cross-Check Details".<br>***Expected:*** A chip "N disputed" and "Python OMR and Gemini AI disagreed on the following bubble rows. Reconciled values were pre-filled below for your review:" Each row shows the item (e.g. M3), "Python: x", "Gemini: y" and "Used: z"; a weak Python read has a warning icon. | |
| | 4. Compare every disputed item with the paper.<br>***Expected:*** The "Used" value is pre-filled in "Scores (editable — from Scan)" and can be corrected. | |
| | 5. Fix any wrong item and tap "Submit & Validate".<br>***Expected:*** "Submitted! Correction is being processed." The final scores equal the marks on the paper. | |
| **Expected Result** | When the two readers disagree, the staff member sees both readings and decides with the paper in hand. | |
| **Actual Result (Pass/Fail)** | NOT RUN – OMR vs Gemini case was not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: needs a paper form. The section is hidden when there is no disagreement. | |
| **Tester Name / Date** | | |
| **Panelist's Remarks** | | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S19 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SYNC QUEUE KEPT ACROSS RESTART UNTIL TERM CHANGE [DESTRUCTIVE] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF, plus SAO_ADMIN to change the active term | |
| **Preconditions** | Agreed time window: changing the active term affects every user and clears every gatherer's local queue. | |
| **Test Data** | In the Sync Queue: two SUCCESS scans, one "ALREADY SCANNED" scan (TC-S15) and one pending scan (paused). The old and new term names. | |
| **Steps** | 1. Note the chips ("N pending", "N synced") and the dashboard counters. Force-close the app and reopen it.<br>***Expected:*** Every row is still listed with the same status and the same counts. SUCCESS on the dashboard did not reset to 0. | |
| | 2. Log out and sign back in.<br>***Expected:*** Same rows and counts as step 1. | |
| | 3. Look at the "ALREADY SCANNED" row after the restart.<br>***Expected:*** It still reads "ALREADY SCANNED", not "SUCCESS". | |
| | 4. Keep the pending scan unsynced. Have the SAO admin change the active term.<br>***Expected:*** "Updating term…" - "The active term is now <term>. Reloading your data." The app bar shows the new term. | |
| | 5. Open the Sync Queue.<br>***Expected:*** Synced rows from the old term are cleared ("Everything is synced" if nothing else is left). The pending scan must NOT be silently lost: it is uploaded first, or the gatherer is warned. | |
| | 6. Have the SAO admin set the original term back.<br>***Expected:*** The app follows the change again. | |
| **Expected Result** | Uploaded scans stay visible across restarts and logouts for the whole term and are cleared only by a term change, and a term change never silently loses an unsynced scan. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Queue-across-restart/term case was not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: changes shared data. Code review: on a term change the app deletes every queued scan, pending ones included, with their images; and the restart restores rows without their "ALREADY SCANNED" / "DISCARDED" outcome. Expect steps 3 and 5 to FAIL; raise defects if they do. | |
| **Tester Name / Date** | | |

| | |
|---|---|
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S20 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | MULTI-SELECT DELETE IN SYNC QUEUE AND VALIDATION [DESTRUCTIVE] | |
| **Revision** | new | |
| **Account Needed** | SAO_STAFF | |
| **Preconditions** | At least three scans in the Sync Queue. At least three throw-away records in Validation ("Failed Scans" and "Import Errors"). | |
| **Test Data** | Records created for this test only. | |
| **Steps** | 1. In the Sync Queue tap the tune icon ("Select multiple"), or long-press a row.<br>***Expected:*** A bar "x/y selected" with a select-all box, "Delete (n)" and "Done"; rows show checkboxes; swiping is off. | |
| | 2. Select two rows, tap "Delete (2)", then "Cancel".<br>***Expected:*** Dialog "Delete selected scans?" - "Are you sure you want to remove 2 scans from the queue? This cannot be undone." Cancel keeps them. | |
| | 3. Repeat and tap "Delete".<br>***Expected:*** Both rows and their images are removed; "Done" leaves the mode. | |
| | 4. In Validation -> "Failed Scans", tap "Select Multiple" (or long-press a card) and tick the select-all box.<br>***Expected:*** Only the cards in the current chip are selected ("x/y selected"). | |
| | 5. Switch to "Import Errors".<br>***Expected:*** The selection is cleared. | |
| | 6. Select two throw-away records, tap "Delete (2)" and confirm.<br>***Expected:*** Dialog "Delete selected records?" - "Delete 2 records? These records will be permanently removed from the system. This cannot be undone." Then "2 records removed." | |
| | 7. Check the database.<br>***Expected:*** Failed scans are set to "discarded" in [failed_scan_queue]; import errors are deleted from [import_errors]. | |
| **Expected Result** | Many items can be removed at once, only after a clear confirmation, and only the items actually selected. | |
| **Actual Result (Pass/Fail)** | NOT RUN – Multi-select delete was not run. | |
| **Screenshot** | | |
| **Comments / Attachments (Screenshots, Logs)** | Not run: changes shared data. Code review: batch delete really deletes [import_errors] rows, while the single "Discard" (TC-S06) keeps them as "discarded". Confirm with the team which is intended. | |
| **Tester Name / Date** | | |

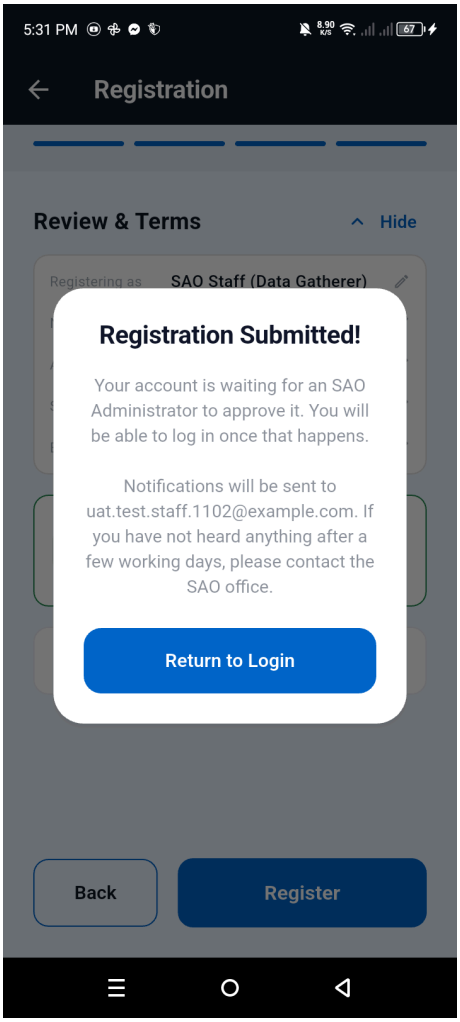
| | |
|---|---|
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

| | | |
|---|---|---|
| **Test Case ID** | TC-S21 | |
| **Capstone Project Title:** | iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation | |
| **Team** | ERMM | |
| | **Project Leader:** | Rodz Harvey Licayan |
| | **Front-End Programmer:** | Michael Thomas Gonzaga |
| | **QA Engineer:** | Mark Lawrence Medillo |
| | **Technical Writer:** | Evangeline Caruana |
| **Title / Business Scenario** | SIGN UP AS SAO STAFF - NO COLLEGE OR DEPARTMENT | |
| **Revision** | new | |
| **Account Needed** | none (new registration; SAO_ADMIN to reject it afterwards) | |
| **Preconditions** | App on the Login screen. | |
| **Test Data** | A disposable email address and Staff ID for the new account. | |
| **Steps** | 1. Tap "Register". In "I am registering as" pick "SAO Staff (Data Gatherer)".<br>***Expected:*** The role is listed; "SAO Admin" is not. | |
| | 2. Continue to step 2 of the form.<br>***Expected:*** Heading "Personnel Details" with "Registering as SAO Staff (Data Gatherer).", a "Staff ID" field and "Institutional Email". No "Select College" and no "Select Department". | |
| | 3. Type a Staff ID.<br>***Expected:*** "This Staff ID is available" or "This Staff ID is already registered". | |
| | 4. Go back and pick an instructor role instead.<br>***Expected:*** Heading "Academic Information" with "University ID" and "Select College"; continuing without one gives "Please select a college". | |
| | 5. Switch back to "SAO Staff (Data Gatherer)".<br>***Expected:*** The college and department fields disappear again. | |
| **Expected Result** | The college picker added for faculty never applies to SAO staff, who register with a Staff ID only. | |
| **Actual Result (Pass/Fail)** | PARTIAL – Register listed no SAO Admin role; picking SAO Staff (Data Gatherer) led to Personnel Details with 'Registering as SAO Staff' and no college or department picker. | |

| | |
|---|---|
| **Screenshot** |  |
| **Comments / Attachments (Screenshots, Logs)** | Steps 1 and 2 run; stopped before submitting. Steps 3-5 not run. Stop before the final submit unless the SAO admin will reject the test registration afterwards. |
| **Tester Name / Date** | |
| **Panelist's Remarks** | |

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

## SUMMARY

```
Total cases     : 21  (9 updated, 12 new, 0 unchanged, 0 removed)
Executed        : 1 partial on an older build (TC-S01 steps 1, 3, 4,
                  31/08/2026). Must be re-run on this build.
Not executed    : 21 on the 2026-10-28 build

Cases that change live data : TC-S02, S04, S05, S06, S08, S12, S13, S14,
                              S15, S16, S18
Destructive (shared data)   : TC-S06, S07, S19, S20
Negative cases              : TC-S03, TC-S05, TC-S17

WHAT THIS DOCUMENT EXISTS TO PROVE
  1. A captured scan is stored locally BEFORE any upload      (TC-S02/8)
  2. A failed upload leaves scans queued, never dropped       (TC-S05/1)
  3. The queue survives restarts until the term changes       (TC-S05/11,
                                                               S19)
  4. Ending a shift does not discard unsynced scans           (TC-S09/9,10)
  5. Unreadable captures are refused before they queue        (TC-S03, S17)
  6. Failed scans carry an actionable reason and can recover  (TC-S07)
  7. The same form is never counted twice                     (TC-S04/8,
                                                               S08/7, S14,
                                                               S15)
  8. A staff account cannot reach any admin screen            (TC-S01/2)
  9. Forms with fewer than 5 answers are not counted          (TC-S16)
 10. Corrections credit only a picked instructor and subject  (TC-S13)

Items 1 to 4 are about DATA LOSS. A paper form is handled once, so a scan
lost anywhere in this pipeline is gone for good. Treat any failure in those
four as the highest-severity defect in the project, ahead of anything
cosmetic.

CODE-REVIEW RISKS TO CONFIRM BY TEST (no DEF number until reproduced)
  - Term change deletes pending, unsynced scans too         (TC-S19/5)
  - Restart drops the "ALREADY SCANNED" / "DISCARDED" label  (TC-S19/3)
  - Batch delete removes import errors; single discard keeps (TC-S20/7)
  - Not-a-form rejection has no way to keep the image        (TC-S17)
  - "SUCCESS / synced this session" now persists all term    (TC-S01/5)

CROSS-CHECK ALREADY CONFIRMED (older build, 31/08/2026)
  The staff dashboard's term total (152) matched the SAO admin dashboard's
  "152 Files Scanned" for the same term, so the two roles agreed on how much
  data had been gathered. Repeat it on this build in TC-S01 step 5.
```

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

## SIGN-OFF

Tester : _____ Date: _____

QA Engineer : Mark Lawrence Medillo _____ Date: _____

Project Leader : Rodz Harvey Licayan _____ Date: _____

PANELIST'S REMARKS

_____

_____

_____

Republic of the Philippines
**CEBU TECHNOLOGICAL UNIVERSITY**
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

**COLLEGE OF TECHNOLOGY AND ENGINEERING**
**Information Technology Department**

# USER ACCEPTANCE TESTING

## iEvaluate - SAO Staff (Data Gatherer) Module UAT - Team ERMM Cebu Technological University, Argao Campus