Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING - ALL ROLES

Role	Cases	Pass	Fail	Not Run
SAO Administrator	18	0	1	17
SAO Staff (Data Gatherer)	21	2	0	19
Department Head	17	0	0	17
Instructor	14	0	0	14
Total	**70**	**2**	**1**	**67**

Revised 2026-11-01 for app build of 2026-10-28. Pass/Fail is read from each Actual Result.

SAO Administrator

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

USER ACCEPTANCE TESTING - SAO ADMINISTRATOR MODULE

```
Revised 2026-11-01 for app build of 2026-10-28 (commit 926b836)
Changes since the 2026-09-20 edition (commit 17a4267):
  - Every case now has a "Revision" line and an "Account Needed" line.
    Cases that change or remove shared records are marked [DESTRUCTIVE].
  - Labels re-checked against the Dart code. The drawer item "Manage
    Departments" is now "Departments", and "Report Signatories" is new.
  - Approve on a placeholder login now opens "Activate account" (TC-A15).
    Reject now deletes the pending account outright (TC-A02).
  - A sign-in with a blank ID or address gets a forced "Complete your
    information" dialog. Its only exits are "Save" and "Log out" (TC-A16).
  - New: colleges on departments and on sign-up (TC-A13), editable report
    signatories (TC-A14), editing another user's login email (TC-A17),
    SAST Guidelines shown once per term (TC-A18).
  - Scores show 2 decimals and a blank is never counted as 0 (TC-A06,
    A08). All n8n calls now go through the [n8n-proxy] edge function.
  - Import-error screens are reached only from the Data Gatherer view, so
    they stay in UAT_SAO_Staff (TC-S08). TC-A01's 31/08/2026 result is
    kept in its Comments as an older-build run.
================================================================================
CEBU TECHNOLOGICAL UNIVERSITY - ARGAO CAMPUS
COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department
USER ACCEPTANCE TESTING - SAO ADMINISTRATOR MODULE
================================================================================
Capstone Project Title : iEvaluate: An AI-Driven Mobile Instructor Evaluation
                         and Performance Analysis System Using N8n Workflow
                         Automation
Team                   : ERMM
Project Leader         : Rodz Harvey Licayan
Front-End Programmer   : Michael Thomas Gonzaga
QA Engineer            : Mark Lawrence Medillo
Technical Writer       : Evangeline Caruana
Role under test        : SAO_ADMIN  ("SAO Administrator")
Device                 : Infinix X6525, Android 13
Active term            : 2nd Semester, 2027-2028
Test account           : the SAO admin account held by the tester.
                         Credentials are deliberately NOT recorded here.
--------------------------------------------------------------------------------
HOW TO READ THIS DOCUMENT
--------------------------------------------------------------------------------
* Text in "double quotes" appears on screen exactly as written. Match it
  character for character. {name}, {email} and similar stand for values.
* Names in [square brackets] are database tables or edge functions to check
  when a step needs back-end verification.
* Each step has its own expected result, so a failed case identifies WHICH
  step failed.
* "Revision" says whether the case is unchanged, updated, removed or new
  in this edition. "Account Needed" lists the sign-ins the case uses.
* "Actual Result" is blank where the case has not been run on this build.
  Results from older builds are kept in Comments, marked "Old run".
!! DESTRUCTIVE-ACTION WARNING !!
  This role can create accounts, change roles, disable users, delete pending
  registrations, switch the active term for the whole system, and change
  what is printed on official reports. Cases marked [LIVE DATA] change real
  records. Cases marked [DESTRUCTIVE] change or remove shared records in a
  way other users will notice. Run both on staging, or on throwaway accounts
  you are willing to lose, and never during a live evaluation period.
```

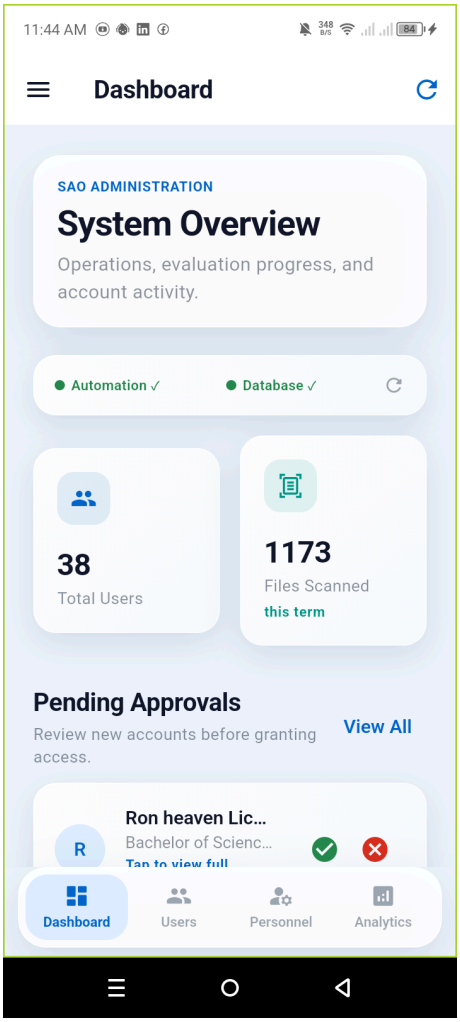
```
--------------------------------------------------------------------------------
SCREEN COVERAGE
--------------------------------------------------------------------------------
  SCREEN                     REACHED BY                        CASE
  -------------------------- --------------------------------- ------------
  Dashboard                  Tab "Dashboard"                   TC-A01, A02
  Activate account dialog    Approve on a placeholder login    TC-A15
  User Management            Tab "Users", Dashboard "View All" TC-A03, A04,
                                                               A17
  Personnel Management       Tab "Personnel"                   TC-A05, A17
  Performance Analysis       Tab "Analytics"                   TC-A06
  Subject Management         Drawer "Subject Management"       TC-A07
  Department Management      Drawer "Departments"              TC-A08, A13
  Report Signatories         Drawer "Report Signatories"       TC-A14
  Live System Metrics        Drawer "Live System Metrics"      TC-A10
  Security Audit Logs        Drawer "Security Audit Logs"      TC-A09
  System Settings            Drawer "System Settings"          TC-A11, A12
  SAST Guidelines            Auto once per term, or Settings   TC-A18
                             "Help" > "SAST Guidelines"
  Complete your information  Any sign-in with ID/address blank TC-A16
  Registration (college)     Login screen "Register"           TC-A13
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A01	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SIGN IN AS SAO ADMINISTRATOR AND READ THE SYSTEM OVERVIEW	
Revision	updated - SAST guide pop-up; health check via n8n-proxy	
Account Needed	SAO_ADMIN	
Preconditions	App on the Login screen. Account is active with role SAO_ADMIN.	
Test Data	View only. Edge function [n8n-proxy] (action "health"). Tables [user_info], [sast_all_raw_data_survey].	
Steps	1. Sign in with the SAO administrator credentials. ***Expected:*** Routes to the admin landing screen titled "Dashboard", NOT any other role's dashboard. Bottom tabs read "Dashboard", "Users", "Personnel", "Analytics".	
	2. If this is the first sign-in on this device for the active term, the "SAST Guidelines" screen opens over the dashboard. Tap "I have read this". ***Expected:*** The guide closes onto the dashboard (detail in TC-A18). If a "Complete your information" dialog appears instead, the admin's own ID or address is blank - see TC-A16.	
	3. Read the header card. ***Expected:*** Shows "SAO ADMINISTRATION", "System Overview" and the subtitle "Operations, evaluation progress, and account activity."	
	4. Read the health strip. ***Expected:*** Shows "Automation ✓" and "Database ✓" in green, plus a refresh control. Automation is now checked through [n8n-proxy], not by calling n8n directly.	
	5. Read the two counters. ***Expected:*** A count labelled "Total Users" and a count labelled "Files Scanned" with "this term" under it. Both are numbers, not blank or "null".	
	6. Cross-check "Total Users" against [user_info]. ***Expected:*** The figure equals the number of rows in [user_info], pending accounts included.	
	7. Cross-check "Files Scanned" against [sast_all_raw_data_survey] for the active term. ***Expected:*** The figure equals the count gathered this term, even above 1000 rows, and changes only when the term changes or new scans arrive.	
	8. Turn off Wi-Fi and mobile data, then tap the health-strip refresh. ***Expected:*** The affected indicator turns red and reads "✗" rather than silently staying green. The app does not crash.	
Expected Result	The admin lands on the System Overview, and both the health indicators and the two counters reflect the real state of the system.	
Actual Result (Pass/Fail)	PARTIAL – Dashboard showed SAO ADMINISTRATION / System Overview, Automation and Database green, 38 Total Users and Files Scanned this term (0 before the term change, 1173 after); offline refresh turned Automation then Database red with no crash.	

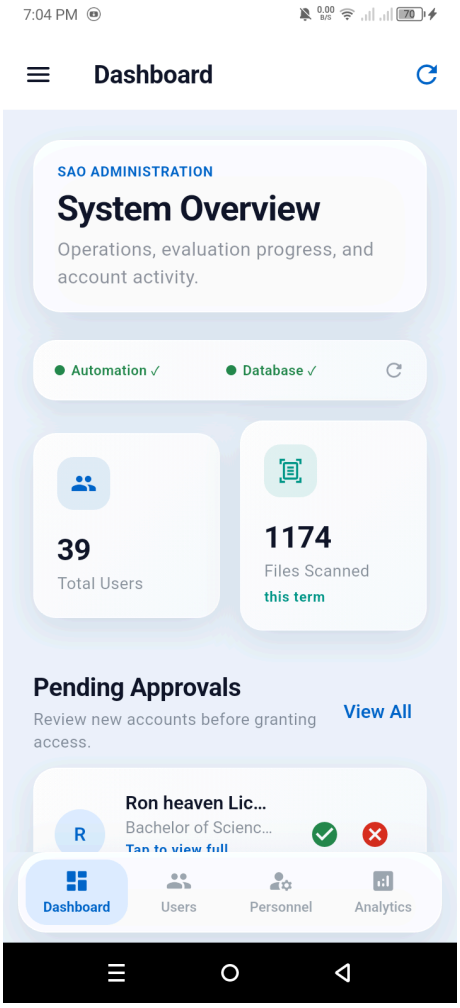
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-5 and 8 run. Steps 6-7 (DB cross-check) not run: no SQL access. Term was changed to 1st Semester 2028-2029 mid- run, so Files Scanned rose 0 to 1173. Guide popup (step 2) appeared on sign-in. Old run (31/08/2026, older build): PASS on steps 1-4. Dashboard rendered with "SAO ADMINISTRATION" / "System Overview" / "Operations, evaluation progress, and account activity.", the health strip showing "Automation" and "Database" both healthy, "17 Total Users" and "152 Files Scanned this term", and the four tabs Dashboard / Users / Personnel / Analytics. Steps 5-7 not executed. (Old step numbers; step 2 did not exist then.)
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A02	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	APPROVE A PENDING ACCOUNT REGISTRATION [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - Reject now deletes; placeholder accounts go to A15	
Account Needed	SAO_ADMIN, plus the two throwaway registrants' sign-ins	
Preconditions	At least two throwaway accounts have registered with a real email and are awaiting approval.	
Test Data	Two throwaway registrations (one to approve, one to reject), each with an inbox the tester controls. Edge function [admin-accept-user]. Tables [user_info], [Sao_users], [department_table], [instructor_departments].	
Steps	1. On the dashboard, find the "Pending Approvals" section. ***Expected:*** Subtitle reads "Review new accounts before granting access." with a "View All" link that opens "User Management". Each pending card reads "Tap to view full details". A card reading "Needs activation • tap for details" is a placeholder login - that path is TC-A15.	
	2. When there are no pending registrations, read the empty state. ***Expected:*** Reads "All caught up" and "There are no accounts waiting for approval." rather than an empty gap or an endless spinner.	
	3. Tap the first throwaway account. ***Expected:*** A sheet marked "Pending Approval" shows "University ID", "Email Address", "Address", "Department", "Employment Status" and "Registered On", with "Reject" and "Approve" buttons. Fields with no value read "Not provided", not blank or "null".	
	4. Confirm the card's second line matches what the person registered as. ***Expected:*** Shows their department for an academic role, or their SAO role for SAO personnel, e.g. "SAO_STAFF". "Pending Verification" appears only when neither is on record.	
	5. Tap "Approve" (or the green check on the card). ***Expected:*** Approved via [admin-accept-user] with "{name} has been approved". The card leaves the list. "Total Users" does NOT change, because it already counted the pending account.	
	6. Have the approved person sign in. ***Expected:*** They land on the dashboard for the role they were approved as, and no other. If their ID or address is blank they get "Complete your information" first (TC-A16).	
	7. On the second throwaway account tap "Reject". ***Expected:*** There is no confirmation dialog. Message reads "{name}'s request was rejected and removed". The account's rows are deleted from [user_info] and the role tables, "Total Users" drops by one, and that person can no longer reach any dashboard.	
	8. Force a failure (approve with no network) and observe. ***Expected:*** Message reads "Action failed. Please try again." and the account is NOT left half-approved: it either stays pending or is fully approved, never both.	
Expected Result	A pending registration can be reviewed in full and approved, after which the person can sign in with exactly the role they were approved for. Reject removes the registration, and a failed approval leaves no partial state.	

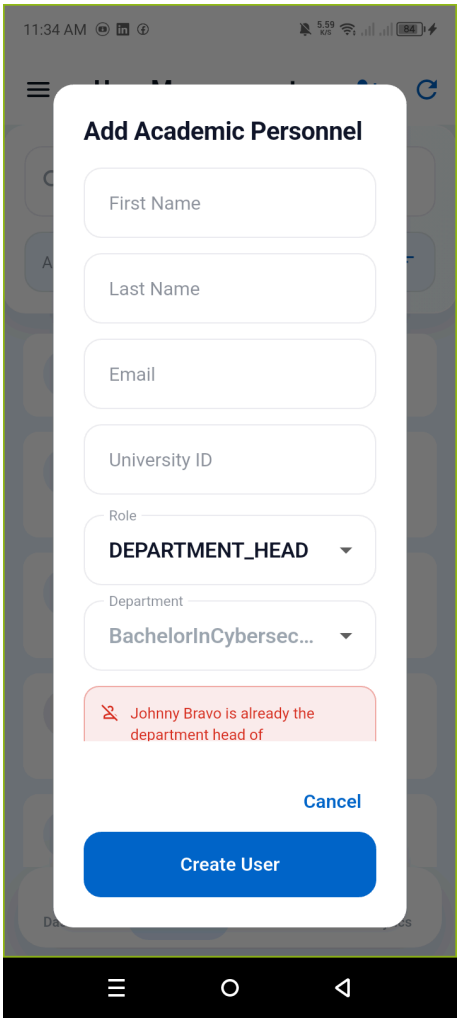
Actual Result (Pass/Fail)	PARTIAL – Pending Approvals listed 2 cards; tapping one opened a Pending Approval sheet with University ID, Email, Address, Department, Employment Status, Registered On and Reject/Approve buttons.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 3 and 4 only (view). Approve and Reject not run: real pending users, changes shared data. Step 7 cannot be undone. Use only a throwaway registration created for this run - never reject a real applicant.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A03	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	CREATE AN ACADEMIC USER, INCLUDING THE DEPARTMENT HEAD AUTHORIZATION CODE [LIVE DATA]	
Revision	updated - exact dialog labels; Cancel locked while saving	
Account Needed	SAO_ADMIN (with access to its email inbox)	
Preconditions	Signed in as SAO admin on the "Users" tab. Access to the admin's email inbox for the verification code.	
Test Data	Two throwaway names, emails and University IDs (one instructor, one department head) and a department with no sitting head. Edge functions [send-admin-code], [admin-create-user]. Keep the instructor for TC-A16/A17.	
Steps	1. Open the "Users" tab. ***Expected:*** Screen titled "User Management" lists academic users. While loading it reads "Loading academic users…"; with none it reads "No academic users found."	
	2. Tap the add-person icon at the top right. ***Expected:*** A dialog "Add Academic Personnel" opens with "First Name", "Last Name", "Email", "University ID", "Role" and "Department", and the buttons "Cancel" and "Create User".	
	3. Submit the form with required fields left empty. ***Expected:*** Refused with "Please fill in all required fields". No account is created.	
	4. Create a plain INSTRUCTOR account with valid details. ***Expected:*** The account is created without asking for a code, with "Personnel created!", and appears in the list.	
	5. Now create an account with the role DEPARTMENT HEAD. ***Expected:*** BEFORE creating anything the app shows "Verification code sent to {admin email}", the title changes to "Verify Authorization", it states "Creating a Department Head requires authorization." and asks "Enter the 6-digit code sent to your email:". The button reads "Verify & Create".	
	6. Enter an INCORRECT 6-digit code. ***Expected:*** Refused. NO Department Head account is created.	
	7. Enter the CORRECT code. ***Expected:*** The Department Head account is created and appears in the list.	
	8. Repeat step 5 but cancel at the code prompt. ***Expected:*** No account is created and no partial record is left behind.	
	9. Force a server failure during creation. ***Expected:*** Message reads "Could not create the user. Please try again." and no partially-created account is left.	
	10. Tap "Create User" and, while the spinner runs, try "Cancel" and the system Back button. ***Expected:*** Both are ignored until the save finishes. The dialog never closes the User Management screen underneath it.	

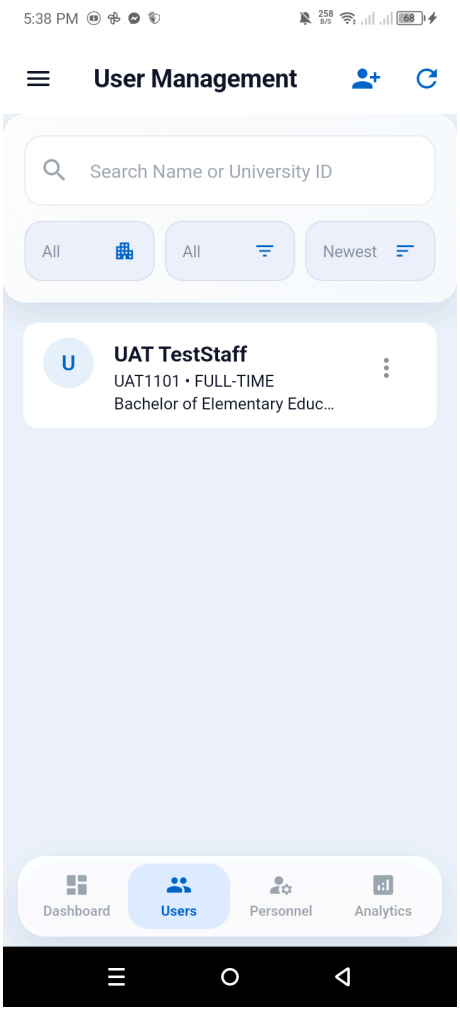
Expected Result	Ordinary instructor accounts can be created directly, while creating a Department Head is gated behind a correct emailed 6-digit code, and every refusal leaves no partial account.
Actual Result (Pass/Fail)	PARTIAL – Users tab listed academic users; the Add Academic Personnel dialog opened and Create User with empty fields showed a red refusal snackbar (partly hidden behind the dialog).
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-3 run. Not run: steps 4-10 need throwaway accounts and the admin inbox. Dialog defaults Role to DEPARTMENT_HEAD with a 'Johnny Bravo is already the department head' warning. This is the most security-relevant case in the module. The privilege escalation guard is the thing being tested, not the form. The success message really reads "Personnel created!" on this screen too.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A04	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	DISABLE AND RE-ENABLE AN ACADEMIC ACCOUNT [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - menu labels; no confirm step exists in this build	
Account Needed	SAO_ADMIN, plus the throwaway academic account's sign-in	
Preconditions	A throwaway academic account exists and can currently sign in.	
Test Data	That account's credentials, held by the tester (the TC-A03 instructor will do). Edge function [admin-accept-user].	
Steps	1. On the "Users" tab, open the throwaway account's ⋮ menu and tap "Disable". ***Expected:*** The change applies at once - this build has NO confirmation dialog. Message reads "Account disabled successfully", the name is struck through, and the menu now offers "Approve".	
	2. Attempt to sign in as that disabled account. ***Expected:*** Sign-in is refused with "This account has been suspended. Please contact the SAO office." The user reaches no screen inside the app.	
	3. Confirm the account's evaluation data still exists. ***Expected:*** Disabling is NOT a deletion. Scores and remarks are retained.	
	4. Re-enable the same account from its ⋮ menu with "Approve". ***Expected:*** Message reads "Account approved successfully" and the name is no longer struck through.	
	5. Sign in as that account again. ***Expected:*** Sign-in now succeeds and lands on the correct role's dashboard.	
Expected Result	An account can be disabled and re-enabled by the admin, a disabled account cannot sign in, and no evaluation data is lost either way.	
Actual Result (Pass/Fail)	NOT RUN – Disable/re-enable was not run.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. The 2026-09-20 edition expected a confirmation before disabling. The code has none: one tap disables. Raise it with the team if a confirmation is required. A placeholder account's menu reads "Activate & Approve" instead (TC-A15).
Tester Name / Date	
Panelist's Remarks	

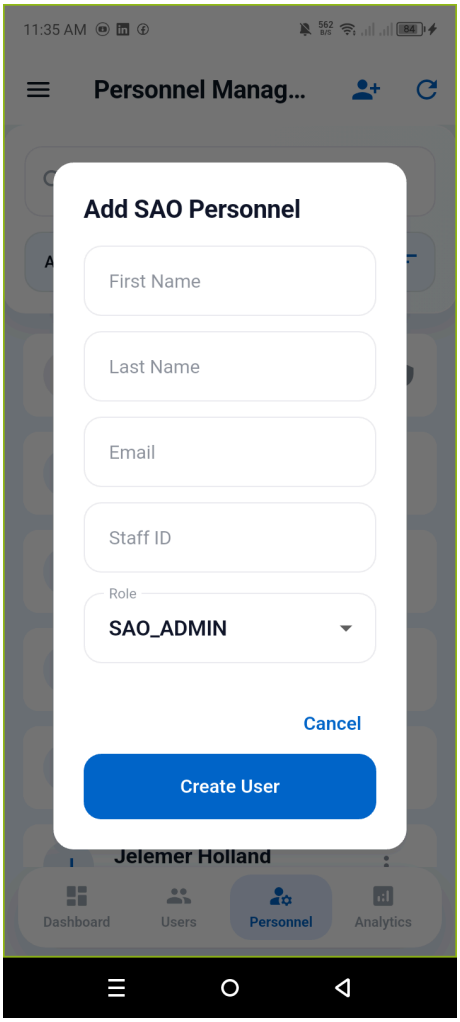
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A05	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	CREATE SAO PERSONNEL, INCLUDING THE ADMIN AUTHORIZATION CODE [LIVE DATA]	
Revision	updated - Staff ID field, role preset, stats in detail sheet	
Account Needed	SAO_ADMIN (with inbox), plus the new SAO_STAFF's sign-in	
Preconditions	Signed in as SAO admin on the "Personnel" tab. Access to the admin's inbox.	
Test Data	Two throwaway names, emails and Staff IDs (one SAO_STAFF, one SAO_ADMIN). Edge functions [send-admin-code], [admin-create-user], [admin-update-role]. Keep the SAO_STAFF account for TC-A17.	

Steps	1. Open the "Personnel" tab. ***Expected:*** Screen titled "Personnel Management". While loading it reads "Loading SAO personnel…"; with none it reads "No SAO personnel" and "Try changing the search or role filter."
	2. Tap one person's row. ***Expected:*** A sheet shows "Account Details" and "Scan Statistics" with "Today", "This Term", "All Time" and "Last Upload" (e.g. "5m ago"), or "No uploads yet" when they never uploaded.
	3. Tap the add-person icon, then submit with every field empty. ***Expected:*** The dialog "Add SAO Personnel" has "First Name", "Last Name", "Email", "Staff ID" and "Role". Submitting refuses with "Please fill in all required fields".
	4. Try to submit without a role. ***Expected:*** Not possible: "Role" is pre-filled with the first SAO role and cannot be cleared. "Please select a role first" appears only if the role list failed to load.
	5. Create an account with role SAO_STAFF. ***Expected:*** Created without a code, with "Personnel created!", and the row appears in the list.
	6. Now create an account with role SAO_ADMIN. ***Expected:*** The app states "Creating an Admin requires authorization." and asks "Enter the 6-digit code sent to your email:". A code arrives by email. The button reads "Verify & Create".
	7. Enter an INCORRECT code. ***Expected:*** Refused. NO admin account is created.
	8. Enter the CORRECT code. ***Expected:*** The admin account is created and appears in the list.
	9. Have the new SAO_STAFF account sign in. ***Expected:*** They land on the Data Gatherer screen with tabs "Dashboard", "Scanner", "Validation", "Sync Queue" - and have NO access to admin screens such as Users, Personnel or System Settings.
	10. Open a person's ⋮ menu, tap "Edit Profile", change the name and tap "Save Changes". ***Expected:*** The dialog is titled "Edit Personnel Profile"; its button reads "Back" until something changes. Saving shows "Personnel updated successfully!" and the change is visible.
	11. Edit the SAO_STAFF account again and set "Role" to SAO_ADMIN. ***Expected:*** The app states "Upgrading a user to Admin requires authorization." and asks for the emailed 6-digit code before anything changes. Cancel here, leaving the role unchanged.
	12. Force a server failure during creation. ***Expected:*** Message reads "Could not create the personnel. Please try again." and no partial account is left.
Expected Result	SAO staff accounts can be created directly, creating or promoting to SAO Administrator is gated behind a correct emailed 6-digit code, and a new staff account is confined to the gatherer screens.
Actual Result (Pass/Fail)	PARTIAL – Personnel tab opened; a row showed Account Details and Scan Statistics (Today / This Term / All Time / No uploads yet); the Add SAO Personnel dialog showed 5 fields with Role pre-filled SAO_ADMIN, and an empty submit showed a red refusal snackbar (partly hidden).

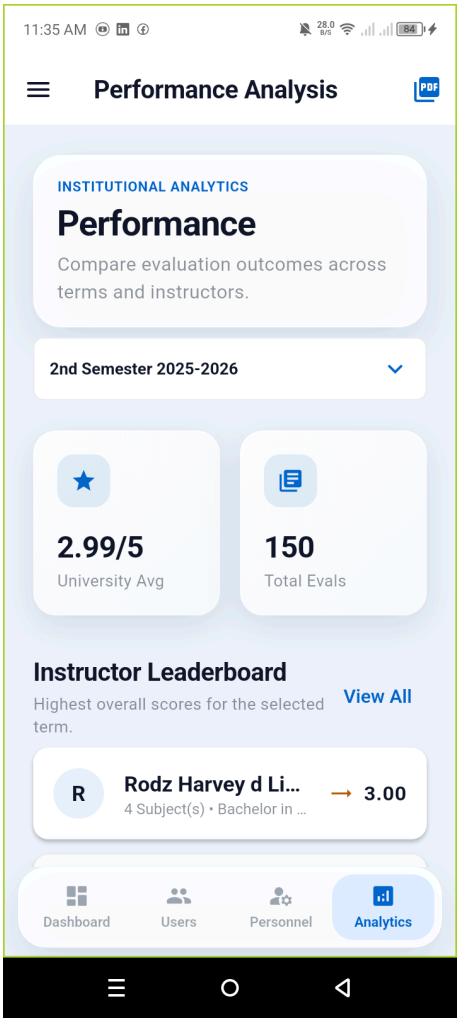
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-4 run. Steps 5-12 not run: need throwaway accounts and the admin inbox. Exact snackbar text not readable behind the dialog. Step 9 is the privilege-boundary check. A staff account that can reach any admin screen is a FAIL for the whole case.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A06	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	ANALYTICS - UNIVERSITY-WIDE PERFORMANCE	
Revision	updated - any-term picker, 2-decimal scores, N/A, PDF error	
Account Needed	SAO_ADMIN	
Preconditions	Signed in as SAO admin with evaluation data in the active term.	
Test Data	View only. At least one instructor WITH results and one assigned instructor with NO answers this term. Table [overall_total_survey] for the stored scores.	
Steps	1. Open the "Analytics" tab. ***Expected:*** Screen titled "Performance Analysis" with "INSTITUTIONAL ANALYTICS", "Performance" and "Compare evaluation outcomes across terms and instructors." While loading it reads "Preparing performance analysis…".	
	2. Read the term dropdown, then pick an older term and back again. ***Expected:*** It starts on the active term, whose label ends in "(Current)". Picking another term reloads the figures for that term, with a spinner in the dropdown while it loads.	
	3. Read "University Avg" and "Total Evals". ***Expected:*** "University Avg" reads like "4.21/5", always 2 decimals. A term with no scored results reads "N/A/5", never "0.00/5".	
	4. Read the "Instructor Leaderboard". ***Expected:*** Subtitle "Highest overall scores for the selected term." Each row shows "{n} Subject(s) • {department}" and a 2-decimal score. With no results it reads "No instructor results".	
	5. Tap "View All" on the leaderboard. ***Expected:*** A sheet "All Instructors ({n})" opens with the search box "Search by name or department...", and search narrows it.	
	6. Compare one instructor's score with [overall_total_survey]. ***Expected:*** Equals the stored combined score rounded to 2 decimals. The instructor with no answers is left out of "University Avg", never averaged in as 0.	
	7. Tap the PDF icon ("Export Report"). ***Expected:*** "Saving PDF to Downloads..." then the PDF. If it cannot be built: "Could not export the PDF. Please try again." and no crash.	
	8. Switch the active term in System Settings, return, and re-read. ***Expected:*** The screen reloads onto the newly active term without a manual refresh.	
Expected Result	Analytics opens on the active term, can show any past term, prints every score to 2 decimals, never counts a blank as 0, and follows a change of the active term automatically.	
Actual Result (Pass/Fail)	PARTIAL – Performance Analysis opened on the active term; older term 2nd Semester 2025-2026 showed 2.99/5 University Avg, 150 Total Evals and a leaderboard with 2-decimal scores; View All opened All Instructors (2) with search; PDF export produced the share sheet.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-5 and 7 run. Step 6 (DB compare) and 8 (term switch) not run. The current term showed N/A/5 before the 2026-11-01 term change; screenshot shows the older term. This screen shows numbers only. Verbal ratings ("Outstanding", "Very Satisfactory" ...) appear in the instructor's Official SAST Report PDF, which is covered by UAT_Instructor_Module, not here.
Tester Name / Date	
Panelist's Remarks	

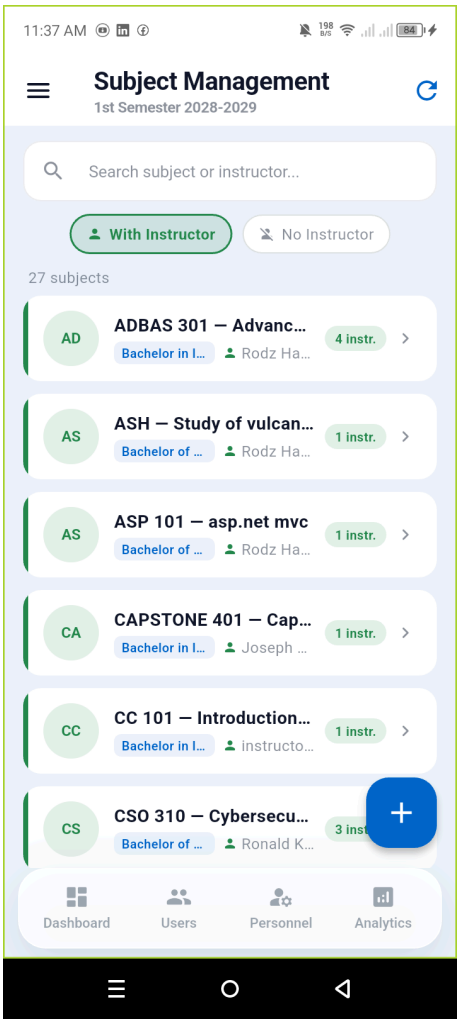
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A07	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SUBJECT MANAGEMENT - BULK IMPORT AND MANUAL ADD [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - import via "Send Bulk" and n8n-proxy; no delete	
Account Needed	SAO_ADMIN	
Preconditions	Drawer item "Subject Management" is reachable. The n8n bulk import workflow is running. A Google Sheet of subject assignments is prepared for the active term.	
Test Data	One prepared sheet, plus one manual subject, two instructors (one with results, one without) and a bad row. The import now goes through the [n8n-proxy] edge function, not a webhook URL in the app.	

Steps	1. Open the drawer and tap "Subject Management". ***Expected:*** Screen titled "Subject Management" with the active term under the title, e.g. "2nd Semester 2027-2028", listing that term's subject assignments.
	2. Use the search box ("Search subject or instructor...") and the chips "With Instructor" / "No Instructor". ***Expected:*** Search narrows the list, and the chips separate subjects that have an instructor from those that do not.
	3. Tap the floating button, then "Add Subject", and add ONE subject with valid details. ***Expected:*** It is created and appears in the list against the active term.
	4. Add a NEW subject reusing the code from step 3, with a DIFFERENT name. ***Expected:*** Refused. A dialog headed "Subject Code Already Used" names the subject holding that code and its department. Reopen the original subject afterwards and confirm its name was NOT rewritten - silently overwriting it is the defect this step exists to catch.
	5. Add a NEW subject with a different code but the SAME name as step 3. ***Expected:*** A dialog headed "Possible Duplicate" names the existing code. "Cancel" creates nothing. Repeat and choose "Create anyway" and it is created - one name under two codes is allowed, but only deliberately. 5a. Open a DIFFERENT subject, tap "Add Instructor", and try to retype the Subject Code to the code used in step 3. The Subject Code is READ-ONLY and cannot be retyped, with one line under it saying it identifies this subject. The header reads "Add Instructor" and names the subject's code; the button reads "Add Instructor", not "Assign Subject". Subject Name and Department ARE editable here, deliberately - see 5b. This sheet used to accept a retyped code, skip every duplicate check, and silently attach the instructor to whatever subject held that code - reporting success, with the subject actually opened receiving nothing. That is BUG-2026-TC-A07. 5b. Still on that sheet, change the Subject Name AND the Department to new values nothing else uses, pick an instructor, and save. Reopen the subject. Both edits are really saved and the instructor is added. No dialog, because neither new value collides. A Department change used to be accepted here, silently ignored on save, and still reported as a success. 5c. Repeat 5b, but type the EXACT name of a different existing subject. "Possible Duplicate" names that other subject. Cancel saves nothing at all - neither the name nor the instructor. 5d. Open a subject that shares its name with another (one created via "Create anyway" in step 5) and add an instructor WITHOUT touching the name. NO "Possible Duplicate" dialog. The warning is only for a name the admin actually changed; nagging about a pre-existing, deliberately allowed collision on every save is a defect in its own right. 5e. Open the EDIT sheet for an existing assignment and check the Subject Code. Read-only there too. Changing a code on this sheet used to repoint the assignment to whatever subject held the new code, silently, reporting "Assignment updated successfully".
	6. Open a subject, tap Remove beside an instructor whose assignment has NO evaluation records. ***Expected:*** "Checking evaluation records..." appears while it checks, then a "Remove Assignment" dialog, then "Assignment removed" and the list refreshes.
	7. Repeat step 6 on an assignment that HAS evaluation records - management results, performance results or student remarks, any ONE of the three is enough. ***Expected:*** A dialog headed "Cannot Remove" states how many records exist. The delete is never attempted and the instructor is still listed afterwards. A case with only performance results or only remarks matters most here: those used to read as zero, so the app promised the removal was safe and the database then refused it.
	8. Open the edit sheet for an existing assignment, clear the instructor field and save. ***Expected:*** Refused, with a message pointing at the Remove button. The sheet must NOT close reporting success while leaving the instructor still assigned.
	9. Tap the floating button, then "Send Bulk". In the "Bulk Import" sheet paste the prepared link into "Google Sheet Link *" and tap "Import via n8n". ***Expected:*** The button reads "Importing..." while it runs, then the sheet closes with "Subjects imported successfully!", or shows "Import failed: {reason}" - never an indefinite spinner. A link that is not a Google Sheet is refused with "Must be a valid Google Sheets URL".
	10. Cross-check the imported rows against the sheet. ***Expected:*** Every row in the sheet is either imported or reported as an error. Nothing is silently dropped.
	11. Deliberately include a bad row (unknown instructor, unknown subject) and re-import. ***Expected:*** The bad row does NOT import silently. It is recorded as an import error and triaged in the SAO Staff module (UAT_SAO_Staff TC-S08), not here.
	12. Run the import with n8n stopped. ***Expected:*** "Import failed: {reason}". No partial import is left behind.

	13. Look for a way to delete a subject that already has evaluation results. ***Expected:*** There is NO delete-subject control. The only removal is the per-instructor Remove of steps 6-7, which is blocked while results exist, so results can never be orphaned.
Expected Result	Subjects can be added manually and in bulk, a subject code can never be given to a second subject, bad rows are reported rather than silently dropped, an instructor can be unassigned only while no evaluation records exist, and a subject carrying results cannot be deleted.
Actual Result (Pass/Fail)	PARTIAL – Subject Management showed the active term (1st Semester 2028-2029) with 27 subjects under With Instructor and 2 under No Instructor; no delete-subject control seen.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 2 and 13 only. Not run: add, remove, bulk import (changes shared data, needs a sheet). Steps 5a-5e were added after BUG-2026-TC-A07: the duplicate guard behind steps 4-5 was gated on WHICH BUTTON opened the form, so the edit and add-instructor sheets skipped it while still letting the code be retyped. The rule now lives in lib/sao_admin/subject_duplicate_check.dart, is keyed to the subject being written rather than the entry point, and is unit-tested in test/sao_admin/. Subject name and department stay editable on every sheet by request, and are now really written from the add-instructor sheet as well; only the code is fixed. Steps 5a-5e are the on-device half of that verification. Steps 4-5 need 20240130000018_one_subject_per_code applied; without it the app still refuses, but only in Dart, so the n8n import can create the duplicate anyway. Steps 7 and 13 need 20240130000015_protect_assignments_with_results. Confirm both are applied before judging any of them. Marked [DESTRUCTIVE] because step 6 deletes an assignment and step 9 writes the sheet into the shared term.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A08	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	DEPARTMENT MANAGEMENT - ADD AND EDIT [LIVE DATA]	
Revision	updated - drawer "Departments"; College field; avg rule	
Account Needed	SAO_ADMIN	
Preconditions	Drawer item "Departments" is reachable.	
Test Data	One throwaway department code and name (keep it for TC-A13). One existing department with at least one instructor who has NO answers this term.	

Steps	1. Open the drawer and tap "Departments". ***Expected:*** Screen titled "Department Management" with "Add or edit departments". While loading it reads "Loading departments…"; with none it reads "No departments yet". A counter reads "All Departments (n)".
	2. Tap the add icon ("Add Department") and submit with fields empty. ***Expected:*** Refused. "Department Name *" and "Department Code *" each show "Required", and a name under 3 letters shows "At least 3 characters". When colleges exist a "College" dropdown is also shown (TC-A13).
	3. Enter a valid code and name, then tap "Add". ***Expected:*** A dialog titled "Confirm Add" reads "Are you sure you want to add "{name}" as a new department?" with "Cancel" and "Yes, Add". Nothing is created until it is confirmed.
	4. Confirm the addition. ***Expected:*** Message reads "Department added successfully" and the new department appears, with the counter increasing by one.
	5. Add a department reusing an existing department NAME, with a new code. ***Expected:*** Refused BEFORE the confirmation dialog appears. An alert headed "Department Already Exists" names the department holding it and says the NAME is what clashed. No row is created.
	6. Add a department reusing an existing department CODE, with a new name. ***Expected:*** Refused the same way, and the alert says the CODE is what clashed. This is the case the old build let straight through - only the name was ever checked, so any existing code was accepted.
	7. Add a department whose name differs from an existing one only by LETTER CASE or by extra spaces, e.g. "college of technology". ***Expected:*** Still refused. Two rows for one department split its faculty and its department average between them, which is the reason for the rule.
	8. Tap the pencil ("Edit") on an existing department, change nothing, and tap "Save". ***Expected:*** Message reads "Department updated successfully". A department must never block itself.
	9. Edit a department and set its name to ANOTHER department's exact name. ***Expected:*** Refused with the same alert. The edit path had no duplicate check at all, so this used to succeed silently.
	10. Tap a department row to view its detail. ***Expected:*** Shows "Department Overview", its "Department Head" (or "No department head assigned"), "Dept. Average", "Total Evals", "Instructors" and the list "Instructors (n)". 10a. Check "Dept. Average" for the department with a no-answer instructor. That instructor is left out of the average, not counted as 0, so the figure equals the mean of the scored instructors.
	11. Look for a way to DELETE a department. ***Expected:*** There is NO delete control. Departments are add/edit only, so an existing department cannot be removed out from under the instructors and results attached to it.
Expected Result	Departments can be added behind an explicit confirmation and edited freely, no name or code can ever be reused on either path, the department average ignores blanks, and no delete path exists.
Actual Result (Pass/Fail)	PARTIAL – Department Management listed All Departments (13); Add Department with empty fields showed Required on name and code and a College dropdown; a department detail sheet showed Dept. Average 3.27, Total Evals 832, Instructors 9 and the head.

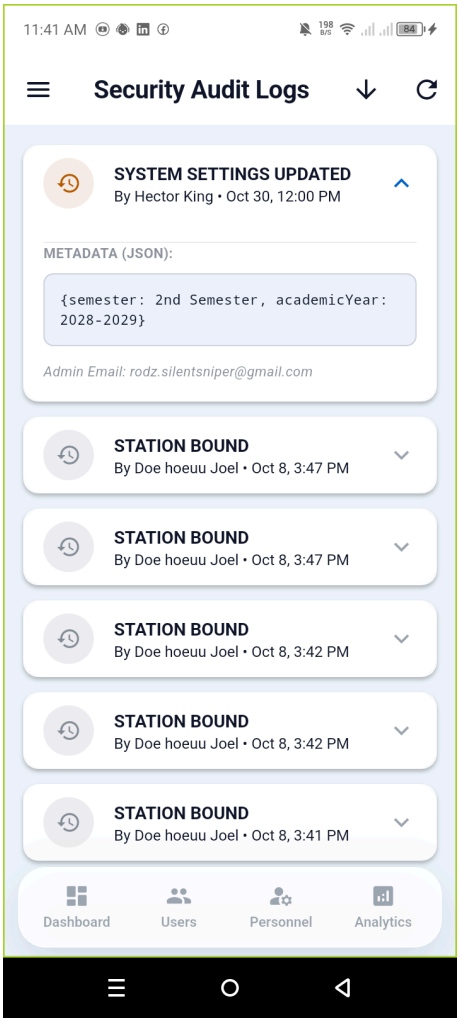
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 2, 10 and 11 run (no delete control). Not run: add/edit steps 3-9 (changes shared data). Step 10a not checked. Steps 5-9 are enforced in the app and, once 20240130000019_one_department_per_name_and_code is applied, in the database too. Without that migration the refusals still appear, but only in Dart, so the REST API and two admins saving at once can still create the duplicate. Step 11 asserts intended behaviour, not a missing feature. If a delete control HAS appeared, that is a regression against the no-delete decision.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A09	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SECURITY AUDIT LOGS	
Revision	unchanged	
Account Needed	SAO_ADMIN	
Preconditions	Some administrative actions have been performed, e.g. the account creation and disabling from TC-A03 and TC-A04.	
Test Data	View only. The actions done in TC-A03, TC-A04 and TC-A15.	
Steps	1. Open the drawer and tap "Security Audit Logs". ***Expected:*** Screen titled "Security Audit Logs". While loading it reads "Loading security history…"; with no entries it reads "No security events" and "Audit activity will appear here as administrative actions occur."	
	2. Confirm the actions from earlier cases are recorded. ***Expected:*** The account creation (TC-A03) and the disable (TC-A04) both appear as entries. An administrative action that leaves NO audit entry is a FAIL.	
	3. Read one entry. ***Expected:*** Shows what happened, who did it ("By {name}") and when, plus the acting admin's email.	
	4. Expand an entry's metadata. ***Expected:*** A "METADATA (JSON):" block shows the detail of the action.	
	5. Toggle the sort control. ***Expected:*** Switches between "Showing Newest First" and "Showing Oldest First", and the list order actually changes to match.	
	6. Confirm no entry can be edited or deleted from the app. ***Expected:*** The log is append-only from the admin's point of view. An audit trail the admin can rewrite is worthless.	
Expected Result	Every administrative action is recorded with actor, action and timestamp, the log can be re-sorted, and it cannot be altered from within the app.	
Actual Result (Pass/Fail)	PARTIAL – Security Audit Logs listed entries with By {name} and date; one entry expanded to a METADATA (JSON) block with the admin email; the sort icon reversed the order.	

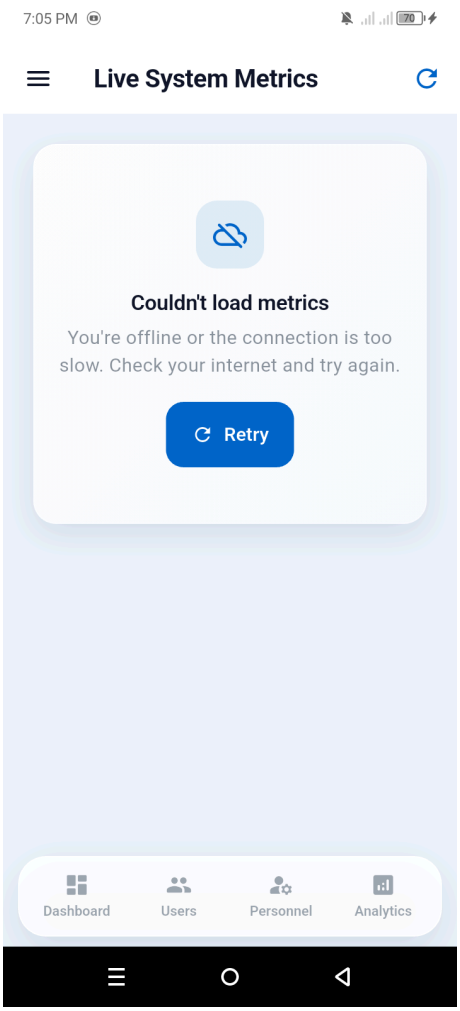
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 3-6 run. Step 2 not checkable: TC-A03/A04 actions were not run. The 'Showing Newest First' label was not seen, only an arrow icon. Step 2 and step 6 are the substance of this case. The rest is presentation.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A10	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	LIVE SYSTEM METRICS	
Revision	updated - exact sections; Manual Review = review queue	
Account Needed	SAO_ADMIN, plus an SAO_STAFF to upload one scan	
Preconditions	Drawer item "Live System Metrics" is reachable.	
Test Data	View only, plus one scan uploaded by SAO staff during the case. Tables [sast_all_raw_data_survey], [failed_scan_queue].	
Steps	1. Open the drawer and tap "Live System Metrics". ***Expected:*** Screen titled "Live System Metrics" with "OPERATIONS", "Live Metrics" and the sections "AI Processing Accuracy", "Data Gatherer Productivity" and "Campus Evaluation Progress".	
	2. Read "AI Processing Accuracy". ***Expected:*** Shows "Auto-Processed", "Manual Review", "Corrected", "AI Accuracy" as a percentage and "Total this term: {n} scans". "Manual Review" equals the pending rows in [failed_scan_queue]; "Corrected" equals the manually corrected scans.	
	3. Compare "Total this term" with the dashboard's "Files Scanned". ***Expected:*** They agree, except that this screen also counts scans saved with no term. Any difference must equal those rows.	
	4. Have SAO staff upload one scan, then return and pull to refresh. ***Expected:*** The scan counts and that staff member's figures under "Data Gatherer Productivity" move by one.	
	5. Disable the network, then open the screen. ***Expected:*** It reports that data is unavailable rather than showing stale figures as if they were live, and does not crash.	
Expected Result	The metrics screen reports current figures that agree with the dashboard, and degrades honestly when offline.	
Actual Result (Pass/Fail)	FAIL – Online the screen showed Auto-Processed 1152, Manual Review 110, Corrected 21, AI Accuracy 89.8%, Total this term 1283. Offline, after about 40 s of skeleton loading it showed 0 / 0 / 0 and 'No scan data yet for this term.' instead of reporting that data is unavailable.	

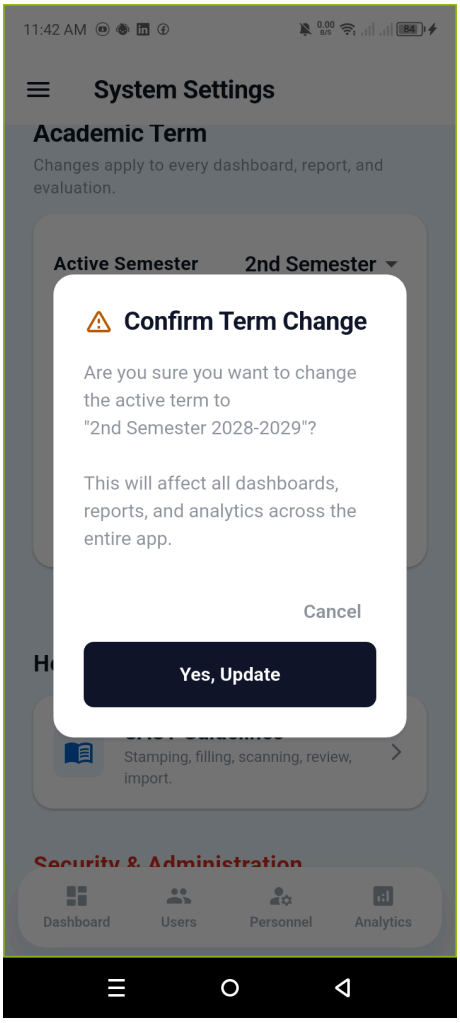
Screenshot	
Comments / Attachments (Screenshots, Logs)	Step 5 failed: expected an honest 'unavailable' message, got zeros that look like real data. Steps 1-3 ok (Total 1283 vs dashboard 1173; the difference 110 equals the Manual Review count, not verified as no-term rows). Step 4 not run: needs a staff upload. The old step 3 used an account approval to move a metric. No metric on this screen counts accounts, so it now uses a scan upload.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A11	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SYSTEM SETTINGS - SWITCH THE ACTIVE ACADEMIC TERM [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - exact labels; notify outage does not block switch	
Account Needed	SAO_ADMIN, plus an INSTRUCTOR signed in on a second device	
Preconditions	Drawer item "System Settings" is reachable. A second device or account signed in as an instructor, to observe the effect.	
Test Data	The original term, written down before starting. Edge function [update-system-settings]. Tables [system_settings], [academic_terms]. !! HIGHEST-IMPACT ACTION IN THE SYSTEM !! Switching the term changes what every dashboard, report and evaluation in the application points at, for every user. Do not run this during a live evaluation period.	
Steps	1. Open "System Settings" and find the "Academic Term" section. ***Expected:*** Shows "Active Semester" and "Academic Year" ("Search or choose below") for the current term, and states that "Changes apply to every dashboard, report, and evaluation."	
	2. Select a different term and tap "Update System Configuration". ***Expected:*** A dialog titled "Confirm Term Change" asks "Are you sure you want to change the active term to "{semester} {year}"?" and warns "This will affect all dashboards, reports, and analytics across the entire app." The term does NOT change yet.	
	3. Tap "Cancel". ***Expected:*** The active term is unchanged everywhere.	
	4. Repeat step 2 and tap "Yes, Update". ***Expected:*** A blocking progress overlay, then "System configuration updated and admins notified." [system_settings] now points at the new term, and the screen shows it.	
	5. Return to the admin Dashboard and Analytics. ***Expected:*** Both now report the newly active term, with figures for that term.	
	6. On the instructor device, WITHOUT restarting the app, observe the instructor's screens. ***Expected:*** Feedback, Past Terms, My Subjects and Subject Detail all reload themselves onto the new term.	
	7. Make [update-system-settings] unavailable, then switch the term. ***Expected:*** The switch still succeeds; only the admin notification is skipped. If the database itself is unreachable instead, a red "Update Error: {reason}" appears and the term is unchanged.	
	8. Switch the term back to the original. ***Expected:*** Succeeds, and every screen returns to reporting the original term.	
Expected Result	The active term changes only after an explicit confirmation, propagates to every role without a restart, and a failure leaves the previous term intact.	

Actual Result (Pass/Fail)	PARTIAL – Academic Term section showed Active Semester / Academic Year; choosing 2nd Semester and tapping Update System Configuration opened Confirm Term Change for 2nd Semester 2028-2029.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-3 run; Cancel tapped, term unchanged by this run. Steps 4-8 not run: changes the active term. The term was changed by the coordinator during the run (now 1st Semester 2028-2029). Step 8 is mandatory. Leave the system on the term it started on. The old step 7 expected the message "Edge Function not found or offline:"; that text is only a debug log, never shown on screen.
Tester Name / Date	
Panelist's Remarks	

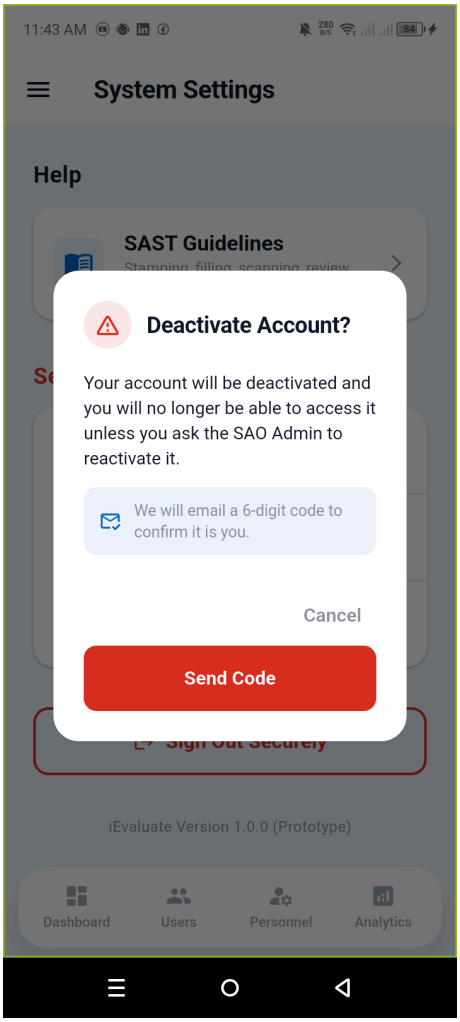
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A12	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	ADMIN'S OWN ACCOUNT SECURITY, INCLUDING ROLE CHANGE VERIFICATION [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - exact dialog labels and new validation messages	
Account Needed	SAO_ADMIN (own, with inbox), plus a SECOND SAO_ADMIN	
Preconditions	Signed in as SAO admin on "System Settings", with access to the admin's inbox.	
Test Data	A new password of at least six characters, NOT recorded in this document. A second email address the tester controls. Edge functions [send-admin-code], [admin-update-role]. !! WARNING !! Steps 6-9 change this admin's own role. Getting it wrong can lock you out of the admin module. Have a second SAO_ADMIN account available first.	

Steps	1. Find "Administrator Profile" and tap "Edit Personal Details". Clear the last name and tap "Save Changes"; then restore it and save. ***Expected:*** A sheet "Edit Admin Profile" opens with "First Name", "Last Name" and "System Role". The blank name is refused with "Please fill in both first and last name."; the real save shows "Profile updated successfully!".
	2. Tap "Edit Email". Submit your current address, then "abc", then a valid new address. ***Expected:*** "This is already your current email address.", then "Please enter a valid email address.", then "Email updated! Check your inbox for confirmation." The old address keeps working until the link is clicked.
	3. Tap "Edit Password" and submit mismatched passwords, then a 5-character one. ***Expected:*** The dialog "Change Password" refuses with "Passwords do not match.", then "Password must be at least 6 characters."
	4. Submit a valid new password with the WRONG current password. ***Expected:*** Refused with "Current password is incorrect." The password does not change.
	5. Submit a fully valid password change. ***Expected:*** "Password updated. Please log in with your new password.", then about 2 seconds later the session ends on the Login screen and needs the new password.
	6. Open "Edit Personal Details", pick the other "System Role" and tap "Save Changes". ***Expected:*** Only "SAO_ADMIN" and "SAO_STAFF" are offered. The sheet turns into "Verify Role Change": "Changing your administrative role requires identity verification." and "Enter the 6-digit code sent to your email:", button "Verify & Update". Submitting an empty code shows "Please enter the verification code."
	7. Enter an INCORRECT code. ***Expected:*** Refused. The role does NOT change.
	8. Enter the CORRECT code and change the role to SAO_STAFF. ***Expected:*** The role changes via [admin-update-role] with "Role updated. Please log in again." and a sign-out. On next sign-in the account lands on the Data Gatherer screens with no access to admin screens.
	9. Using the SECOND admin account, change the first account back to SAO_ADMIN. ***Expected:*** Succeeds, and the first account regains admin access.
	10. Find "Deactivate My Account" and open it, then CANCEL. ***Expected:*** A dialog "Deactivate Account?" reads "Your account will be deactivated and you will no longer be able to access it unless you ask the SAO Admin to reactivate it." with "Cancel" and "Send Code". Cancelling leaves the account fully active.
Expected Result	The admin can maintain their own profile, every password rule is enforced, and changing an administrative role is gated behind a correct emailed 6-digit code.
Actual Result (Pass/Fail)	PARTIAL – Deactivate My Account opened the Deactivate Account? dialog with the expected text and Cancel / Send Code; Cancel left the account active.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Step 10 only. Steps 1-9 not run: they change the admin's own profile, email, password or role. Step 6 is the important one. A role change that succeeds WITHOUT the code is a critical security failure and should be raised immediately. Marked [DESTRUCTIVE] because steps 8-9 demote and restore a real admin account.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A13	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	COLLEGES - DEPARTMENT COLLEGE AND COLLEGE PICKER ON SIGN-UP [LIVE DATA]	
Revision	new	
Account Needed	SAO_ADMIN, plus a signed-out device for the sign-up screen	
Preconditions	Migration 20240130000031_colleges_and_signatories applied, so [colleges] exists and is seeded. The throwaway department from TC-A08 exists.	
Test Data	The TC-A08 throwaway department and two existing colleges. Tables [colleges], [department_name] (column college_id). No registration is submitted in this case.	
Steps	1. Drawer "Departments", tap the pencil ("Edit") on the throwaway department. ***Expected:*** The "Edit Department" dialog shows a "College" dropdown that lists the colleges in [colleges].	
	2. Pick the first college and tap "Save". Reopen the dialog. ***Expected:*** "Department updated successfully". The dialog now shows that college, and [department_name].college_id holds its id.	
	3. On a signed-out device tap "Register" on the Login screen. Choose an academic role in "I am registering as", fill the names and address, and tap "Continue". ***Expected:*** The "Academic Information" step shows "Select College" above "Select Department".	
	4. Try to open "Select Department" before choosing a college. ***Expected:*** It is disabled.	
	5. Fill a valid ID and email, leave the college empty, tap "Continue". ***Expected:*** Refused with "Please select a college".	
	6. Pick the college from step 2 and open "Select Department". ***Expected:*** Only that college's departments are listed, the throwaway department among them. Departments of other colleges, and rows with a blank department code, are not listed.	
	7. Pick a department, then change the college to the second one. ***Expected:*** The department choice is cleared, and the list now shows only the second college's departments.	
	8. Go back and switch "I am registering as" to an SAO role. ***Expected:*** The step is headed "Personnel Details" and shows no college or department picker.	
	9. Leave the sign-up screen WITHOUT tapping "Register". ***Expected:*** No account is created.	
Expected Result	A department can be tied to a college by the admin, and the sign-up screen asks for the college first and offers only that college's departments.	
Actual Result (Pass/Fail)	PARTIAL – Edit Department showed a College dropdown listing the colleges; Register > Academic Information showed Select College above Select Department, Select Department disabled until a college was chosen, and College of Technology and Engineering listed 3 departments.	

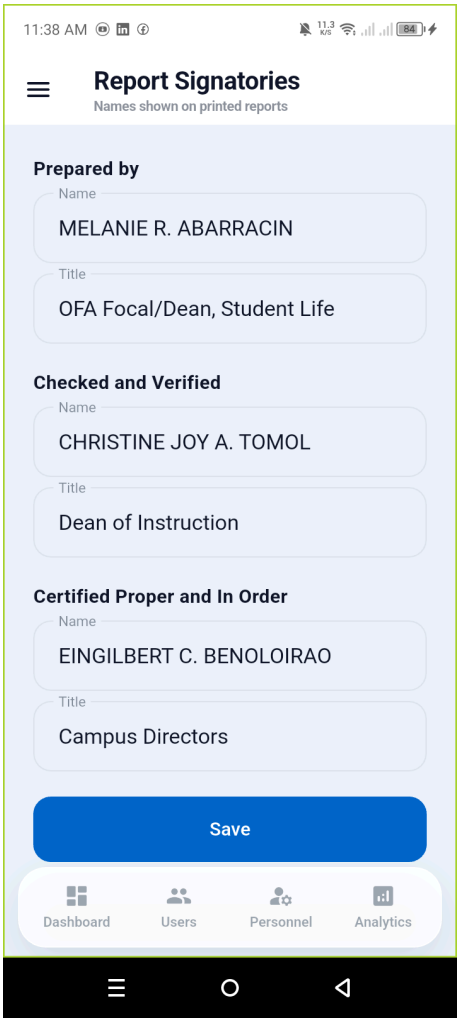
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 3, 4 and 6 run. Step 2 not run (would save a department). Steps 5, 7, 8 not run. No registration submitted. If [colleges] is missing or empty, the "College" dropdown is hidden on both screens and sign-up falls back to the flat department list. Only SAO admins may insert or update colleges (RLS in migration 031); there is no screen to add a new college from the app.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A14	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	REPORT SIGNATORIES - EDIT THE NAMES PRINTED ON REPORTS [LIVE DATA] [DESTRUCTIVE]	
Revision	new	
Account Needed	SAO_ADMIN, plus an INSTRUCTOR with results this term	
Preconditions	Migration 20240130000031_colleges_and_signatories applied. The instructor can open "Official SAST Report".	
Test Data	The six current signatory values, written down before starting. A throwaway name and title, e.g. "UAT PREPARER" / "UAT Title". Table [report_signatories] (row id 1).	
Steps	1. Open the drawer and tap "Report Signatories". ***Expected:*** Screen titled "Report Signatories" with "Names shown on printed reports". While loading it reads "Loading signatories…". Three groups, "Prepared by", "Checked and Verified" and "Certified Proper and In Order", each have a "Name" and a "Title" field.	
	2. Write down all six current values. ***Expected:*** They match [report_signatories] row 1.	
	3. Set the "Prepared by" Name and Title to the throwaway values and tap "Save". ***Expected:*** The button reads "Saving…", then "Signatories saved".	
	4. Leave the screen and reopen it. ***Expected:*** The throwaway values are still there.	
	5. As the instructor, open "Official SAST Report" and tap the download icon. ***Expected:*** The PDF sign-off block reads "Prepared by:" with the throwaway name and title. The other two are unchanged.	
	6. Clear the "Checked and Verified" Name, save, and print again. ***Expected:*** A blank field prints the built-in default ("CHRISTINE JOY A. TOMOL", "Dean of Instruction"), never an empty line.	
	7. Turn off the network and tap "Save". ***Expected:*** "Could not save signatories. Please try again." Nothing changes in the database.	
	8. Restore all six original values and tap "Save". ***Expected:*** "Signatories saved". A fresh report prints the original names.	
Expected Result	The admin can change the three signatories printed on every SAST report, a blank falls back to the default, and a failed save changes nothing.	
Actual Result (Pass/Fail)	PARTIAL – Report Signatories showed Prepared by, Checked and Verified and Certified Proper and In Order, each with Name and Title, plus Save.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-2 only. Steps 3-8 not run: changes names printed on every report. Step 8 is mandatory: these names print on every official report. Only SAO admins may write [report_signatories] (RLS in migration 031); other roles have no drawer entry.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A15	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	ACTIVATE A PLACEHOLDER ACCOUNT (ADMIN SIDE) [LIVE DATA] [DESTRUCTIVE]	
Revision	new	
Account Needed	SAO_ADMIN, plus the activated person's sign-in	
Preconditions	A throwaway pending account with a placeholder login ("placeholder-{id}@ievaluate.internal") exists, e.g. an instructor added during batch scanning on the website. Edge function [admin-activate-account] is deployed.	
Test Data	That placeholder account. A real inbox the tester controls that no account uses yet. The email of an existing account for the duplicate check. Table [user_info].	

Steps	1. On the dashboard, find the placeholder account under "Pending Approvals". ***Expected:*** Its card reads "Needs activation • tap for details" in amber.
	2. Tap the card. ***Expected:*** "Email Address" reads "No real login yet (placeholder)" and the green button reads "Activate", not "Approve".
	3. Tap "Activate" (or the green check on the card). ***Expected:*** A dialog "Activate account" shows the name and role, explains "This account was added without a real login, so it cannot be approved as is. ...", and has the field "Person's real email" with "Cancel" and "Activate & Approve". Nothing is approved yet.
	4. Tap "Cancel". ***Expected:*** Nothing changes. The account is still pending.
	5. Reopen it, type "placeholder-x@ievaluate.internal" and tap "Activate & Approve". ***Expected:*** Refused with "Enter the person's real email address, not the placeholder".
	6. Type the email of an existing account and tap "Activate & Approve". ***Expected:*** Refused with "This email address already belongs to another account. Use a different address." Still pending.
	7. Type the real throwaway inbox and tap "Activate & Approve". ***Expected:*** The title becomes "Account activated" and reads "{name} is approved and their login email is {email}." If they have no password yet it tells them to tap "Forgot Password?". "Done" closes it and the card leaves the list.
	8. Check the throwaway inbox. ***Expected:*** An email says the SAO admin activated the account. If it could not be sent, the dialog showed "The email to {email} could not be sent. Please give them the steps above in person." instead.
	9. Check [user_info] and "Security Audit Logs". ***Expected:*** The row has the real email and status approved, and an "ACCOUNT_ACTIVATED" entry appears in the audit log.
	10. As the person, set a password with "Forgot Password?" and sign in. ***Expected:*** They land on their own dashboard, keep the batches and results tied to the account, and are asked for any blank ID or address by "Complete your information" (TC-A16).
	11. If a second placeholder account exists, open it on the "Users" tab. ***Expected:*** Its ⋮ menu reads "Activate & Approve" and opens the same dialog.
Expected Result	A placeholder login can never be approved as is. The admin must supply a real, unused email, after which the same account is approved, notified and audited.
Actual Result (Pass/Fail)	NOT RUN – Placeholder activation was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a placeholder-login pending account; the two pending cards seen were real users and approving changes shared data. Offline the dialog shows "No internet connection. Please check your WiFi or mobile data." If the function is not deployed it shows "Account activation is not set up on the server yet. Deploy the admin-activate-account function and try again." If another admin activated it first, the message begins "Already activated" and the button reads "Close".
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A16	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	FORCED PROFILE-COMPLETION DIALOG WITH "LOG OUT" [LIVE DATA]	
Revision	new	
Account Needed	Throwaway INSTRUCTOR from TC-A03 (no address), and the account activated in TC-A15 (no University ID)	
Preconditions	Migration 20240130000027_allow_fill_missing_university_id applied. Accounts created from the "Users" tab have no address, so the TC-A03 instructor qualifies.	
Test Data	A street and a barangay for the address. A valid unused University ID, and the University ID of an existing account for the duplicate check. Table [user_info].	
Steps	1. Sign in as the TC-A03 instructor. ***Expected:*** The dashboard appears, then a dialog "Complete your information": "Your profile is missing your address. Please add it to continue. This information is required." It has "House No. / Street / Purok", "Barangay, Municipality, Province", and the buttons "Log out" and "Save". There is no "Later".	
	2. Tap outside the dialog, then press the system Back button. ***Expected:*** The dialog stays open both times.	
	3. Tap "Save" with both fields empty. ***Expected:*** "House number / street is required" and "Barangay is required". Nothing is saved.	
	4. Tap "Log out". ***Expected:*** Back on the Login screen. Nothing is saved.	
	5. Sign in again. ***Expected:*** The dialog appears again.	
	6. Fill both address fields and tap "Save". ***Expected:*** The dialog closes with "Your information has been saved." and [user_info].address is filled.	
	7. Sign out and sign in again. ***Expected:*** No dialog.	
	8. Sign in as the TC-A15 account and enter the existing account's University ID. ***Expected:*** The text names "your University ID" ("your Staff ID" for an SAO account). Saving the taken ID is refused with "This University ID is already registered to another account. Please check the number, or contact the SAO office."	
	9. Enter the unused University ID (and the address if asked) and save. ***Expected:*** Saved, and the dialog does not come back on the next sign-in.	
Expected Result	A user with a blank ID or address cannot use the app until the missing data is saved; the only other way out is "Log out", and nothing partial or duplicate is stored.	
Actual Result (Pass/Fail)	NOT RUN – Profile-completion dialog was not run.	

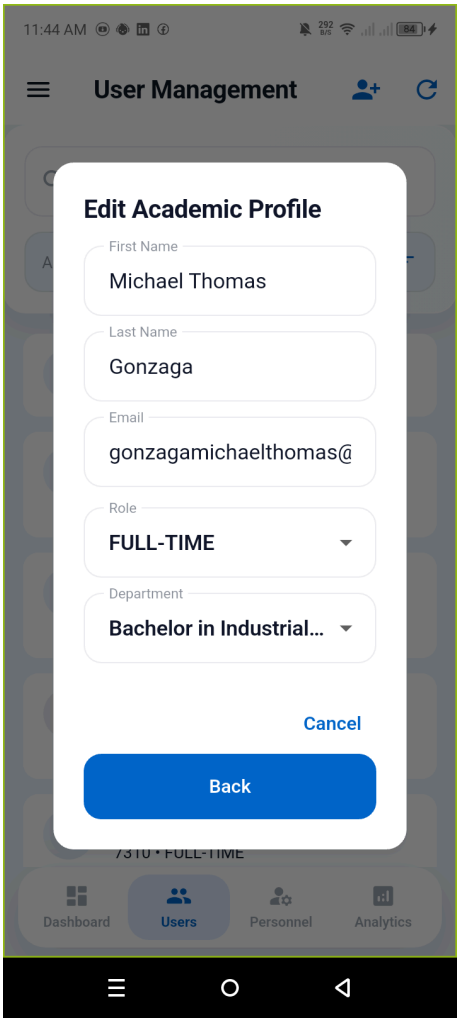
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a throwaway account with blank address or ID. The admin sign-in showed no dialog, so its ID and address are filled. The check runs once per sign-in for every role, SAO admins included. Without migration 027 the ID cannot be saved and the dialog says "Your University ID cannot be set from the app. Please ask the SAO office to add it for you."
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A17	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	CHANGE ANOTHER USER'S LOGIN EMAIL (USERS AND PERSONNEL) [LIVE DATA]	
Revision	new	
Account Needed	SAO_ADMIN, the TC-A03 instructor and the TC-A05 SAO_STAFF	
Preconditions	[admin-update-role] is deployed at a version that accepts an email change.	
Test Data	Two new inboxes the tester controls, the email of an existing account for the duplicate check, and the instructor's University ID.	
Steps	1. On "Users", open the TC-A03 instructor's ⋮ menu and tap "Edit Profile". ***Expected:*** A dialog "Edit Academic Profile" with "First Name", "Last Name", "Email" (pre-filled), "Role" and "Department". The button reads "Back" until something changes.	
	2. Change "Email" to the existing account's address and tap "Save Changes". ***Expected:*** A dialog "Email Already Used": "This email address is already registered to another account." Nothing is saved.	
	3. Change "Email" to "abc" and save. ***Expected:*** Refused with a format message. Nothing is saved.	
	4. Change "Email" to the first new inbox. ***Expected:*** The helper line reads "This becomes their login email." and the button reads "Save Changes".	
	5. Tap "Save Changes". ***Expected:*** "User updated successfully!". If it reads "User updated, but the email was NOT changed. ..." the server function is out of date - record a FAIL.	
	6. Sign in as the instructor with the new email, then with the University ID, then with the old email. ***Expected:*** The first two succeed; the old email is refused with "Incorrect ID or password. Please try again."	
	7. On "Personnel", edit the TC-A05 SAO_STAFF account the same way with the second new inbox. ***Expected:*** "Edit Personnel Profile" has the same "Email" field, and saving shows "Personnel updated successfully!".	
	8. On "Personnel", open "Edit Profile" on your OWN row. ***Expected:*** "Email" is greyed out with "Change your own email from Settings." The admin's own login changes only through TC-A12 step 2.	
Expected Result	An admin can move another user's login to a new, unused email, duplicates and bad formats are refused, and the admin's own email cannot be changed from these screens.	
Actual Result (Pass/Fail)	PARTIAL – Users > menu > Edit Profile opened Edit Academic Profile with First Name, Last Name, Email (pre-filled), Role, Department and buttons Cancel / Back.	

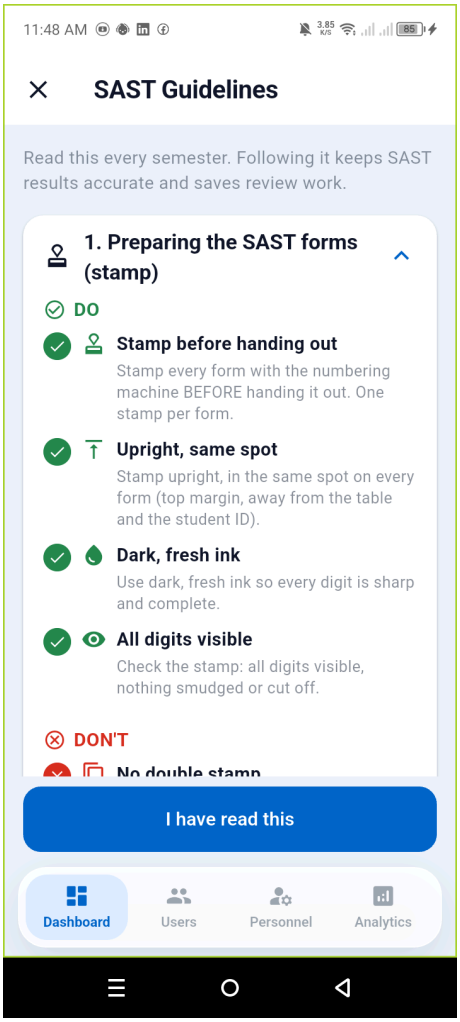
Screenshot	
Comments / Attachments (Screenshots, Logs)	Step 1 only (cancelled). Steps 2-8 not run: change another user's email.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-A18	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SAST GUIDELINES - ONCE-PER-TERM POP-UP AND SETTINGS ENTRY	
Revision	new	
Account Needed	SAO_ADMIN	
Preconditions	An active term is set. The guide has not been acknowledged on this device for this term (fresh install, cleared app data, or a new term).	
Test Data	View only. The acknowledgement is stored on the device per user and term; nothing is written to the database.	
Steps	1. Sign in and wait on the dashboard. ***Expected:*** A full-screen "SAST Guidelines" opens: "Read this every semester. Following it keeps SAST results accurate and saves review work." with sections "1. Preparing the SAST forms (stamp)" through "5. Importing a Google Sheet", the first one expanded, the footer "Questions? Contact the SAO admin." and the button "I have read this".	
	2. Open section 2 and section 5. ***Expected:*** Section 2 says only a check (✓) or slash (/) counts, that X, shading, a circle or a dot are NOT counted, and that a form with fewer than 5 answers is not counted. Section 5 names the tab "SAST Survey Data" and ratings 1 to 5.	
	3. Tap "I have read this". ***Expected:*** The guide closes onto the dashboard.	
	4. Sign out and sign in again. ***Expected:*** The guide does not appear again this term on this device.	
	5. Open "System Settings", section "Help", and tap "SAST Guidelines" ("Stamping, filling, scanning, review, import."). ***Expected:*** The same guide opens WITHOUT the "I have read this" button, and Back returns to Settings.	
	6. After a term switch (TC-A11), open the dashboard again. ***Expected:*** The guide shows once more, once, for the new term.	
Expected Result	The guide appears by itself once per term, can be reopened from Settings at any time, and its rules match what the scanner and the import enforce.	
Actual Result (Pass/Fail)	PARTIAL – SAST Guidelines opened automatically after sign-in with the first section expanded and the 'I have read this' button; sections 2 and 5 text matched; from Settings > Help it opened with a back arrow and no button. After the term change it showed again on the next sign-in.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1, 2, 3, 5 and 6 run. Step 4 (same-term re-sign-in) not run. Step 6 was observed because the term changed mid-run. If the active term cannot be loaded (offline) the guide simply does not auto-show; that is intended.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SUMMARY

```
Total cases     : 18  (unchanged 1, updated 11, removed 0, new 6)
Executed        : 0 on this build
Older build     : TC-A01 steps 1-4 passed 31/08/2026 (see its Comments)
Not executed    : 18

Cases that change live data : TC-A02, A03, A04, A05, A07, A08, A11, A12,
                              A13, A14, A15, A16, A17
Destructive on shared DB    : TC-A02 (reject deletes a registration)
                              TC-A04 (disables an account)
                              TC-A07 (removes assignments, bulk import)
                              TC-A11 (system-wide term switch)
                              TC-A12 (own role change)
                              TC-A14 (names printed on every report)
                              TC-A15 (approves a pending account)
Highest-risk cases          : TC-A11 (system-wide term switch)
                              TC-A12 (own role change)

SECURITY GUARDS THIS DOCUMENT EXISTS TO VERIFY
  1. Creating a Department Head requires an emailed 6-digit code  (TC-A03)
  2. Creating an SAO Administrator requires an emailed code       (TC-A05)
  3. Changing an administrative role requires an emailed code     (TC-A12)
  4. A new SAO_STAFF account cannot reach any admin screen        (TC-A05/9)
  5. Every administrative action lands in the audit log           (TC-A09/2)
  6. Departments cannot be deleted                               (TC-A08/11)
  7. Subjects with results cannot be deleted or unassigned  (TC-A07/7, 13)
  8. A placeholder login cannot be approved without a real email (TC-A15)
  9. The profile dialog closes only on "Save" or "Log out"        (TC-A16)
 10. An admin cannot change their own login email from Users or
     Personnel                                                   (TC-A17/8)
If any one of these fails, record it as a defect before anything cosmetic.
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SIGN-OFF

Tester : _____ Date: _____

QA Engineer : Mark Lawrence Medillo _____ Date: _____

Project Leader : Rodz Harvey Licayan _____ Date: _____

PANELIST'S REMARKS

_____

_____

_____

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

iEvaluate - SAO Administrator Module UAT - Team ERMM Cebu Technological University, Argao Campus

SAO Staff (Data Gatherer)

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

USER ACCEPTANCE TESTING - SAO STAFF (DATA GATHERER) MODULE

```
Revised 2026-11-01 for app build of 2026-10-28 (commit 926b836)
  - All 9 cases updated to the current labels and behaviour; old run moved
    to Comments. 12 new cases added (TC-S10 to TC-S21). Total 21.
  - Validation tab rebuilt: "Failed Scans" and "Import Errors" sections with
    filter chips and "Select Multiple". The old "Edit Record" / "Approve &
    Sync" editor is gone; the drawer no longer has "Import Errors".
  - New: forced profile-completion dialog ("Log out" instead of "Later"),
    "SAST Guidelines" screen, Google Sheet import job with final counts,
    instructor/subject pickers on corrections (422 "Not saved"), stamp
    number card (409 duplicate), scan auto-discards (duplicate stamp, fewer
    than 5 answers), not-a-SAST-form rejection, OMR vs Gemini cross-check.
  - Sync Queue now keeps uploaded scans (status SUCCESS) across restarts
    until the active term changes; removing a scan deletes its image.
  - Every case now has Revision and Account Needed lines; cases that alter
    shared data are marked [DESTRUCTIVE].
================================================================================
CEBU TECHNOLOGICAL UNIVERSITY - ARGAO CAMPUS
COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department
USER ACCEPTANCE TESTING - SAO STAFF (DATA GATHERER) MODULE
================================================================================
Capstone Project Title : iEvaluate: An AI-Driven Mobile Instructor Evaluation
                         and Performance Analysis System Using N8n Workflow
                         Automation
Team                   : ERMM
Project Leader         : Rodz Harvey Licayan
Front-End Programmer   : Michael Thomas Gonzaga
QA Engineer            : Mark Lawrence Medillo
Technical Writer       : Evangeline Caruana
Role under test        : SAO_STAFF  ("SAO Staff (Data Gatherer)")
Device                 : Infinix X6525, Android 13
Active term            : 2nd Semester, 2027-2028
App build              : 2026-10-28, branch main, commit 926b836
Test account           : the SAO staff account held by the tester.
                         Credentials are deliberately NOT recorded here.
WHAT THIS ROLE DOES
  The SAO Staff member is the person who physically scans completed paper SAST
  evaluation forms into the system. Their work is a pipeline:
      scan a form  ->  it queues locally  ->  it uploads to n8n  ->
      anything n8n cannot read is flagged  ->  staff corrects it  ->  it syncs
  This document tests that pipeline, because that is where the role's real work
  and its real risk of data loss sit. Everything else is secondary.
--------------------------------------------------------------------------------
HOW TO READ THIS DOCUMENT
--------------------------------------------------------------------------------
* Text in "double quotes" appears on screen exactly as written.
* Names in [square brackets] are database tables, edge functions or n8n
  webhooks to check when a step needs back-end verification.
* Each step has its own expected result.
* "Actual Result" is blank where the case has not been run on this build.
* "Revision" says how the case changed for the 2026-10-28 build.
* "Account Needed" names the role of the account the tester signs in with.
* [DESTRUCTIVE] marks a case that changes or removes shared data (discards,
  deletes, term change). Run it only on records made for testing, and agree
  it with the team first.
* All n8n calls now go through the Supabase [n8n-proxy] edge function.
!! DATA-LOSS WARNING !!
```

A scanned form represents a real student's evaluation that exists on paper only once. Cases marked [LIVE DATA] upload or discard real records. The single most important property in this whole module is that A SCAN IS NEVER SILENTLY LOST. Several cases below exist only to prove that.

SCREEN COVERAGE

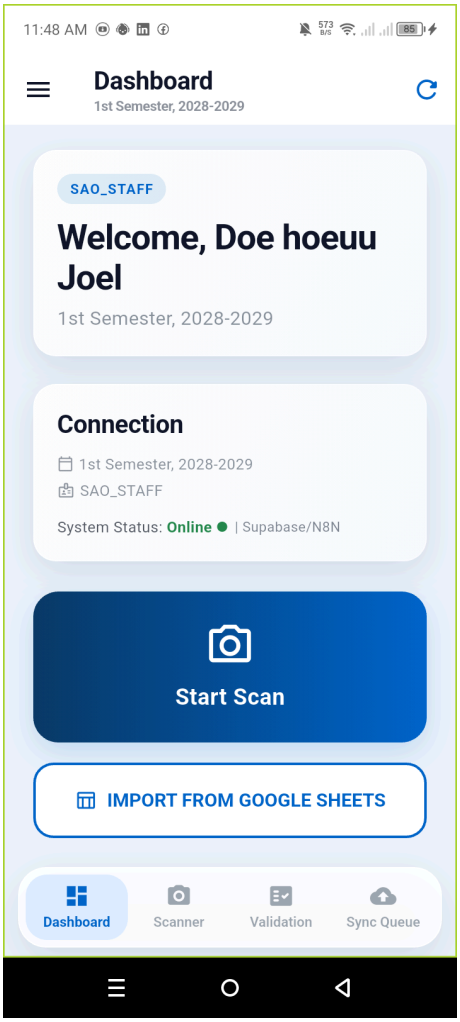
SCREEN	REACHED BY	CASE
Login / Registration	App start, "Register"	TC-S01, TC-S21
Complete your information	Pops up after sign-in when ID or address is missing	TC-S10
SAST Guidelines	Auto once per term; Settings "Help"	TC-S11
Dashboard	Tab "Dashboard"	TC-S01
Scanner	Tab "Scanner"	TC-S02, TC-S03, TC-S15, TC-S16, TC-S17
Sync Queue	Tab "Sync Queue"	TC-S04, TC-S05, TC-S19, TC-S20
Validation	Tab "Validation" (sections "Failed Scans" and "Import Errors")	TC-S06, TC-S07, TC-S20
Fix Import Error	Validation -> "Import Errors" item	TC-S06
Correct Failed Scan	Validation -> "Failed Scans" item	TC-S07, TC-S13, TC-S14, TC-S18
Google Sheets Import	Dashboard "IMPORT FROM GOOGLE SHEETS" / drawer "Google Sheet / Form Import"	TC-S08, TC-S12
Settings	Drawer "Settings"	TC-S09

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S01	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SIGN IN AS SAO STAFF AND READ THE SHIFT DASHBOARD	
Revision	updated - dashboard layout, OVERALL SURVEYS label, SUCCESS kept	
Account Needed	SAO_STAFF	
Preconditions	App on the Login screen. Account is active with role SAO_STAFF, with Staff ID and address already filled in (else TC-S10 runs first).	
Test Data	View only. The SAO admin dashboard's "Files Scanned" figure for the active term, for the cross-check in step 5.	
Steps	1. Sign in with the SAO staff credentials. ***Expected:*** Routes to the gatherer screen. The app bar reads "Dashboard" with the term below it, and the bottom bar has the tabs "Dashboard", "Scanner", "Validation" and "Sync Queue". On the first sign-in of a term the "SAST Guidelines" screen opens first (see TC-S11).	
	2. Confirm the role boundary, including the drawer. ***Expected:*** The drawer holds only "Google Sheet / Form Import", "Settings" and "Log Out". There is NO route to any SAO Admin screen - no Users, no Personnel, no System Settings, no Security Audit Logs. A staff account that can reach an admin screen is a FAIL.	
	3. Read the welcome card and the "Connection" card. ***Expected:*** A role chip "SAO_STAFF", "Welcome, <your name>" and the active term set by the SAO admin. "Connection" shows the term, the role and "System Status: Online | Supabase/N8N" (or "Offline" in red). Tapping the status line checks it again.	
	4. Read the "Shift Activity" section. ***Expected:*** Subtitle reads "Live database and local queue totals." with four counters: "ENTRIES TODAY / submitted today", "PENDING / not yet synced", "SUCCESS / synced this session" and "OVERALL SURVEYS / gathered this term". Above them are "Start Scan" and "IMPORT FROM GOOGLE SHEETS".	
	5. Confirm each counter means what its label says. ***Expected:*** ENTRIES TODAY is the rows saved today in [sast_all_raw_data_survey] plus this phone's scans not yet uploaded; PENDING counts pending or failed scans in the local queue; SUCCESS counts uploaded scans still listed in the Sync Queue; OVERALL SURVEYS matches the "Files Scanned" figure on the SAO admin dashboard for the same term.	
	6. Scan one form (see TC-S02), then return to the dashboard. Tap the refresh icon in the app bar. ***Expected:*** PENDING and ENTRIES TODAY increase by one. After a successful sync, PENDING falls and SUCCESS rises. Refresh shows "Dashboard refreshed".	
Expected Result	The staff member lands on their own dashboard with no admin access, and the four shift counters track the real state of the local queue and the database.	
Actual Result (Pass/Fail)	PARTIAL – Staff signed in to Dashboard with 1st Semester, 2028-2029, tabs Dashboard / Scanner / Validation / Sync Queue; drawer held only Google Sheet / Form Import, Settings, Log Out; Shift Activity showed 0 ENTRIES TODAY, 0 PENDING, 12 SUCCESS, 1173 OVERALL SURVEYS.	

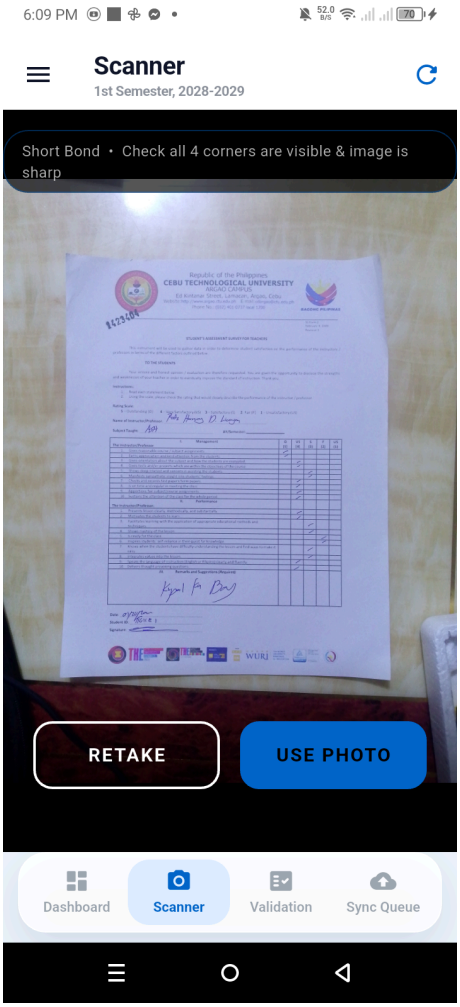
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-5 run; OVERALL SURVEYS 1173 matched admin Files Scanned 1173. Step 6 not run (needs a scan). SUCCESS (12) survived an app restart. Old run (31/08/2026, older build): PASS on steps 1, 3 and 4. Dashboard showed the term "2nd Semester, 2027-2028", "Shift Activity" with "Live database and local queue totals.", the counters "0 ENTRIES TODAY / submitted today", "0 PENDING / not yet synced", "0 SUCCESS / synced this session" and "152 ... gathered this term", plus the "IMPORT FROM GOOGLE SHEETS" button and the four tabs. The term count of 152 MATCHED the "152 Files Scanned" on the SAO admin dashboard. Steps 2 and 6 not executed. Note for this build: SUCCESS is labelled "synced this session" but now survives app restarts until the term changes (see TC-S19). Record which meaning you observe.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S02	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SCAN A COMPLETED FORM - HAPPY PATH [LIVE DATA]	
Revision	updated - new guidance texts, A4 size, preview and snackbars	
Account Needed	SAO_STAFF	
Preconditions	On the "Scanner" tab. Camera permission granted. One completed paper SAST form. Good lighting and a plain background.	
Test Data	One real completed, stamped form whose stamp number has NOT been scanned this term. Note its stamp number, Student ID and instructor before scanning, so the result can be checked.	
Steps	1. Open the "Scanner" tab for the first time. ***Expected:*** The app requests camera permission. Granting it starts the preview; refusing it shows "Camera unavailable. Check that camera permission is granted ..." with a "Try again" button, not a black screen.	
	2. Read the on-screen guidance. ***Expected:*** A status pill reads "FIT SHORT BOND PAPER INSIDE THE FRAME" (the size matches the selected paper) over the guide frame.	
	3. Open the paper-size menu in the top bar and pick the size of the form. ***Expected:*** "Short Bond" (8.5 x 11"), "A4" (210 x 297 mm) and "Long Bond" (8.5 x 13") are listed; the chosen one is ticked, and the frame and the pill update to it.	
	4. Hold the device in landscape. ***Expected:*** The scanner stays upright. If the device ignores the portrait lock, it shows "PLEASE HOLD PORTRAIT" and "The scanner works best in upright mode" and no capture button.	
	5. Align the form in the frame and hold still. ***Expected:*** The pill keeps the "FIT ... PAPER INSIDE THE FRAME" guidance.	
	6. Tap the capture button. ***Expected:*** The pill shows "FOCUSING..." then "HOLD STEADY..." while the photo is taken; the preview then opens and shows "ANALYZING SHARPNESS..." followed by "Short Bond • Check all 4 corners are visible & image is sharp" (with the chosen size).	
	7. Accept the capture with "USE PHOTO". ***Expected:*** Snackbar "Captured! Syncing in background..." and the camera returns. The scan is in the Sync Queue and the dashboard "PENDING" counter rose by one until the upload finishes.	
	8. Confirm the scan is queued BEFORE any upload. ***Expected:*** With mobile data and Wi-Fi off, a capture still lands in the Sync Queue. It is not lost if the app is closed before syncing.	
Expected Result	A well-presented form can be captured with clear guidance throughout, and the accepted scan is stored locally before any upload is attempted.	

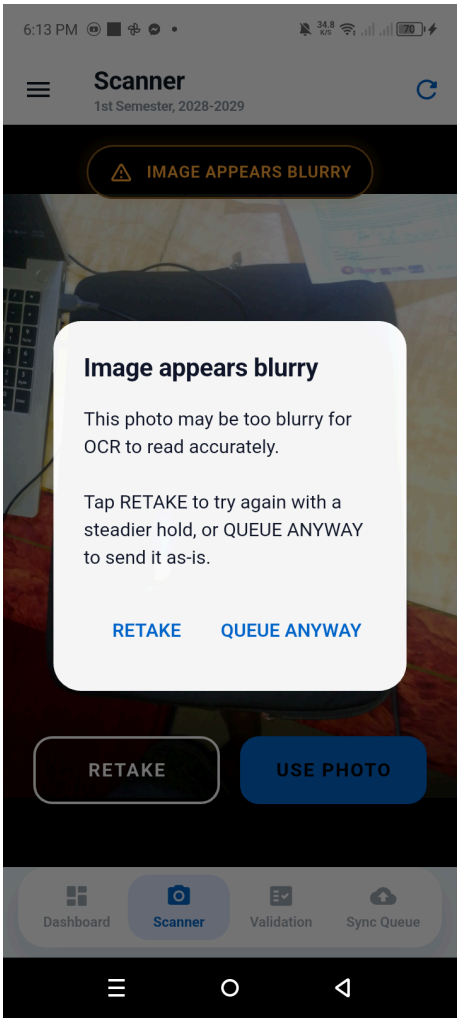
Actual Result (Pass/Fail)	PASS – Short Bond form captured in good light; preview showed RETAKE / USE PHOTO; after USE PHOTO the scan was queued (counter 12→13) and uploaded; Sync Queue showed SUCCESS (SCAN-1793527757536). Server routed it to Import Errors (instructor_not_found) because the AI read the handwritten name as 'Padz Hanney D. Licayan' and 6 instructors share the surname, so it was held for staff instead of guessed (correct human-in-the-loop). NOT RUN – Scanning a form was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a paper SAST form. Step 8 is the data-safety guarantee. If a captured scan can vanish because the network was down, that is the most serious defect this module can have. The old guidance lines "Leave a gap between paper and frame edges", "Hold steady - Plain background - Good lighting" and "TAP TO CAPTURE" no longer exist. If the active term has not loaded yet the snackbar reads "Captured! Held until the active term loads." and the scan waits as pending.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S03	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SCANNER REJECTS POOR CAPTURES [NEGATIVE CASE]	
Revision	updated - blur/dark dialogs, RETAKE / QUEUE ANYWAY, camera texts	
Account Needed	SAO_STAFF	
Preconditions	On the "Scanner" tab with a paper form.	
Test Data	One form, deliberately mis-presented.	
Steps	1. Deliberately move the device while capturing, or capture out of focus. ***Expected:*** The preview shows "IMAGE APPEARS BLURRY" rather than accepting an unreadable scan silently.	
	2. Tap "USE PHOTO" on the blurry capture. ***Expected:*** Dialog "Image appears blurry" offers "RETAKE" and "QUEUE ANYWAY". "RETAKE" returns to the camera and nothing is queued. A blurry image is never queued without this choice.	
	3. Tilt the device more than about 30 degrees while aiming. ***Expected:*** The pill shows the angle, e.g. "TILT: 35° — HOLD STRAIGHT", and the capture button does nothing until the phone is level.	
	4. Present the form far too small in the frame, or overlapping the frame edges. ***Expected:*** The "FIT ... PAPER INSIDE THE FRAME" guidance stays visible, and the preview reminds "Check all 4 corners are visible & image is sharp" so a badly framed capture can be retaken.	
	5. Cover the camera completely, capture, then tap "USE PHOTO". ***Expected:*** The preview shows "IMAGE TOO DARK OR OCCLUDED" and a dialog "Image Too Dark or Occluded" offers "RETAKE" or "QUEUE ANYWAY". Nothing is queued unless "QUEUE ANYWAY" is chosen.	
	6. Revoke camera permission in Android settings, then reopen the Scanner tab. ***Expected:*** "Camera unavailable. Check that camera permission is granted (Settings → Apps → iEvaluate → Permissions → Camera) and that no other app is using it, then tap Try again." with a "Try again" button. The app does not crash.	
	7. Trigger a camera fault, e.g. open another camera app simultaneously. ***Expected:*** The failure is reported (the message above, or the snackbar "Capture failed. Try again, or check that no other app is using the camera."), not swallowed silently.	
Expected Result	Every unusable capture is refused or clearly warned about before it enters the queue, and camera faults are reported rather than hidden.	
Actual Result (Pass/Fail)	PARTIAL – Blur banner and dialog shown (this run): 'IMAGE APPEARS BLURRY', and on USE PHOTO the dialog 'Image appears blurry … RETAKE / QUEUE ANYWAY'. Covered-camera step passed in the earlier run. Tilt, too-small, permission and camera-fault steps not run. PARTIAL – With the lens covered, capture showed IMAGE TOO DARK OR OCCLUDED; USE PHOTO opened the dialog Image Too Dark or Occluded with RETAKE / QUEUE ANYWAY; RETAKE returned to the camera and nothing was queued.	

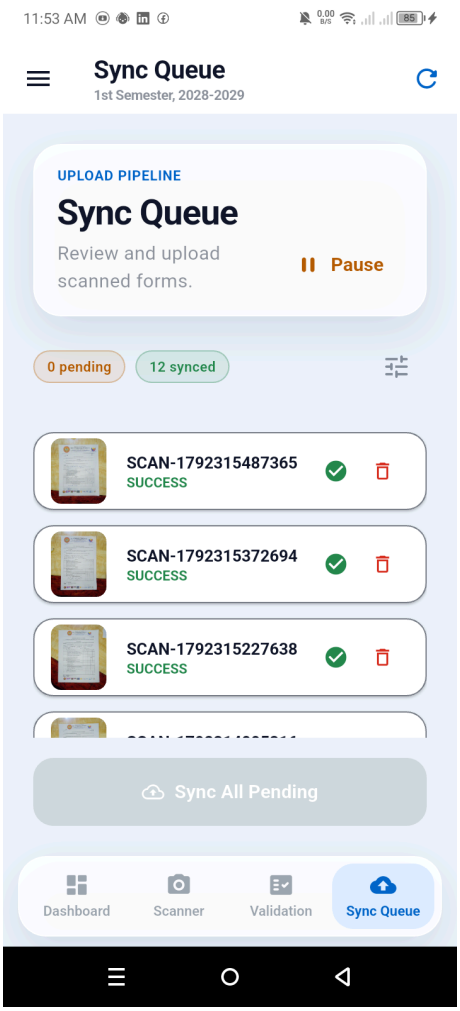
Screenshot	
Comments / Attachments (Screenshots, Logs)	Step 5 only. Steps 1-4, 6, 7 not run: need a form or camera permission changes. The purpose of this case is that GARBAGE NEVER ENTERS THE PIPELINE. A blurry scan that uploads becomes a failed scan someone has to chase later. Photos that are not SAST forms at all are rejected by the server instead - see TC-S17.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S04	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SYNC QUEUE - UPLOAD PENDING SCANS [LIVE DATA]	
Revision	updated - synced scans stay listed; duplicate is auto-discarded	
Account Needed	SAO_STAFF	
Preconditions	At least two scans are queued locally from TC-S02 (pause syncing first so they stay pending). Network available. The n8n workflow is running.	
Test Data	The queued scans. One form already scanned this term, for step 8.	
Steps	1. Open the "Sync Queue" tab. ***Expected:*** Header "Upload Pipeline", "Sync Queue", "Review and upload scanned forms." Each queued scan is listed with a thumbnail, its id (SCAN-...) and its status, plus chips "N pending" and "N synced".	
	2. With nothing queued (fresh term or after removing all), read the empty state. ***Expected:*** Reads "Everything is synced" and "New scans will appear here before upload."	
	3. Confirm the queue count matches the dashboard. ***Expected:*** The "pending" chip equals the dashboard "PENDING" counter.	
	4. Tap "Resume" (if paused), then "Sync All Pending". ***Expected:*** The button shows "Syncing..." with a spinner and each row shows a spinner while it uploads. It does not hang indefinitely with no feedback.	
	5. Wait for the upload to finish. ***Expected:*** Each uploaded scan stays in the list as "SUCCESS" with a green tick. The dashboard "PENDING" falls and "SUCCESS" rises by the number uploaded.	
	6. Verify the uploaded data landed in the database for the correct term and instructor. ***Expected:*** Each scan's scores are recorded against the right instructor, subject and term - the ones printed on the paper form - or the scan appears under Validation -> "Failed Scans" for review.	
	7. With every row already SUCCESS, look at the sync button. ***Expected:*** "Sync All Pending" is greyed out. No duplicate records can be created by tapping it again.	
	8. Scan the SAME physical form a second time and let it sync. ***Expected:*** Snackbar "Already scanned (stamp N): this form is not counted again." and the row reads "ALREADY SCANNED" in orange. The term total does not rise. See TC-S15 for detail.	
Expected Result	Queued scans upload with visible progress, are marked SUCCESS only on success, land against the correct instructor and term, and duplicates are not counted.	
Actual Result (Pass/Fail)	PARTIAL – Sync Queue showed Upload Pipeline, 0 pending, 12 synced and SCAN-... rows marked SUCCESS with Remove from queue; pending 0 matched the dashboard PENDING 0.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1 and 3 only. Not run: syncing needs queued scans, and removal changes data. Step 8 matters most for score integrity. It relies on the numbering-machine stamp: a form with no readable stamp cannot be caught this way and goes to review instead.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S05	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SYNC QUEUE - FAILURES, PAUSE AND REMOVAL [NEGATIVE, LIVE DATA]	
Revision	updated - failure texts, Pause/Resume, delete dialogs	
Account Needed	SAO_STAFF	
Preconditions	At least two scans queued. Ability to disable the network and to stop the n8n workflow.	
Test Data	The queued scans. One throw-away scan to remove in steps 8-10.	
Steps	1. Disable all network, then tap "Sync All Pending". ***Expected:*** Each row fails with a red message such as "Sync Failed" or "Cannot reach n8n (check IP/URL)" and a retry icon. The scans REMAIN in the queue. Nothing is lost.	
	2. Re-enable the network and sync again (or tap a row's retry icon). ***Expected:*** The same scans upload successfully. No scan was dropped by the earlier failure.	
	3. Stop the n8n workflow, then sync. ***Expected:*** The failure is reported on the row (or in a "Connection Interrupted" / "No Answer From n8n" dialog). The scans stay queued rather than being marked as sent.	
	4. Restart n8n and sync. ***Expected:*** The scans upload successfully.	
	5. Send a page n8n cannot use, e.g. a photo of something that is not a form. ***Expected:*** The scan is not silently dropped. Either the "Invalid Scan Rejected" dialog explains why (TC-S17) or it moves to Validation -> "Failed Scans" (TC-S07) where it can be recovered.	
	6. Tap "Pause" in the Sync Queue header. ***Expected:*** A "Paused" chip appears, the sync button reads "Sync Paused" and is disabled, and no new captures upload while paused.	
	7. Tap "Resume". ***Expected:*** Pending scans upload one by one from where they left off.	
	8. Tap the red trash icon on one scan. ***Expected:*** Dialog "Delete this scan?" - "Are you sure you want to remove this scan from the queue? This cannot be undone." Nothing is removed until "Delete" is tapped.	
	9. Tap "Cancel". Then swipe another row to the left and cancel too. ***Expected:*** The scan stays in the queue. The swipe asks "Remove from queue?" with "Cancel" and "Remove".	
	10. Confirm one removal. ***Expected:*** The scan leaves the queue, its image is deleted from the phone, and the "PENDING" counter falls by one if it was pending.	
	11. Force-close the app with scans still queued, then reopen it. ***Expected:*** The queued scans are STILL THERE. The queue survives an app restart.	

Expected Result	Every upload failure leaves the scans safely queued, syncing can be paused and resumed, removal requires confirmation, and the queue survives an app restart.
Actual Result (Pass/Fail)	NOT RUN – Failure, pause and removal were not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data (removal) and needs queued scans. Steps 1, 5 and 11 are the core of this case. A scan lost to a network failure or an app restart is unrecoverable, because the paper form has already been handled and set aside. Removal now deletes the image file too (the older build kept it on the device), so step 10 is final. Code review: the [n8n-proxy] wrapper turns network errors into a plain server error, so the row will most likely say "Sync Failed" and the queue is not auto-paused. Record the exact text shown.
Tester Name / Date	
Panelist's Remarks	

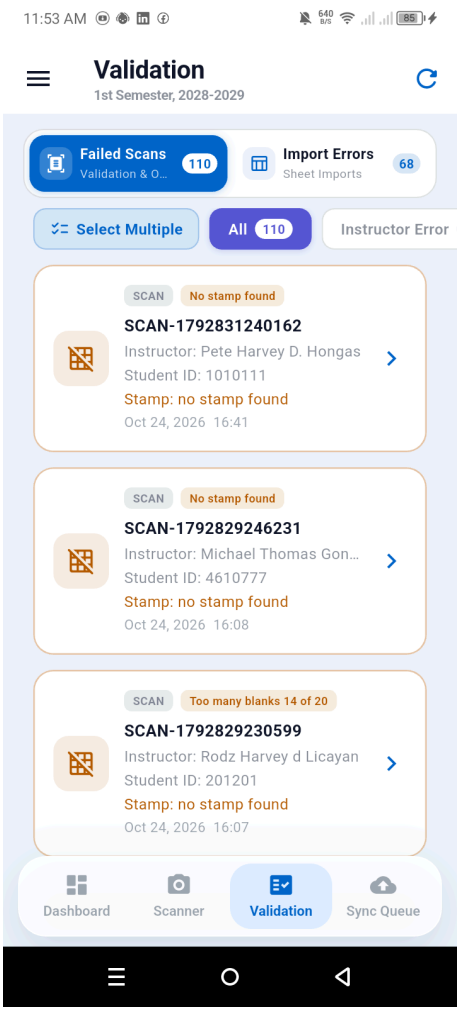
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S06	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	VALIDATION - CORRECT FLAGGED RECORDS [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - editor replaced by Import Errors / "Fix Import Error"	
Account Needed	SAO_STAFF	
Preconditions	At least one record in [import_errors] with status pending, typically because the instructor name could not be matched.	
Test Data	One flagged scan record (tag "SCAN") and one flagged sheet row (tag "GOOGLE SHEET"), with the paper form or the sheet on hand. One throw-away flagged record to discard in step 9.	

Steps	1. Open the "Validation" tab. ***Expected:*** Two sections at the top: "Failed Scans / Validation & OMR" and "Import Errors / Sheet Imports", each with a count badge. While loading it reads "Loading records…".
	2. Tap "Import Errors". ***Expected:*** Filter chips "All", "Instructor Error" and "Subject Error" with counts. With none it reads "No import errors found" and "All records from import_errors have been addressed."
	3. Read a flagged record card. ***Expected:*** Tag "SCAN" or "GOOGLE SHEET", a reason chip "Instructor not found", "Subject not found" or "Instructor & subject not found", the name as read (or "Unknown Instructor"), "Subject: ..." and the date (or "Unknown date").
	4. Open the record. ***Expected:*** Screen "Fix Import Error" with a red banner 'Instructor "<raw>" was not found.' and an "Original Data from Scan" (or "...from Google Sheet") card showing "Instructor (raw)" and "Subject (raw)".
	5. Compare the scores against the paper form or the sheet. ***Expected:*** A scan shows "Scores (editable — from Scan)" with "Tap to edit"; a sheet shows "Scores (locked — from Google Sheet)" and "Read-only". Every score matches what the student marked.
	6. On the scan record, try to type 0, 6 or a letter into a score. ***Expected:*** Refused - each box accepts only one digit from 1 to 5. A box left empty is sent as unanswered, never as 0.
	7. Tap "Submit & Re-Process" without picking an instructor. ***Expected:*** "Select an instructor from the suggestions." Nothing is sent.
	8. Type part of the name into "Correct Instructor Name", pick from the suggestions, do the same for "Correct Subject / Course Code", and tap "Submit & Re-Process". ***Expected:*** Button reads "Sending to n8n…", then "✅ Submitted! Data is now being processed." and the record leaves the list. On failure it reads "Error: ..." rather than appearing to succeed.
	9. On a throw-away flagged record, tap "Discard" and confirm. ***Expected:*** Dialog "Discard Error?" - "This will mark the record as discarded. The original scan stays in the database." Then "Record discarded." and it leaves the list.
	10. Confirm what submitting and discarding actually did. ***Expected:*** The corrected record's scores appear against the instructor named on the paper, for the correct term. The discarded record does NOT count toward any instructor's scores and stays in [import_errors] with status "discarded".
Expected Result	Flagged records show enough raw detail to be corrected against the paper form, scores are constrained to 1-5, re-processing routes the data to the correct instructor, and discarding is confirmed and understood.
Actual Result (Pass/Fail)	NOT RUN – Correcting flagged records was not run.

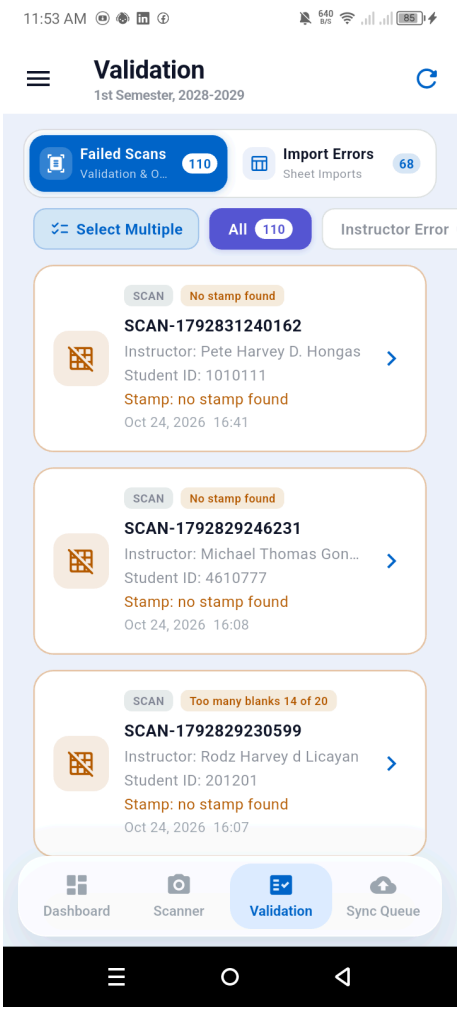
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. The Validation tab opened and showed Failed Scans 110 and Import Errors 68. Step 5 is the whole reason this screen exists. The older build's "Edit Record", "Approve & Sync" and "Data updated and queued for processing." no longer exist; scans the pipeline cannot read go to "Failed Scans" (TC-S07).
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S07	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	FAILED SCANS - RECOVERY QUEUE [DESTRUCTIVE]	
Revision	updated - now a Validation section; "Correct Failed Scan" screen	
Account Needed	SAO_STAFF	
Preconditions	At least one scan has failed detection and sits in [failed_scan_queue] with status pending, e.g. from TC-S05 step 5.	
Test Data	One failed scan with its paper form on hand. One throw-away failed scan to discard in step 7.	
Steps	1. Open the "Validation" tab ("Failed Scans" is selected by default). ***Expected:*** Filter chips "All", "Instructor Error", "Subject Error" and "OMR Result" with counts. With none it reads "No failed scans to validate" and "All scan records in failed_scan_queue have been resolved."	
	2. Read a failed scan card. ***Expected:*** Tag "SCAN" and a reason chip - e.g. "Table/corners not detected", "Grid detection failed", "Detection issue", or a stamp reason such as "No stamp found" - plus the task id, "Instructor:", "Student ID:" and "Stamp:" where known, and the date (or "Unknown date").	
	3. Confirm the reason is specific enough to act on. ***Expected:*** The staff member can tell WHY it failed and therefore whether re-scanning would help. A bare "failed" with no reason is not enough.	
	4. Open the failed scan. ***Expected:*** Screen "Correct Failed Scan" with the task id, a coloured banner with the reasons (and "Details: ..." where n8n left a note), "Scanned Form Image" with "Tap to zoom", and "Original Data from Scan" showing "Instructor (detected)", "Subject (detected)" and "Table / Grid Detection".	
	5. Correct it: check the "Stamp Number" card (TC-S14), pick the instructor and subject (TC-S13), fix "Student ID" and the scores in "Scores (editable — from Scan)", then tap "Submit & Validate". ***Expected:*** "Submitting…", then "Submitted! Correction is being processed." and the screen closes.	
	6. Confirm the outcome of step 5. ***Expected:*** The scan leaves the list and its data reaches the correct instructor for the correct term.	
	7. Open the throw-away failed scan, tap "Discard", cancel once, then repeat and confirm. ***Expected:*** Dialog "Discard Scan?" - "This will permanently remove this failed scan record. Are you sure?" Cancel keeps it; confirming shows "Scan discarded." and it leaves the list.	
	8. Count the failed and discarded scans against the totals. ***Expected:*** Scans that failed or were discarded are NOT counted as gathered on the dashboard or on the admin's "Files Scanned" figure.	
Expected Result	Every failed scan is listed with a specific, actionable reason and can be recovered or deliberately discarded, and failed scans are never counted as successful.	
Actual Result (Pass/Fail)	NOT RUN – Discarding failed scans was not run.	

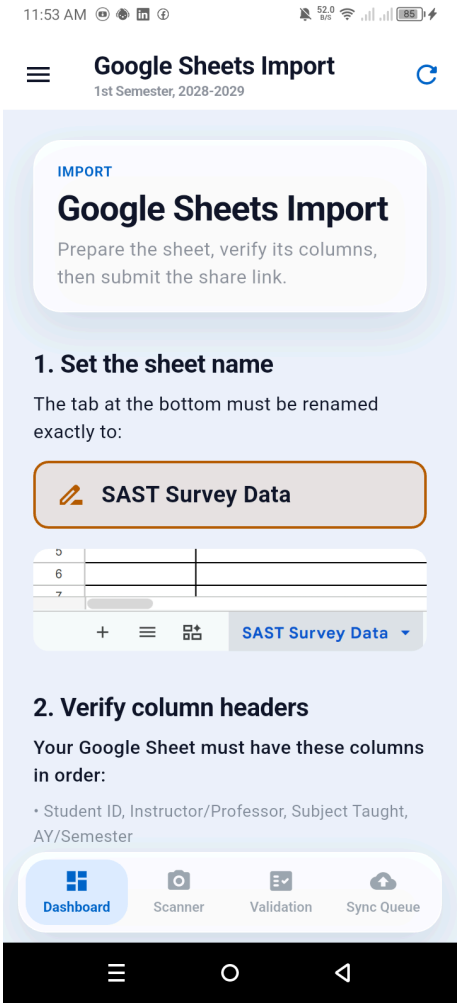
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. Screenshot is the Failed Scans list (110). Step 8 protects the integrity of the reported totals. Step 5 determines whether a failure means real data loss. Code review: "Discard" only sets the row's status to "discarded" in [failed_scan_queue]; the dialog's word "permanently" overstates it. Confirm with the team.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S08	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	IMPORT FROM GOOGLE SHEETS [LIVE DATA]	
Revision	updated - new import screen, job dialog, errors in Validation	
Account Needed	SAO_STAFF	
Preconditions	A prepared Google Sheet of evaluation data, shared so n8n can read it. The n8n import workflow is running.	
Test Data	One prepared sheet (tab "SAST Survey Data"), including one deliberately bad row (an instructor name not in iEvaluate).	
Steps	1. On the dashboard, tap "IMPORT FROM GOOGLE SHEETS". ***Expected:*** Screen "Google Sheets Import" - "Prepare the sheet, verify its columns, then submit the share link." It shows "1. Set the sheet name" with "SAST Survey Data" and "2. Verify column headers" with the expected columns, a link field and "START IMPORT".	
	2. Tap "START IMPORT" with the field empty. ***Expected:*** "Please paste the Google Sheet link first". Nothing is sent.	
	3. Paste the link and tap "START IMPORT". ***Expected:*** The app returns to the dashboard and shows "Processing Data...", then "Importing…" with "Rows found: N", and ends with a clear "Import Successful" or failure dialog - never an indefinite spinner (details in TC-S12).	
	4. Cross-check the imported rows against the sheet. ***Expected:*** "Imported" plus "Not imported (see Import Errors)" equals the rows in the sheet. Nothing is silently skipped.	
	5. Confirm the deliberately bad row was caught. ***Expected:*** It is reported rather than imported, and appears under Validation -> "Import Errors" with the tag "GOOGLE SHEET".	
	6. Confirm the imported data landed against the correct term. ***Expected:*** The records belong to the active term, not a previous one.	
	7. Import the SAME sheet a second time. ***Expected:*** Duplicates are rejected or flagged, NOT counted twice.	
	8. Run the import with n8n stopped. ***Expected:*** A clear failure ("Import Failed"). No partial import is left behind.	
	9. Check the dashboard counters after a successful import. ***Expected:*** OVERALL SURVEYS increases by the "Imported" count, and by no more.	
Expected Result	A sheet imports with visible progress and an explicit outcome, bad rows are reported rather than dropped, re-importing does not double-count, and the counters reflect exactly what was imported.	

Actual Result (Pass/Fail)	PARTIAL – Run on a phone 2026-11-01 (job 7fb16bdf, rerun d24b35f8). Step 1 OK (screen, old column list, link field, START IMPORT). Step 2 OK ("Please paste the Google Sheet link first"). Step 3 OK (Processing Data..., Importing... Rows found: 98, then "Import Successful"). Step 4 FINDING: dialog said Rows 98, Imported 89, Not imported 5 = 94, not 98; the job message says 4 repeated rows were merged and nobody sees that in the dialog. Step 5 partly OK: 5 rows appear in Validation -> Import Errors tagged GOOGLE SHEET, reason "Subject not found" (Michael Thomas Gonzaga, subject "hell yeah"). Step 6 expected behaviour: no new row appeared in sast_all_raw_data_survey (latest created 2026-10-24) because every sheet row was already stored for 1st Semester 2028-2029 by an earlier import on or before 2026-10-24. Sheet rows were already stored from an earlier import; the import updated them instead of duplicating (duplicate protection works). Step 7 partly OK: the same sheet imported again with the same result (Imported 89) and no rows were counted twice. FINDING (minor bug): 5 more duplicate GOOGLE SHEET error records were added (import errors for sheet rose from 59 to 69 after two imports). Step 8 not run (n8n cannot be stopped from the phone). Step 9 expected behaviour: OVERALL SURVEYS stayed 1173 before and after both imports, because no new rows were stored. Older text: NOT RUN – Sheet import was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a Google Sheet link. The Google Sheets Import screen opened; its help lists only the old column layout (Student ID, M1-M10, P1-P10) while the SAST Guidelines accept the new layout too. Step 7 is the one most likely to fail quietly and the most damaging if it does. Confirm the intended behaviour with the team: sheet rows carry no stamp number. The drawer item "Google Sheet / Form Import" and the link icon on the Scanner open the same screen.
Tester Name / Date	
Panelist's Remarks	

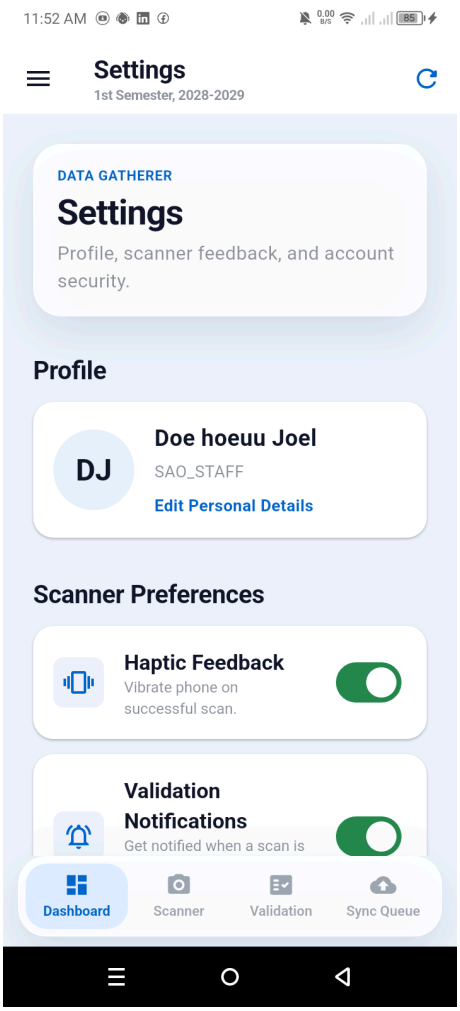
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S09	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	STAFF SETTINGS AND END OF SHIFT	
Revision	updated - Edit Profile dialog, Help section, logout/deactivate	
Account Needed	SAO_STAFF	
Preconditions	Signed in as SAO staff. Access to the account's inbox for the email change.	
Test Data	A new password of at least six characters, NOT recorded in this document. At least one unsynced scan for step 9.	

Steps	1. Open the drawer, then "Settings". ***Expected:*** The screen loads (briefly "Loading gatherer settings…"), reads "Data Gatherer" / "Settings" / "Profile, scanner feedback, and account security." with sections "Profile", "Scanner Preferences", "Help" and "Security" ("Email, password, and account controls.").
	2. Tap "Edit Personal Details", change the name and tap "Save Changes". ***Expected:*** Dialog "Edit Profile" warns that the name must match official school records. "Profile updated successfully!" and the new name appears in the drawer. Blank names give "Please fill in both first and last name."
	3. Toggle "Haptic Feedback" off and on. ***Expected:*** The setting changes and persists after leaving and reopening Settings.
	4. Tap "Edit Email" and submit a valid new address. ***Expected:*** Message reads "Email updated! Check your inbox for confirmation." The old address keeps working until the link is clicked. The current address gives "This is already your current email address."
	5. Tap "Edit Password" and submit mismatched passwords. ***Expected:*** Dialog "Change Password" refuses with "Passwords do not match." Empty fields give "Please fill in all fields."
	6. Submit a password shorter than six characters. ***Expected:*** Refused with "Password must be at least 6 characters."
	7. Submit a fully valid password change. ***Expected:*** Message reads "Password updated successfully. Please log in again." and the app signs out. On failure it reads "Failed to update password." or "Error: ...".
	8. Sign in with the old password, then the new one. ***Expected:*** The old password is rejected; the new one is accepted.
	9. Queue at least one unsynced scan, then tap "End Shift & Log Out". ***Expected:*** Dialog "Log Out" - "You'll return to the sign-in screen. Any synced work will remain available." with "Log out" and "Cancel". IMPORTANT: either the staff member is warned that scans are still pending, or the scans survive the logout.
	10. Complete the logout, sign back in, and check the Sync Queue. ***Expected:*** The pending scans are still there and can be synced.
	11. Open "Deactivate My Account", then CANCEL. ***Expected:*** Dialog "Deactivate Account?" - "Your account will be deactivated and you will no longer be able to access it unless you ask the SAO Admin to reactivate it." with "Send Code". Cancelling leaves the account active.
Expected Result	The staff member can maintain their own account with every password rule enforced, and ending a shift never loses queued scans.
Actual Result (Pass/Fail)	PARTIAL – Settings showed Data Gatherer / Settings with Profile, Scanner Preferences (Haptic Feedback, Validation Notifications), Help and Security; Deactivate My Account opened Deactivate Account? and Cancel left the account active.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1 and 11 only. Steps 2-10 not run: they change the profile, email, password or queue. A 'Validation Notifications' toggle exists beyond the case text. Steps 9 and 10 are the important ones. "End Shift & Log Out" is exactly when a tired user is most likely to lose unsynced work. The logout dialog does not mention pending scans; the queue is stored per account on the phone, so step 10 should pass. Settings -> "Help" -> "SAST Guidelines" is TC-S11.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S10	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	PROFILE COMPLETION DIALOG AFTER SIGN-IN	
Revision	new	
Account Needed	SAO_STAFF (an account with a blank Staff ID and/or address)	
Preconditions	App on the Login screen. In [user_info] the account's university_id or address is empty.	
Test Data	A test SAO_STAFF account missing both ID and address. A valid Staff ID (4-30 letters, numbers or hyphens) and an address.	
Steps	1. Sign in with the test account. ***Expected:*** The dashboard appears, then dialog "Complete your information" - "Your profile is missing your Staff ID and your address. Please add them to continue. This information is required."	
	2. Tap outside the dialog, then press the Android back button. ***Expected:*** The dialog stays open. It has only "Log out" and "Save" - there is no "Later".	
	3. Tap "Save" with every field empty. ***Expected:*** "Staff ID is required", "House number / street is required" and "Barangay is required" are shown. Nothing is saved.	
	4. Type a 2-character Staff ID and save. ***Expected:*** "Staff ID must be at least 4 characters".	
	5. Tap "Log out". ***Expected:*** The app returns to the Login screen. Signing in again asks the same questions.	
	6. Fill a valid Staff ID, "House No. / Street / Purok" and the barangay (pick from the list if offered), then tap "Save". ***Expected:*** The dialog closes with "Your information has been saved."	
	7. Log out and sign in again. ***Expected:*** The dialog does not appear; the values are in [user_info].	
Expected Result	A staff account with a missing ID or address cannot use the app until it is completed, and can always leave by logging out.	
Actual Result (Pass/Fail)	NOT RUN – Profile-completion dialog was not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: needs a staff account with a blank Staff ID or address; the test account showed no dialog. If only one item is missing, the dialog asks only for that one ("...missing your address. Please add it...").	
Tester Name / Date		

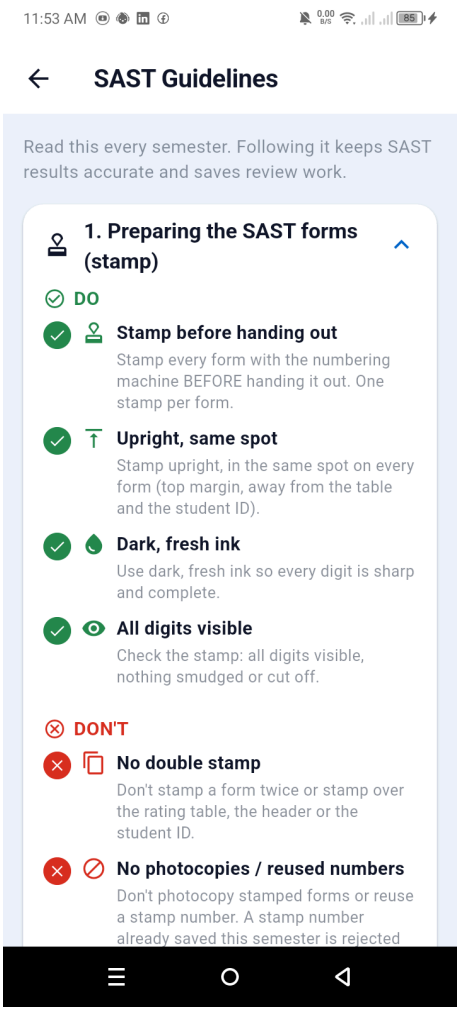
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S11	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SAST GUIDELINES SCREEN	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	Signed out. The guide has not been acknowledged on this phone for the active term (fresh install or cleared app data).	
Test Data	View only.	
Steps	1. Sign in and wait for the dashboard. ***Expected:*** A full-screen "SAST Guidelines" opens by itself: "Read this every semester. Following it keeps SAST results accurate and saves review work."	
	2. Read the section list. ***Expected:*** Five sections from "1. Preparing the SAST forms (stamp)" to "5. Importing a Google Sheet", the first one open, each with DO and DON'T items, and "Questions? Contact the SAO admin."	
	3. Check the rules that the server enforces. ***Expected:*** The guide says only a check or a slash counts, that a form with fewer than 5 answers is not counted, and that a stamp number already saved this semester is rejected as a duplicate.	
	4. Press back without acknowledging, then restart the app. ***Expected:*** The guide opens again on the next start.	
	5. Tap "I have read this". ***Expected:*** The guide closes. Restarting the app does not show it again in the same term.	
	6. Open Settings -> "Help" -> "SAST Guidelines" ("Stamping, filling, scanning, review, import."). ***Expected:*** The same guide opens, without the "I have read this" button.	
Expected Result	Every gatherer sees the SAST rules once per term and can reopen them from Settings at any time.	
Actual Result (Pass/Fail)	PARTIAL – Settings > Help > SAST Guidelines opened the guide with a back arrow and no 'I have read this' button, same text as the admin guide.	

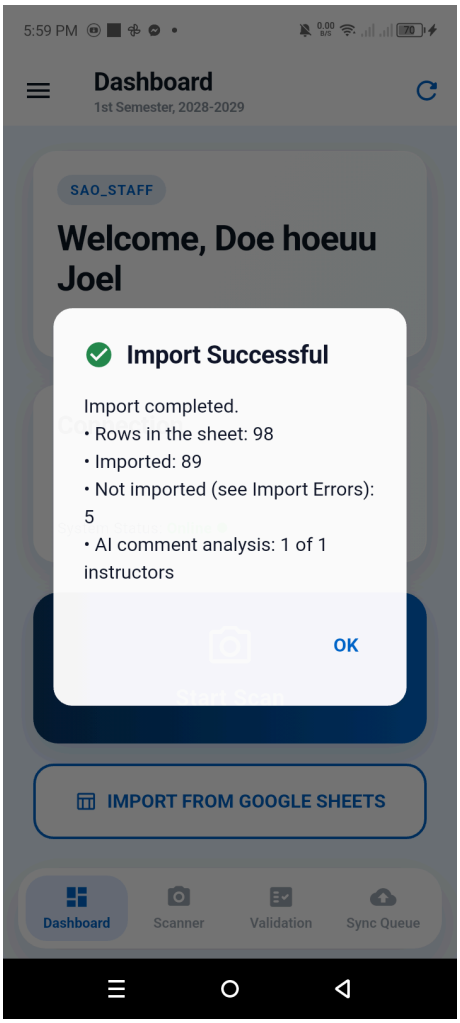
Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 2, 3 (partly) and 6 run. Step 1: the guide did not open by itself after staff sign-in on this build. Steps 4-5 not run. The acknowledgement is stored on the phone per account and per term, so a new phone or cleared data shows it again.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S12	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	GOOGLE SHEET IMPORT JOB - PROGRESS AND FINAL COUNTS [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	The n8n import workflow is running. On the "Google Sheets Import" screen.	
Test Data	A Google Sheet link (tab "SAST Survey Data", about 20 rows, one row with an unknown instructor). A second sheet link that is NOT shared. A note of OVERALL SURVEYS before the import.	
Steps	1. Paste the unshared link and tap "START IMPORT". ***Expected:*** "Import Failed" with the reason n8n gives (no access, not found or no rows), or "Server returned an error (<code>)." Not a success.	
	2. Paste the good link and tap "START IMPORT". ***Expected:*** "Processing Data..." ("Please wait, we are validating and processing your Google Sheet data..."), then "Importing…" with "Rows found: N" and "Saving the rows and analysing the comments. This can take several minutes for a big sheet. Please keep this screen open."	
	3. Try to close the "Importing…" dialog by tapping outside or back. ***Expected:*** It cannot be dismissed while the job runs.	
	4. Wait for the job to finish. ***Expected:*** "Import Successful" - "Import completed." with "• Rows in the sheet: N", "• Imported: X", "• Not imported (see Import Errors): Y" and, if comments were analysed, "• AI comment analysis: a of b instructors".	
	5. Compare the counts with [sheet_import_jobs] for this job and with the sheet. ***Expected:*** The dialog counts match the job row; X + Y equals N.	
	6. Check the dashboard and Validation -> "Import Errors". ***Expected:*** OVERALL SURVEYS rose by X. Y records with tag "GOOGLE SHEET" wait in "Import Errors".	
	7. If the job reports a problem (e.g. AI analysis fails), read the dialog. ***Expected:*** "Import Finished With Problems" with n8n's message, "Failed at step: <node>." and the counts so far.	
Expected Result	A sheet import shows "processing" while it runs and ends with the real final counts, or a clear reason it failed.	

Actual Result (Pass/Fail)	PARTIAL – Run on a phone 2026-11-01. Step 1 PASS: the not-found link (ID 1aaaa...) gave "Import Failed - The sheet has no data rows (tab SAST Survey Data)." Step 2 PASS: "Processing Data..." then "Importing..." with "Rows found: 98" and the "Saving the rows ... keep this screen open" text. Step 3 PASS: tap outside and Back did not close the dialog. Step 4 PASS: "Import Successful - Import completed. Rows in the sheet: 98, Imported: 89, Not imported (see Import Errors): 5, AI comment analysis: 1 of 1 instructors" (job took about 20 seconds). Step 5 FINDING: dialog matches the job row (98/89/5) but X + Y = 94, not 98 (job: matched 93, unmatched 5, 4 repeated rows merged). Step 6 expected behaviour: OVERALL SURVEYS stayed 1173 because every sheet row was already stored for 1st Semester 2028-2029 by an earlier import on or before 2026-10-24. Sheet rows were already stored from an earlier import; the import updated them instead of duplicating (duplicate protection works). Validation -> Import Errors holds the 5 GOOGLE SHEET records (Subject not found). Step 7 not run (no problem case occurred). Older text: NOT RUN – Sheet import job was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a Google Sheet link. If the job runs longer than 60 minutes the app shows "Still Importing" and asks to check before sending the sheet again. With no active term loaded the app refuses with "No active term loaded yet. Try again in a moment."
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S13	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	CORRECTION PICKERS - NOT SAVED, PICK FROM THE LIST [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	A failed scan with an instructor or subject problem is in Validation -> "Failed Scans" ("Instructor Error" chip).	
Test Data	One flagged scan and its paper form. An instructor name that matches two people or nobody (e.g. a surname only).	
Steps	1. Open the flagged scan. ***Expected:*** "Correct the Scan Data" - "The instructor and subject were pre-selected from the scan where it was clear..." Each picker shows "Scan read: <text>" above it.	
	2. Clear "Instructor (search and pick)" and type part of a name. ***Expected:*** A suggestion list appears; placeholder accounts are marked "(placeholder)". Picking one shows a green tick.	
	3. Type a name without picking it and tap "Submit & Validate". ***Expected:*** "Pick the instructor from the list before submitting." and the field reads "Pick the instructor from the list". Nothing sent.	
	4. Turn the network off, reopen the scan so the lists fail to load, then turn the network back on. ***Expected:*** The pickers say "Instructor list unavailable: the typed name is sent as it is." (and the same for the subject).	
	5. Type the ambiguous name and tap "Submit & Validate". ***Expected:*** n8n answers HTTP 422. A red snackbar starts "Not saved" and asks to pick from the list; the picker is marked and "Did you mean:" chips list the candidates. The scan stays in the list.	
	6. Tap the right candidate chip and submit again. ***Expected:*** "Submitted! Correction is being processed." The scores reach the chosen instructor.	
Expected Result	A correction is credited only to an instructor and subject picked from the list; an unknown or ambiguous name is never saved and the staff member is shown candidates.	
Actual Result (Pass/Fail)	NOT RUN – Correction pickers were not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: needs a flagged record to correct; changes shared data. The snackbar text comes from n8n; the app's fallback is "Not saved: pick the instructor and subject from the list and submit again." Record the exact text shown.	
Tester Name / Date		

Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S14	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	CORRECTION WITH A STAMP ALREADY SAVED THIS TERM (409) [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	A failed scan is in Validation -> "Failed Scans". A form with a known stamp number is already counted this term.	
Test Data	The stamp number of the already counted form, and the real stamp number of the flagged form.	
Steps	1. Open the failed scan and read the "Stamp Number" card. ***Expected:*** A status chip ("Read", "Not found", "Unreadable", "Several found" or "Not checked"), "Read from scan", a plain-English reason where needed and the field "Stamp number" with "Digits exactly as printed, keep leading zeros (3–12)."	
	2. Where several numbers were seen, read the choices. ***Expected:*** "Stamped numbers found — tap the right one:" with one chip per number; tapping fills the field.	
	3. Type "12" and tap "Submit & Validate". ***Expected:*** "A stamp number has at least 3 digits." Nothing is sent.	
	4. Type the stamp number of the already counted form and submit. ***Expected:*** n8n answers HTTP 409. Snackbar "Not saved: Stamp <N> is already saved this term (saved on <date>), so that form is already counted. Check the number on the paper and fix it, or discard this scan if it is the same form." The field reads "Already saved this term. Check the number." The scan stays.	
	5. Edit the number. ***Expected:*** The error and the red box clear.	
	6. Type the real stamp number from the paper and submit. ***Expected:*** "Submitted! Correction is being processed."	
	7. On a form with no stamp, tick "This form has no stamp" and submit. ***Expected:*** The field is disabled and the correction is sent with no stamp.	
Expected Result	A correction can never save a stamp number that is already counted this term, and the staff member is told why.	
Actual Result (Pass/Fail)	NOT RUN – Stamp-conflict correction was not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: needs a stamp already saved this term. When the scan reported a missing, unreadable or multiple stamp, an empty field gives 'Type the stamp number, or tick "This form has no stamp".'	

Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

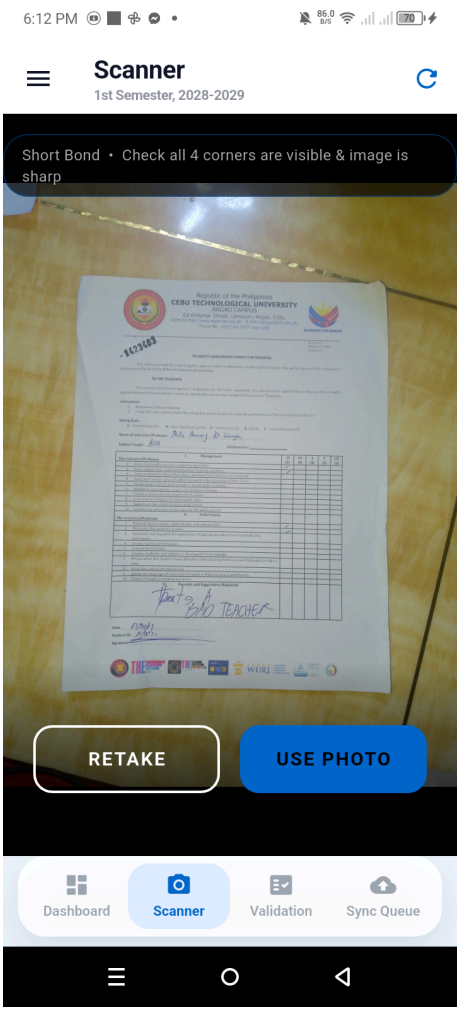
Test Case ID	TC-S15	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	RESCAN OF A FORM ALREADY SCANNED - AUTO-DISCARD [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	On the "Scanner" tab. Syncing not paused. n8n running.	
Test Data	One stamped form already scanned and counted this term. Note OVERALL SURVEYS on the dashboard.	
Steps	1. Scan the already counted form again and tap "USE PHOTO". ***Expected:*** "Captured! Syncing in background..." and the upload starts.	
	2. Wait for n8n to answer. ***Expected:*** Orange snackbar "Already scanned (stamp <N>): this form is not counted again."	
	3. Open the "Sync Queue". ***Expected:*** The row reads "ALREADY SCANNED" with n8n's message (e.g. "Discarded automatically: this form was already scanned (stamp <N>), so it is not counted.") and an orange copy icon - not a green tick, no retry icon.	
	4. Check the dashboard and the Validation tab. ***Expected:*** OVERALL SURVEYS did not rise. The scan is not waiting in "Failed Scans".	
Expected Result	A paper form whose stamp number is already saved this term is discarded by the server, and the gatherer is told so.	
Actual Result (Pass/Fail)	NOT RUN – see Comments	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: needs a form whose stamp was already accepted and stored this term; the test form went to Import Errors so its stamp was not stored.	
Tester Name / Date		
Panelist's Remarks		

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S16	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	FORM WITH FEWER THAN 5 OF 20 ANSWERS - AUTO-DISCARD [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	On the "Scanner" tab. Syncing not paused. n8n running.	
Test Data	Three stamped test forms with unused stamp numbers: (a) 4 rows ticked, (b) exactly 5 rows ticked, (c) 10 rows marked with X only. Agree with the team which instructor they name.	
Steps	1. Scan form (a). ***Expected:*** Orange snackbar with n8n's message, starting "Discarded automatically". The Sync Queue row reads "DISCARDED (FEWER THAN 5 ANSWERS)" with that message and a block icon.	
	2. Check the totals. ***Expected:*** OVERALL SURVEYS did not rise; the form is not in "Failed Scans".	
	3. Scan form (b). ***Expected:*** Accepted normally (SUCCESS) or held for review - NOT discarded.	
	4. Scan form (c). ***Expected:*** X marks are not answers, so it is discarded as fewer than 5 answers (or flagged for review), never counted as 10 answers.	
Expected Result	Forms with fewer than 5 real answers are not counted, the gatherer sees why, and the 5-answer boundary is honoured.	
Actual Result (Pass/Fail)	PARTIAL – A form with 4 answers was captured and uploaded. Server stored it as discarded with the note 'Fewer than 5 of the 20 items were answered (only 4), so this form was discarded automatically and is not counted.' (reasons too_few_answers_4_of_20, stamp_unconfirmed; agreement 85%). FINDING: the Sync Queue row shows SUCCESS instead of DISCARDED, so staff cannot see in the queue that the form was discarded. NOT RUN – Fewer-than-5-answers form was not run.	

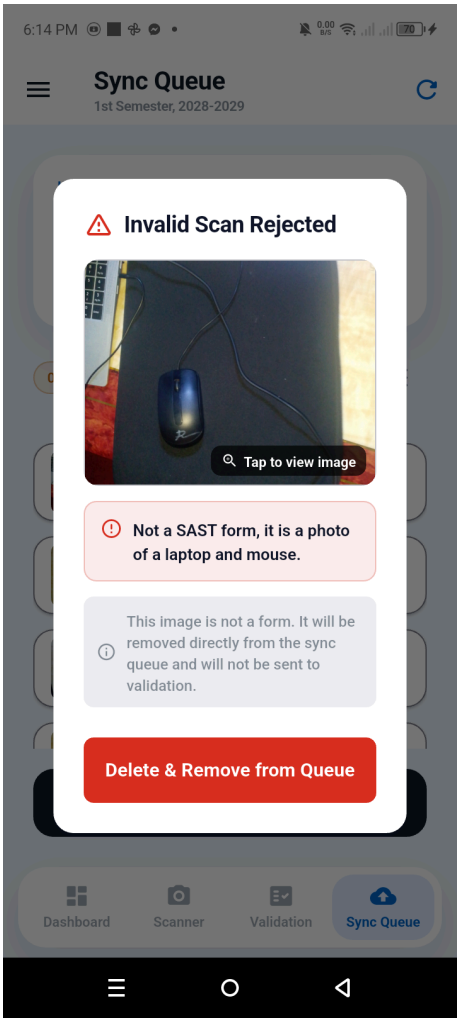
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a form with fewer than 5 answers. Only check (✓) or slash (/) marks count (see TC-S11). Form (b) becomes real data for the named instructor; use a test instructor or discard it afterwards.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S17	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	NOT-A-SAST-FORM IMAGE IS REJECTED [NEGATIVE CASE]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	On the "Scanner" tab. Syncing not paused. n8n running.	
Test Data	Something that is not a SAST form: a plate of food, a selfie, or another school form (e.g. an undertaking).	
Steps	1. Photograph the object and tap "USE PHOTO" (choose "QUEUE ANYWAY" if a blur or dark warning appears). ***Expected:*** The scan is queued and uploads.	
	2. Wait for n8n to answer. ***Expected:*** Dialog "Invalid Scan Rejected" with a thumbnail ("Tap to view image"), the reason from n8n (or "This is not a valid SAST evaluation form.") and "This image is not a form. It will be removed directly from the sync queue and will not be sent to validation."	
	3. Tap the thumbnail. ***Expected:*** The full image opens, marked "NOT A SAST FORM - REJECTED".	
	4. Go back and tap "Delete & Remove from Queue". ***Expected:*** "Invalid scan deleted and removed from queue." The app moves to the "Sync Queue" tab and the scan is gone.	
	5. Check the Validation tab and the totals. ***Expected:*** Nothing was added to "Failed Scans" and nothing was counted.	
Expected Result	Images that are not SAST forms are rejected with a reason and never reach validation or the scores.	
Actual Result (Pass/Fail)	PASS – A photo of a laptop and mouse was queued anyway; the app showed 'Invalid Scan Rejected – Not a SAST form, it is a photo of a laptop and mouse.' with 'Delete & Remove from Queue'; nothing was saved. NOT RUN – Not-a-SAST-form image was not run.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a physical non-SAST page in front of the camera. The dialog has only the delete button. If a real form is wrongly rejected, the image is gone and the paper must be scanned again - confirm with the team that this is wanted.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S18	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	OMR VS GEMINI DISAGREEMENT ON A FAILED SCAN [LIVE DATA]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	A failed scan whose Python OMR and Gemini readings disagree ([failed_scan_queue].omr_comparison has disputed rows).	
Test Data	That flagged scan and its paper form.	
Steps	1. Open Validation -> "Failed Scans" -> chip "OMR Result". ***Expected:*** The scan is listed with its OMR reason chip.	
	2. Open it. ***Expected:*** The banner lists the review reasons (an OMR dispute is shown in indigo).	
	3. Scroll to "OMR Engine Cross-Check Details". ***Expected:*** A chip "N disputed" and "Python OMR and Gemini AI disagreed on the following bubble rows. Reconciled values were pre-filled below for your review:" Each row shows the item (e.g. M3), "Python: x", "Gemini: y" and "Used: z"; a weak Python read has a warning icon.	
	4. Compare every disputed item with the paper. ***Expected:*** The "Used" value is pre-filled in "Scores (editable — from Scan)" and can be corrected.	
	5. Fix any wrong item and tap "Submit & Validate". ***Expected:*** "Submitted! Correction is being processed." The final scores equal the marks on the paper.	
Expected Result	When the two readers disagree, the staff member sees both readings and decides with the paper in hand.	
Actual Result (Pass/Fail)	NOT RUN – OMR vs Gemini case was not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: needs a paper form. The section is hidden when there is no disagreement.	
Tester Name / Date		
Panelist's Remarks		

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S19	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SYNC QUEUE KEPT ACROSS RESTART UNTIL TERM CHANGE [DESTRUCTIVE]	
Revision	new	
Account Needed	SAO_STAFF, plus SAO_ADMIN to change the active term	
Preconditions	Agreed time window: changing the active term affects every user and clears every gatherer's local queue.	
Test Data	In the Sync Queue: two SUCCESS scans, one "ALREADY SCANNED" scan (TC-S15) and one pending scan (paused). The old and new term names.	
Steps	1. Note the chips ("N pending", "N synced") and the dashboard counters. Force-close the app and reopen it. ***Expected:*** Every row is still listed with the same status and the same counts. SUCCESS on the dashboard did not reset to 0.	
	2. Log out and sign back in. ***Expected:*** Same rows and counts as step 1.	
	3. Look at the "ALREADY SCANNED" row after the restart. ***Expected:*** It still reads "ALREADY SCANNED", not "SUCCESS".	
	4. Keep the pending scan unsynced. Have the SAO admin change the active term. ***Expected:*** "Updating term…" - "The active term is now <term>. Reloading your data." The app bar shows the new term.	
	5. Open the Sync Queue. ***Expected:*** Synced rows from the old term are cleared ("Everything is synced" if nothing else is left). The pending scan must NOT be silently lost: it is uploaded first, or the gatherer is warned.	
	6. Have the SAO admin set the original term back. ***Expected:*** The app follows the change again.	
Expected Result	Uploaded scans stay visible across restarts and logouts for the whole term and are cleared only by a term change, and a term change never silently loses an unsynced scan.	
Actual Result (Pass/Fail)	NOT RUN – Queue-across-restart/term case was not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. Code review: on a term change the app deletes every queued scan, pending ones included, with their images; and the restart restores rows without their "ALREADY SCANNED" / "DISCARDED" outcome. Expect steps 3 and 5 to FAIL; raise defects if they do.	
Tester Name / Date		

Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S20	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	MULTI-SELECT DELETE IN SYNC QUEUE AND VALIDATION [DESTRUCTIVE]	
Revision	new	
Account Needed	SAO_STAFF	
Preconditions	At least three scans in the Sync Queue. At least three throw-away records in Validation ("Failed Scans" and "Import Errors").	
Test Data	Records created for this test only.	
Steps	1. In the Sync Queue tap the tune icon ("Select multiple"), or long-press a row. ***Expected:*** A bar "x/y selected" with a select-all box, "Delete (n)" and "Done"; rows show checkboxes; swiping is off.	
	2. Select two rows, tap "Delete (2)", then "Cancel". ***Expected:*** Dialog "Delete selected scans?" - "Are you sure you want to remove 2 scans from the queue? This cannot be undone." Cancel keeps them.	
	3. Repeat and tap "Delete". ***Expected:*** Both rows and their images are removed; "Done" leaves the mode.	
	4. In Validation -> "Failed Scans", tap "Select Multiple" (or long-press a card) and tick the select-all box. ***Expected:*** Only the cards in the current chip are selected ("x/y selected").	
	5. Switch to "Import Errors". ***Expected:*** The selection is cleared.	
	6. Select two throw-away records, tap "Delete (2)" and confirm. ***Expected:*** Dialog "Delete selected records?" - "Delete 2 records? These records will be permanently removed from the system. This cannot be undone." Then "2 records removed."	
	7. Check the database. ***Expected:*** Failed scans are set to "discarded" in [failed_scan_queue]; import errors are deleted from [import_errors].	
Expected Result	Many items can be removed at once, only after a clear confirmation, and only the items actually selected.	
Actual Result (Pass/Fail)	NOT RUN – Multi-select delete was not run.	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. Code review: batch delete really deletes [import_errors] rows, while the single "Discard" (TC-S06) keeps them as "discarded". Confirm with the team which is intended.	
Tester Name / Date		

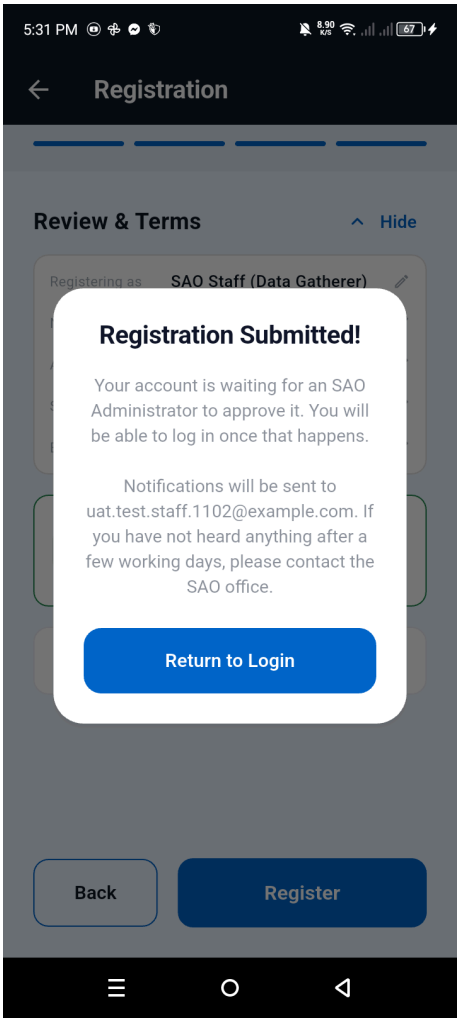
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-S21	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SIGN UP AS SAO STAFF - NO COLLEGE OR DEPARTMENT	
Revision	new	
Account Needed	none (new registration; SAO_ADMIN to reject it afterwards)	
Preconditions	App on the Login screen.	
Test Data	A disposable email address and Staff ID for the new account.	
Steps	1. Tap "Register". In "I am registering as" pick "SAO Staff (Data Gatherer)". ***Expected:*** The role is listed; "SAO Admin" is not.	
	2. Continue to step 2 of the form. ***Expected:*** Heading "Personnel Details" with "Registering as SAO Staff (Data Gatherer).", a "Staff ID" field and "Institutional Email". No "Select College" and no "Select Department".	
	3. Type a Staff ID. ***Expected:*** "This Staff ID is available" or "This Staff ID is already registered".	
	4. Go back and pick an instructor role instead. ***Expected:*** Heading "Academic Information" with "University ID" and "Select College"; continuing without one gives "Please select a college".	
	5. Switch back to "SAO Staff (Data Gatherer)". ***Expected:*** The college and department fields disappear again.	
Expected Result	The college picker added for faculty never applies to SAO staff, who register with a Staff ID only.	
Actual Result (Pass/Fail)	PARTIAL – Register listed no SAO Admin role; picking SAO Staff (Data Gatherer) led to Personnel Details with 'Registering as SAO Staff' and no college or department picker.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1 and 2 run; stopped before submitting. Steps 3-5 not run. Stop before the final submit unless the SAO admin will reject the test registration afterwards.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SUMMARY

```
Total cases     : 21  (9 updated, 12 new, 0 unchanged, 0 removed)
Executed        : 1 partial on an older build (TC-S01 steps 1, 3, 4,
                  31/08/2026). Must be re-run on this build.
Not executed    : 21 on the 2026-10-28 build

Cases that change live data : TC-S02, S04, S05, S06, S08, S12, S13, S14,
                              S15, S16, S18
Destructive (shared data)   : TC-S06, S07, S19, S20
Negative cases              : TC-S03, TC-S05, TC-S17

WHAT THIS DOCUMENT EXISTS TO PROVE
  1. A captured scan is stored locally BEFORE any upload      (TC-S02/8)
  2. A failed upload leaves scans queued, never dropped       (TC-S05/1)
  3. The queue survives restarts until the term changes       (TC-S05/11,
                                                               S19)
  4. Ending a shift does not discard unsynced scans           (TC-S09/9,10)
  5. Unreadable captures are refused before they queue        (TC-S03, S17)
  6. Failed scans carry an actionable reason and can recover  (TC-S07)
  7. The same form is never counted twice                     (TC-S04/8,
                                                               S08/7, S14,
                                                               S15)
  8. A staff account cannot reach any admin screen            (TC-S01/2)
  9. Forms with fewer than 5 answers are not counted          (TC-S16)
 10. Corrections credit only a picked instructor and subject  (TC-S13)

Items 1 to 4 are about DATA LOSS. A paper form is handled once, so a scan
lost anywhere in this pipeline is gone for good. Treat any failure in those
four as the highest-severity defect in the project, ahead of anything
cosmetic.

CODE-REVIEW RISKS TO CONFIRM BY TEST (no DEF number until reproduced)
  - Term change deletes pending, unsynced scans too         (TC-S19/5)
  - Restart drops the "ALREADY SCANNED" / "DISCARDED" label  (TC-S19/3)
  - Batch delete removes import errors; single discard keeps (TC-S20/7)
  - Not-a-form rejection has no way to keep the image        (TC-S17)
  - "SUCCESS / synced this session" now persists all term    (TC-S01/5)

CROSS-CHECK ALREADY CONFIRMED (older build, 31/08/2026)
  The staff dashboard's term total (152) matched the SAO admin dashboard's
  "152 Files Scanned" for the same term, so the two roles agreed on how much
  data had been gathered. Repeat it on this build in TC-S01 step 5.
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SIGN-OFF

Tester : _____ Date: _____

QA Engineer : Mark Lawrence Medillo _____ Date: _____

Project Leader : Rodz Harvey Licayan _____ Date: _____

PANELIST'S REMARKS

_____

_____

_____

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

iEvaluate - SAO Staff (Data Gatherer) Module UAT - Team ERMM Cebu Technological University, Argao Campus

Department Head

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

USER ACCEPTANCE TESTING - DEPARTMENT HEAD MODULE

```
Revised 2026-11-01 for app build of 2026-10-28 (commit 926b836)
  - Labels renamed to one name per screen: "Department Overview", tab
    "Interventions", "Subject Performance", "Account Settings", "Official
    SAST Report". Every quoted label was re-checked against the Dart code.
  - Subjects are scoped by the TEACHING instructor's department, not the
    subject's owning program (TC-D07, new TC-D12).
  - Student remarks and the department views are locked down by RLS (TC-D13).
  - Forced "Complete your information" dialog after sign-in when the ID or
    address is missing; "Log out" replaces "Later" (TC-D11).
  - Official two-format SAST PDF with per-subject pages, packed word cloud
    and editable signatories (TC-D14).
  - Shared rating bands; a missing mean shows "—" / "No data", never 0
    (TC-D15). Packed word cloud on the Overview (TC-D01).
  - Intervention email hardened: sent at most once, tracked in emailed_at;
    write rules on [intervention_reports] (TC-D16).
  - Student interpretation, insight cards and word cloud, reached through
    "Switch to Instructor View" (TC-D17).
  - Account activation (admin-activate-account) is SAO-admin only and is
    NOT reachable from this role; it is covered in the SAO Admin UAT.
  - No case had a recorded Actual Result, so none was moved to Comments.
  - Cases: 1 unchanged, 9 updated, 0 removed, 7 new (17 in total).
================================================================================
CEBU TECHNOLOGICAL UNIVERSITY - ARGAO CAMPUS
COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department
USER ACCEPTANCE TESTING - DEPARTMENT HEAD MODULE
================================================================================
Capstone Project Title : iEvaluate: An AI-Driven Mobile Instructor Evaluation
                         and Performance Analysis System Using N8n Workflow
                         Automation
Team                   : ERMM
Project Leader         : Rodz Harvey Licayan
Front-End Programmer   : Michael Thomas Gonzaga
QA Engineer            : Mark Lawrence Medillo
Technical Writer       : Evangeline Caruana
Role under test        : DEPARTMENT_HEAD / DEAN  ("Department Head")
Device                 : Infinix X6525, Android 13
Active term            : 2nd Semester, 2027-2028
Build under test       : 2026-10-28, commit 926b836 (branch main)
Test account           : the department head account held by the tester.
                         Credentials are deliberately NOT recorded here.
WHAT THIS ROLE DOES
  The Department Head reviews the faculty in their OWN department, spots who is
  struggling, and takes formal action through an intervention report. Two
  properties matter more than anything cosmetic:
    1. SCOPE  - a head sees only their own department, never the whole college.
    2. EFFECT - an intervention they raise reaches the instructor, and an
                instructor cannot dismiss it.
  This role can also deactivate an instructor's account, so that path is tested
  explicitly.
--------------------------------------------------------------------------------
HOW TO READ THIS DOCUMENT
--------------------------------------------------------------------------------
* Text in "double quotes" appears on screen exactly as written.
* Names in [square brackets] are database tables or services to check when a
  step needs back-end verification.
* Each step has its own expected result, so a failed case identifies WHICH
```

```
  step failed.
* "Actual Result" is blank where the case has not been run.
* "Revision" says whether a case is unchanged, updated or new for the build
  above. "Account Needed" names the account(s) the case needs.
!! WARNING !!
  Cases marked [LIVE DATA] create real intervention records against real
  instructors, or deactivate a real account. Run them on staging, or on a
  throwaway instructor account, and never during a live evaluation period.
  Cases marked [DESTRUCTIVE] change the shared database in a way that needs
  an SAO admin to undo. TC-D08 (deactivating an instructor) is the
  highest-impact action in this module.
--------------------------------------------------------------------------------
SCREEN COVERAGE
--------------------------------------------------------------------------------
  SCREEN                  REACHED BY                          CASE
  ----------------------- ----------------------------------- --------------
  Login / profile dialog  Sign in                             TC-D01, D11
  Department Overview     Tab "Overview"                      TC-D01, D13
  Faculty Roster          Tab "Faculty"                       TC-D02, D08
  Instructor Detail       Tap a faculty row                   TC-D03, D08, D15
  Official SAST Report    "View Official SAST Report"         TC-D09, D14, D15
  Subject Performance     Tab "Subjects"                      TC-D07, D12
  Intervention Reports    Tab "Interventions"                 TC-D04, D06, D16
  Account Settings        Drawer "Account Settings"           TC-D10
  Instructor view         Drawer "Switch to Instructor View"  TC-D17
  (cross-role)            Instructor's dashboard and inbox    TC-D05, D16
  (back-end)              REST / SQL as the head              TC-D13, D16
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D01	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SIGN IN AS DEPARTMENT HEAD AND READ THE DEPARTMENT OVERVIEW	
Revision	updated - renamed labels, no forms panel, packed word cloud	
Account Needed	DEPT_HEAD (plus a DEPT_HEAD with no department, step 13)	
Preconditions	App on the Login screen. Account is active with role DEPARTMENT_HEAD or DEAN, IS assigned to a department, and has its ID and address filled in (otherwise see TC-D11 first).	
Test Data	View only. Tables [department_table], [user_info], [overall_total_survey], [intervention_reports]. At least one flagged instructor (steps 9-12) and the intervention filed in TC-D04 (step 12). A second head account with NO department (step 13).	

Steps	1. Sign in with the department head credentials. ***Expected:*** Routes to the department head landing screen, NOT the instructor or admin dashboard. Bottom tabs read "Overview", "Faculty", "Subjects", "Interventions".
	2. Confirm the role boundary. ***Expected:*** There is NO route to any SAO Admin screen - no Users, no Personnel, no System Settings. The drawer offers only "Account Settings", "Switch to Instructor View" and "Log Out". A head who can reach an admin screen is a FAIL.
	3. Read the header and leadership area. ***Expected:*** The app bar reads "Department Overview" with the active term under it. The page header shows "Department Leadership" above "Department Overview", with this head's department name below.
	4. Read the summary card. ***Expected:*** Shows "Department Average" as a value over "/5.0" ("—" when no one has results) and "Active Faculty". When only some faculty have results it adds "Based on N of M faculty"; with none it reads "No evaluations yet this term".
	5. Confirm the department average only covers THIS department. ***Expected:*** The figure reconciles with this department's instructors only. No instructor from another department contributes.
	6. Read "Department Growth". ***Expected:*** Subtitle reads "Weighted mean across recent academic terms." with a bar per term, one colour per school year. With no history it reads "No historical data available yet".
	7. If an instructor of this department is deactivated but still has results this term, read the line under "Active Faculty". ***Expected:*** Reads "1 deactivated, results still counted" (or "n deactivated, results still counted"), matching the DEACTIVATED rows on the Faculty tab.
	8. Read "Department Voice (AI Analysis)". ***Expected:*** Subtitle reads "Aggregated themes from all student comments across the college." The words are packed into one dark panel, larger = more frequent, with no overlapping words and no scrolling. With no data it reads "No feedback data yet for this term."
	9. Read the "Action Required" section. ***Expected:*** Subtitle reads "Faculty and curriculum signals that need review." With nothing flagged it reads "No critical issues detected." Alerts carry titles such as "Low Performance Alert", "Highly Negative Feedback Detected" or "3-Strike Alert: Termination Review".
	10. Note every instructor listed under "Action Required", then open the "Interventions" tab and compare against "Pending Action Required". ***Expected:*** The two lists MATCH. The dashboard must never show a flagged instructor that the Interventions tab counts as handled.
	11. Tap the alert indicator in the app bar. ***Expected:*** With alerts it reads "N Alerts" and scrolls to "Action Required"; with none, tapping the bell shows "✅ All clear! No active alerts."
	12. After filing an intervention for one flagged instructor (TC-D04), return to the dashboard and pull to refresh. ***Expected:*** That instructor's alert is gone and "N Alerts" drops by one. The suppression is scoped to the active term only: if they are still below the line in a later term the alert returns - that is the 3-strike rule working, not a regression.
	13. Sign in as a department head with NO department assigned. ***Expected:*** The app does not crash. The header falls back to "Department" and the figures read as empty ("—", "No evaluations yet this term", "No critical issues detected."). This build shows no dedicated "no department" message.
Expected Result	The head lands on their own overview with no admin access, and every figure is scoped to their department alone.
Actual Result (Pass/Fail)	PARTIAL – Department head landed on Department Overview with tabs Overview / Faculty / Subjects / Interventions, drawer Account Settings / Switch to Instructor View / Log Out, Department Average 3.18 (8 of 9 faculty), Active Faculty 9, Growth chart, Department Voice and one Low Performance Alert.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-4, 6, 8, 9 run. Steps 5, 7, 10-13 not run or not verified. Alert text says 'below the strict 3.0 benchmark'; the Interventions tab showed 1 pending, consistent with the 1 alert. Step 5 is the substance of this case. A head seeing another department's figures is a confidentiality failure, not a cosmetic bug. Step 8's subtitle still says "across the college" while the data is department-scoped (the view is filtered to the head's department, see TC-D13). Confirm the wording. The old "Total Forms Processed" figure and "Forms Collected" panel do not exist in this build; those steps were dropped. Alert threshold: both this screen and the Interventions tab flag a score below the DEPARTMENT AVERAGE (3.0 when there is none), while the alert text says "below the strict 3.0 benchmark". Confirm which rule is intended.
Tester Name / Date	
Panelist's Remarks	

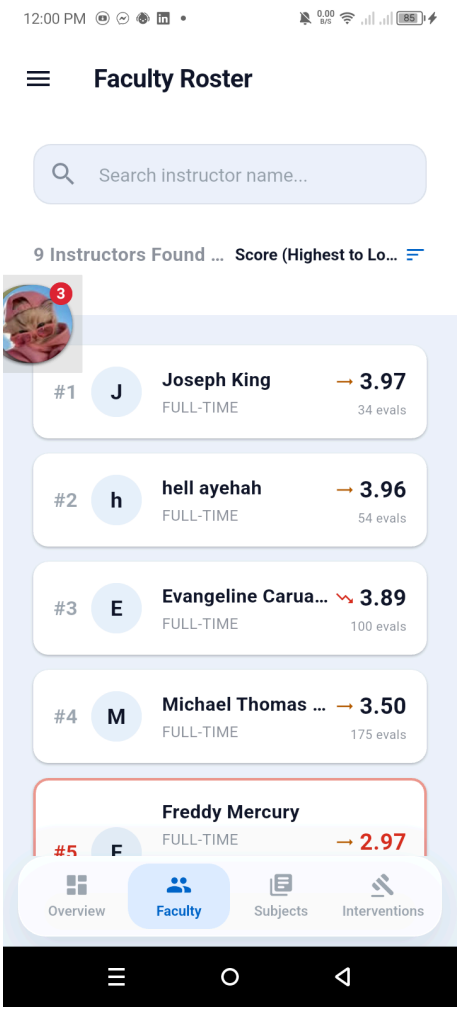
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D02	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	FACULTY ROSTER - SEARCH, SORT AND FLAGGED FACULTY	
Revision	updated - new row layout, name-only search, "—" sorts last	
Account Needed	DEPT_HEAD	
Preconditions	Signed in as department head with several instructors in the department, at least one scoring below 3.00 and one with no results this term.	
Test Data	View only. Tables [user_info] and [instructor_departments] (is_primary) filtered by department, [overall_total_survey]. The name of one instructor from ANOTHER department (step 8).	

Steps	1. Open the "Faculty" tab. ***Expected:*** Screen titled "Faculty Roster". While loading it reads "Loading faculty roster…"; with none it reads "No instructors yet" and "Faculty assigned to this department will appear here." A count line reads "N Instructors Found" (with "· n deactivated" added when deactivated faculty are listed).
	2. Confirm who is listed. ***Expected:*** ONLY instructors whose primary department is this head's department, never the head themselves. Cross-check against [instructor_departments] for that department ID.
	3. Read one faculty row. ***Expected:*** Shows a rank ("#1", "#2", ...), the initial, the instructor's name and role, a trend arrow, the overall score to two decimals ("—" when there are no results) and "N evals".
	4. Find an instructor scoring below 3.00. ***Expected:*** The row has a red border and a red rank and score, so a head can spot who needs attention without reading every score. An instructor with no results ("—") is NOT shown in red.
	5. Type a partial name into "Search instructor name...". ***Expected:*** The list narrows to matching names (case-insensitive). Search matches names only; typing a university ID finds nobody.
	6. Search for a name that does not exist. ***Expected:*** Reads "No matching instructors" and "Try a different name or university ID." - not a blank screen.
	7. Tap "Clear Search". ***Expected:*** The full roster returns.
	8. Search for an instructor who belongs to ANOTHER department. ***Expected:*** They are NOT found. Search must not reach outside the department.
	9. Apply each sort option: "Name (A-Z)", "Score (Highest to Lowest)", "Score (Lowest to Highest)". ***Expected:*** The default is "Score (Highest to Lowest)". Each reorders the list correctly, instructors with no results stay at the bottom in both score orders, and the sort survives a search being applied and cleared.
	10. Tap a faculty row. ***Expected:*** The instructor detail page opens for that person.
Expected Result	The roster lists only this department's faculty, flags who needs intervention, and search and sort work without ever exposing another department's staff.
Actual Result (Pass/Fail)	PARTIAL – Faculty Roster showed 9 Instructors Found, 2 deactivated, sorted Highest to Lowest, with deactivated rows marked 'Results still counted in this term'.

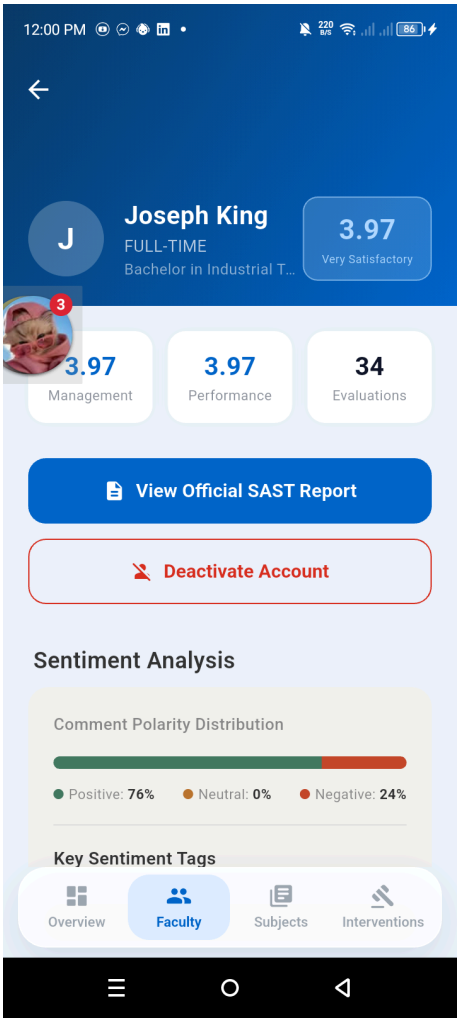
Screenshot	
Comments / Attachments (Screenshots, Logs)	List and default sort checked; search and changing the sort not exercised. Step 8 is the confidentiality check. Step 5: the empty-state hint mentions "university ID" but search matches names only. Raise as a wording defect or a missing feature. The roster row no longer shows "Overall Score", "Total Evals", a sentiment split or an "Intervention Required" marker; a low score is shown by the red border instead.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D03	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	INSTRUCTOR DETAIL - PERFORMANCE AND SENTIMENT	
Revision	updated - 2-decimal scores, "—" = no data, all classes listed	
Account Needed	DEPT_HEAD (and the INSTRUCTOR for the step 3 cross-check)	
Preconditions	An instructor with evaluation data is open from the roster.	
Test Data	View only. Tables [overall_total_survey], [management_results], [performance_results], [student_remarks], [instructor_subjects]. One instructor with no results this term (step 9).	
Steps	1. Open an instructor from the roster. ***Expected:*** The profile loads (briefly "Loading instructor profile…") and names the instructor with their role and department, the overall score and its verbal description.	
	2. Read the score summary. ***Expected:*** Shows "Management" and "Performance" to two decimals and "Evaluations" (a count) for the active term.	
	3. Cross-check those figures against what the INSTRUCTOR sees on their own dashboard. ***Expected:*** Both roles report the SAME numbers for the same instructor and term. A discrepancy here undermines every conversation the head will have with that instructor.	
	4. Read "Performance Trend". ***Expected:*** Subtitle reads "Historical score across all evaluation terms" with a value per term. With none it reads "No historical data available."	
	5. Read the "Sentiment Analysis" area. ***Expected:*** Shows "Comment Polarity Distribution" with a percentage for "Positive", "Neutral" and "Negative", plus "Key Sentiment Tags". With no remarks the bar is grey, all three read 0% and the only tag reads "No Data Yet".	
	6. Cross-check the sentiment split against [student_remarks] for that instructor and term. ***Expected:*** The percentages reflect the stored tone values.	
	7. Read "Subjects This Term". ***Expected:*** Every class the instructor teaches this term is listed, whichever program owns the subject, each with its score and verbal description. With none it reads "No subjects this term" and "Assigned subjects will appear here when available."	
	8. Confirm every verbal description matches its band. ***Expected:*** "Outstanding" >= 4.20, "Very Satisfactory" >= 3.40, "Satisfactory" >= 2.60, "Fair" >= 1.80, "Unsatisfactory" >= 1.00, compared on the two-decimal value - the same bands as the report and the PDF (see TC-D15).	
	9. Open an instructor with no evaluations yet. ***Expected:*** The score chips read "—" and the description reads "No data", rather than showing 0.00 as if it were a real score.	
Expected Result	The head sees a complete and accurate picture of one instructor, and every figure agrees with what that instructor sees themselves.	

Actual Result (Pass/Fail)	PARTIAL – Instructor detail showed 3.97 Very Satisfactory with Management 3.97, Performance 3.97, 34 Evaluations, Sentiment Analysis (76% / 0% / 24%) and View Official SAST Report / Deactivate Account.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only. Deactivate not tapped. Step 3 is the important one. Two roles disagreeing about the same instructor's score is a serious data defect. Step 7 changed on purpose: the list is no longer limited to subjects the head's department owns (see TC-D12).
Tester Name / Date	
Panelist's Remarks	

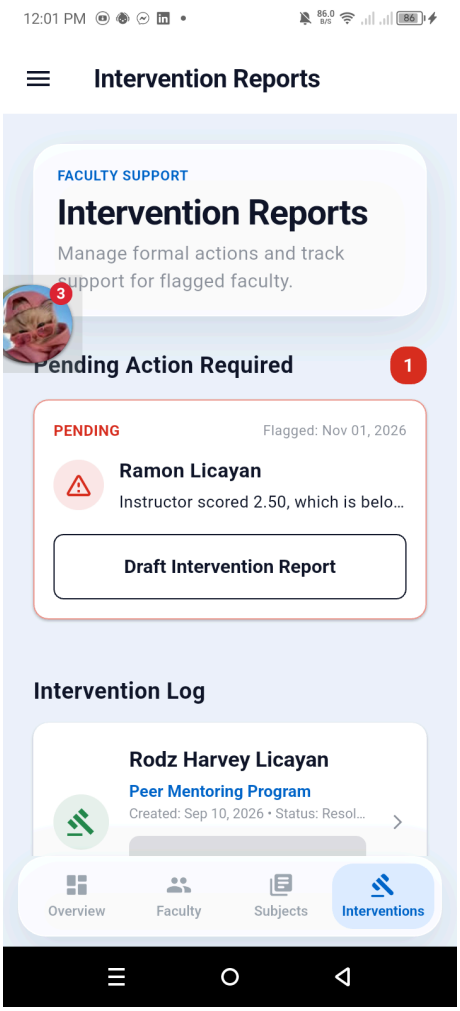
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D04	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	DRAFT AN INTERVENTION REPORT [LIVE DATA]	
Revision	updated - "Interventions" tab, four actions, record in the Log	
Account Needed	DEPT_HEAD	
Preconditions	Signed in as department head. One flagged instructor, ideally a throwaway account, whose primary department is the head's. Table [intervention_reports], written via [evaluation_service].	
Test Data	One intervention against a throwaway instructor, with a short note such as "UAT test - please ignore". A second flagged instructor (or a later term) for step 8.	

Steps	1. Open the "Interventions" tab. ***Expected:*** Screen titled "Intervention Reports"; page header "Faculty Support" / "Intervention Reports" with "Manage formal actions and track support for flagged faculty." While loading it reads "Loading interventions…".
	2. Read the pending and history areas. ***Expected:*** Flagged instructors appear under "Pending Action Required" with a count; filed reports under "Intervention Log". With nothing pending it reads "All caught up" and "No pending interventions require action."; with no history, "No intervention history" and "Completed and resolved interventions will appear here."
	3. Read a flagged alert. ***Expected:*** Shows a "PENDING" badge, "Flagged: <date>", the instructor's name and the reason, so the head knows why the system raised it.
	4. Tap "Draft Intervention Report" on that alert. ***Expected:*** A sheet titled "Draft Intervention" opens, showing "Instructor: <name>" and "Flagged for: <reason>".
	5. Open the "Mandated Action" selector. ***Expected:*** Exactly four actions: "Peer Mentoring Program", "Pedagogy & Teaching Workshop", "Curriculum Review Meeting" and "Formal Administrative Warning".
	6. Check whether the form can be submitted with no action. ***Expected:*** Not possible. "Peer Mentoring Program" is pre-selected and the selector has no empty option, so every record states an action.
	7. Choose an action, type notes in "Dean's Remarks / Notes" and tap "Submit Official Report". ***Expected:*** The button shows a spinner and cannot be pressed twice. Message reads "Intervention recorded successfully.", the sheet closes, the alert leaves "Pending Action Required", and the record appears at the top of "Intervention Log" reading "Created: <date> • Status: Pending".
	8. File an intervention with the notes left empty. ***Expected:*** Accepted. Its details dialog shows "No notes provided." rather than an empty gap.
	9. Confirm the record in [intervention_reports]. ***Expected:*** One row naming the correct instructor (instructor_id and instructor_name), the acting head as dean_id, the action type, status 'Pending', the active term_id and the creation date.
	10. Tap the record in "Intervention Log". ***Expected:*** "Intervention Report Details" opens with "Instructor: <name>", "Action: <action>", "Notes:" with the notes, "Status: Pending" and a "Close" button.
	11. Try to draft a second intervention for the SAME instructor this term. ***Expected:*** There is no path: the instructor's alert left the pending list in step 7, so no "Draft Intervention Report" button is offered for them until the next term.
Expected Result	A formal intervention can be raised against a flagged instructor with a mandated action type recorded, and it is stored and listed as pending.
Actual Result (Pass/Fail)	NOT RUN – Filing an intervention was not run.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: creates an intervention and may email an instructor. The Interventions tab showed 1 pending, matching the Overview alert. The email that this filing sends, and the database write rules behind it, are tested in TC-D16. The roster no longer offers "Draft Intervention Report"; drafting starts only from a pending alert on this tab.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D05	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	THE INSTRUCTOR RECEIVES THE INTERVENTION [CROSS-ROLE, LIVE DATA]	
Revision	unchanged	
Account Needed	DEPT_HEAD + INSTRUCTOR (second device)	
Preconditions	The intervention from TC-D04 exists. A SECOND device signed in as that instructor, with their dashboard open.	
Test Data	The intervention raised in TC-D04. WHY THIS CASE EXISTS An intervention that the instructor never sees is useless, and one the instructor can delete is not a formal record. This case tests both halves of that, across two roles at once.	
Steps	1. With the instructor's dashboard already open and NOT restarted, raise the intervention from the head's device. ***Expected:*** The instructor's dashboard updates by itself. The app subscribes to live changes on [intervention_reports], so no manual refresh or restart should be needed.	
	2. Read what appears on the instructor's dashboard. ***Expected:*** A card headed "Official Notice — Action Required" appears at the top, showing "From:", "Action:" and "Notes:", plus the date.	
	3. Confirm the content matches what the head submitted. ***Expected:*** The action type and notes are exactly what was recorded in TC-D04, attributed to the correct department head.	
	4. Read the instructor's notification bell. ***Expected:*** A count badge appears, and the bell reports the active notice rather than staying silent.	
	5. As the INSTRUCTOR, attempt to dismiss, delete or hide the notice. ***Expected:*** There is NO such control. A lock icon carries the tooltip "Only your department head can remove this notice".	
	6. Restart the instructor's app. ***Expected:*** The notice is still there. It is not a transient message.	
	7. Confirm a DIFFERENT instructor does not see this notice. ***Expected:*** The notice appears only for the instructor it was raised against.	
Expected Result	An intervention raised by the head reaches the correct instructor live, states what was mandated and by whom, persists across restarts, and cannot be removed by the instructor.	
Actual Result (Pass/Fail)	NOT RUN – Instructor-side intervention was not run.	
Screenshot		

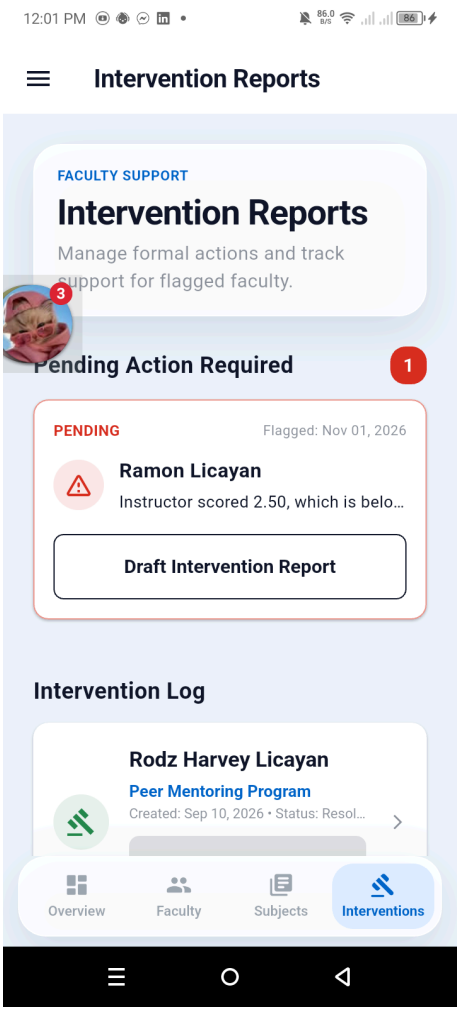
Comments / Attachments (Screenshots, Logs)	Not run: cross-role, needs a filed intervention and a second device. This is the single most important case in the module, because it is the only one that proves the intervention feature actually does its job end to end. Steps 5 and 7 are the integrity checks.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D06	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	RESOLVE AN INTERVENTION [LIVE DATA]	
Revision	updated - resolved from the Log, no confirmation dialog	
Account Needed	DEPT_HEAD + INSTRUCTOR (second device, to observe)	
Preconditions	The pending intervention from TC-D04 exists. The instructor's device is available to observe the effect.	
Test Data	That intervention.	
Steps	1. On the "Interventions" tab, find the TC-D04 record in "Intervention Log". ***Expected:*** Its line reads "Status: Pending" and it offers a green "Mark as Resolved" button.	
	2. Tap "Mark as Resolved". ***Expected:*** The status changes at once - this build asks for NO confirmation. Message reads "Intervention marked as resolved."	
	3. Read the record again. ***Expected:*** It stays in "Intervention Log", now reading "Status: Resolved", and its button reads "Resolved" and is disabled.	
	4. Check "Pending Action Required". ***Expected:*** Unchanged by resolving. The instructor's alert stays suppressed for this term because a report was filed (Pending or Resolved).	
	5. On the INSTRUCTOR's device, observe their dashboard. ***Expected:*** The "Official Notice — Action Required" card is removed. A resolved intervention must not keep demanding action from the instructor.	
	6. Confirm the record still exists in history. ***Expected:*** The row remains in [intervention_reports] with status 'Resolved' and still shows in "Intervention Log". Resolving is not deleting.	
	7. Confirm the instructor still cannot alter it. ***Expected:*** The instructor has no control over the resolved record either.	
	8. Look for a way to reopen the resolved record. ***Expected:*** None in the app. The database also refuses it (TC-D16).	
Expected Result	A pending intervention can be resolved, the instructor's notice clears, and the record is retained in history rather than deleted.	
Actual Result (Pass/Fail)	NOT RUN – Resolving an intervention was not run.	

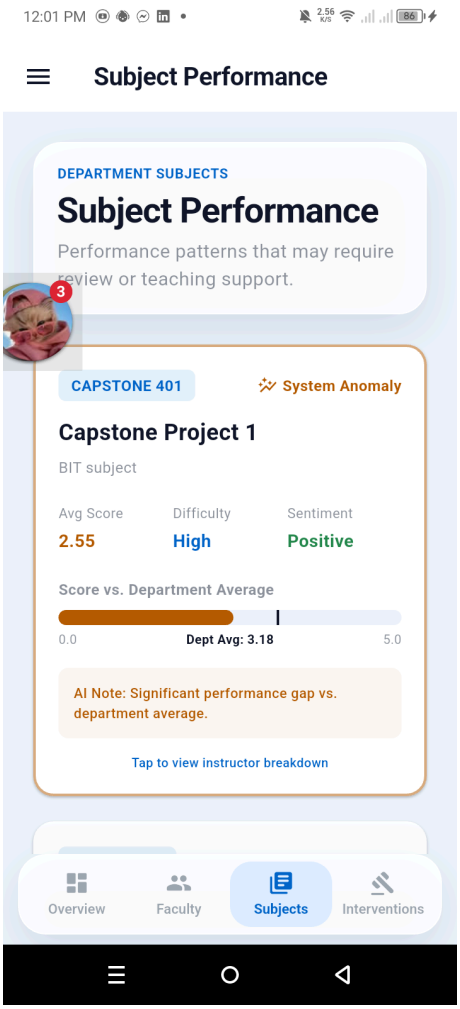
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. Step 6 matters for auditability. A resolved intervention that disappears entirely destroys the department's record of action taken. Step 2: a formal record changes state on a single tap with no confirmation. The previous version of this case expected one; raise it with the team as a usability risk.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D07	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SUBJECT PERFORMANCE - PER-SUBJECT ANALYTICS	
Revision	updated - renamed screen; flags are Difficulty/Sentiment/Gap	
Account Needed	DEPT_HEAD	
Preconditions	Signed in as department head with evaluated subjects in the active term.	
Test Data	View only. RPC [dept_head_subject_analytics] and tables [management_results], [performance_results], [student_remarks]. One subject scoring more than 0.50 below the department average, if available (step 6).	
Steps	1. Open the "Subjects" tab. ***Expected:*** Screen titled "Subject Performance". While loading it reads "Loading subject performance…"; with none it reads "No subject data" and "Analytics will appear after this term receives evaluations."	
	2. Read the page header. ***Expected:*** "Department Subjects" above "Subject Performance", subtitle "Performance patterns that may require review or teaching support.", followed by one card per subject.	
	3. Read one subject card. ***Expected:*** Shows the code and name, an owner tag such as "BSIT subject", three figures "Avg Score", "Difficulty" and "Sentiment", and a bar under "Score vs. Department Average" labelled "0.0", "Dept Avg: x.xx" and "5.0".	
	4. Confirm the subjects listed belong to this department's teaching. ***Expected:*** Each subject is listed because an instructor of THIS department teaches it this term (detail in TC-D12). No subject taught only by another department's instructors appears.	
	5. Read "Difficulty" and "Sentiment" across the subjects. ***Expected:*** Difficulty reads "High" (average below 3.50), "Moderate" (below 4.50) or "Low". Sentiment reads "Positive", "Neutral" or "Critical" (Critical in red) from the remark tones; with no remarks it is derived from the score.	
	6. Find a subject scoring more than 0.50 below the department average. ***Expected:*** Its card has an amber border, a "System Anomaly" badge and the note "AI Note: Significant performance gap vs. department average." Subjects within 0.50 of the average carry no badge.	
	7. Tap a subject card ("Tap to view instructor breakdown"). ***Expected:*** An "Instructor Performance Breakdown" sheet lists each of this department's instructors teaching it, with their score and "N student surveys".	
	8. Cross-check one subject's average against its instructors' scores. ***Expected:*** "Avg Score" equals the mean of the instructors' scores in the breakdown, each being (Management + Performance) / 2 for that class, from [management_results] and [performance_results].	

Expected Result	Subject-level analytics are scoped to the department's own teaching, flag subjects well below the department average, and reconcile with the per-instructor figures.
Actual Result (Pass/Fail)	PARTIAL – Subjects tab showed Subject Performance with CAPSTONE 401 (2.55, difficulty High) and WEBDEV 201 (3.37), each against Dept Avg 3.18.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only; instructor breakdown not opened. Step 6: despite its name, "System Anomaly" marks a score gap of more than 0.50 below the department average, NOT a data fault. The label invites a head to read it as a data problem (or the reverse); confirm the wording with the team. The old flag set ("Curriculum", "Difficulty", "Sentiment", "System Anomaly", "Critical" as separate flags) does not exist in this build.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D08	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	DEACTIVATE AN INSTRUCTOR ACCOUNT [LIVE DATA] [DESTRUCTIVE]	
Revision	updated - new dialog/error text, notice, audit, scope checks	
Account Needed	DEPT_HEAD + SAO_ADMIN (to reactivate, step 11)	
Preconditions	A THROWAWAY instructor account in this department that can currently sign in. Arrange reactivation with an SAO admin beforehand.	
Test Data	That account's credentials, held by the tester. Read access to [audit_logs]. Optional: a REST client signed in as the head for step 10. !! HIGHEST-IMPACT ACTION IN THIS MODULE !! A department head can lock an instructor out of the system. Only an SAO admin can reverse it. Never run this against a real instructor.	

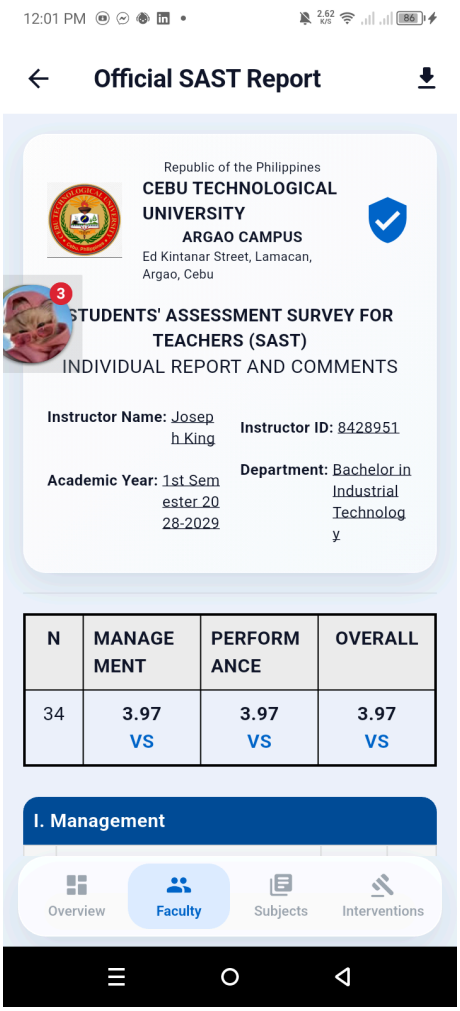
Steps	1. Open a throwaway instructor from the roster and find "Deactivate Account". ***Expected:*** A red outlined "Deactivate Account" button sits under "View Official SAST Report". It only opens a confirmation; nothing changes on a single tap.
	2. Tap it. ***Expected:*** A dialog titled "Deactivate Account?" reads "Are you sure you want to deactivate <instructor name>? They will be permanently locked out of the system.", naming the actual instructor.
	3. Tap "Cancel". ***Expected:*** Nothing changes and the account still signs in.
	4. Turn on airplane mode, open the dialog again and tap "Deactivate". ***Expected:*** Message reads "Could not deactivate this account. Please check your connection and try again." The account is NOT changed.
	5. Restore the network and confirm with "Deactivate". ***Expected:*** Message reads "Account deactivated successfully." and the app returns to the roster, where the instructor shows a "DEACTIVATED" badge (with "Results still counted in this term" if they have results) and the count adds "· 1 deactivated".
	6. Open the deactivated instructor again. ***Expected:*** In place of the button a notice reads "This account is deactivated" and ends "Only the SAO office can reactivate the account."
	7. Attempt to sign in as that instructor. ***Expected:*** Refused with "Your account has been deactivated by the administration." They reach no screen inside the app.
	8. Confirm the instructor's evaluation data survives. ***Expected:*** Scores and remarks are retained and still count in the department average. This is a deactivation, not a deletion.
	9. Confirm the action was recorded. ***Expected:*** [audit_logs] holds a 'USER_STATUS_CHANGED' row by this head for that instructor, visible in the SAO admin's "Security Audit Logs". No audit trail would be a serious accountability gap.
	10. Attempt to deactivate an instructor from ANOTHER department, and another department head. ***Expected:*** Not possible from the app (they are not on the roster). Called directly, the server refuses: the account is not in your department; only the SAO office can deactivate a department head.
	11. Have an SAO admin reactivate the account in User Management. ***Expected:*** Succeeds, and the instructor can sign in again.
Expected Result	A head can deactivate an instructor in their own department behind a named confirmation, the account is then locked out, its data survives, the action is audited, and it can be reversed by an admin.
Actual Result (Pass/Fail)	NOT RUN – Deactivation was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. OPEN QUESTION FOR THE TEAM: this flow still has NO emailed verification code, whereas a head deactivating their OWN account must enter one (TC-D10). Deactivating a colleague is comparably consequential. Confirm whether this is a deliberate design decision; if not, raise it as a defect. Step 11 is mandatory - leave the account as you found it.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D09	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	VIEW AN INSTRUCTOR'S OFFICIAL SAST REPORT	
Revision	updated - renamed "Official SAST Report"; PDF detail in TC-D14	
Account Needed	DEPT_HEAD	
Preconditions	An instructor with evaluation data is open from the roster.	
Test Data	View and export. One instructor with no results this term (step 9).	
Steps	1. From the instructor detail page tap "View Official SAST Report". ***Expected:*** The screen titled "Official SAST Report" opens for THAT instructor (briefly "Preparing official report…").	
	2. Check the header identity fields. ***Expected:*** Under "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST)" and "INDIVIDUAL REPORT AND COMMENTS", "Instructor Name:", "Instructor ID:", "Academic Year:" and "Department:" are filled for the instructor being viewed - not for the head - and long values wrap instead of being cut off.	
	3. Check the "Academic Year:" field specifically. ***Expected:*** It reads the term ONCE, e.g. "2nd Semester 2027-2028". The word "Semester" must NOT appear twice.	
	4. Verify the summary table and both criterion tables. ***Expected:*** "N" / "MANAGEMENT" / "PERFORMANCE" / "OVERALL", then sections "I. Management" and "II. Performance" each listing ten criteria under "No.", "Criteria", "Mean" and "VD", with a "Section Mean: x.xx (<description>)" line under each.	
	5. Read "COMMENTS & FEEDBACK SUMMARY:". ***Expected:*** Shows the AI summary and "Top Feedback Terms" with counts. With no summary it reads "No significant trends identified for this period."	
	6. Cross-check the figures against the instructor detail page. ***Expected:*** The report and the detail page agree.	
	7. Tap the download icon in the app bar. ***Expected:*** A PDF is written and the share sheet opens. Its layout is checked in TC-D14.	
	8. Confirm the report is for the correct term. ***Expected:*** The academic year matches the term the head is reviewing, not a different one.	
	9. Open the report for an instructor with no results this term. ***Expected:*** Reads "No evaluation results yet" and "Results for this term will appear here once evaluation forms have been processed."	
Expected Result	The head can open and export the correct instructor's official report, with identity and term fields rendered correctly in both the screen and the PDF.	
Actual Result (Pass/Fail)	PARTIAL – View Official SAST Report opened the report for Joseph King with header, 34 respondents, Management 3.97 VS, Performance 3.97 VS, Overall 3.97 VS and the criteria table.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only; PDF export not run. Step 3 exists because of DEF-01, found on 31/08/2026 in the instructor module: the report printed "1st Semester Semester 2025-2026". The report screen and PDF builder are SHARED with this role, so the department head path had the same fault. A fix was applied on 31/08/2026 and the screen code still carries it; it has NOT yet been verified on a rebuilt app. Step 3 is the re-test.
Tester Name / Date	
Panelist's Remarks	

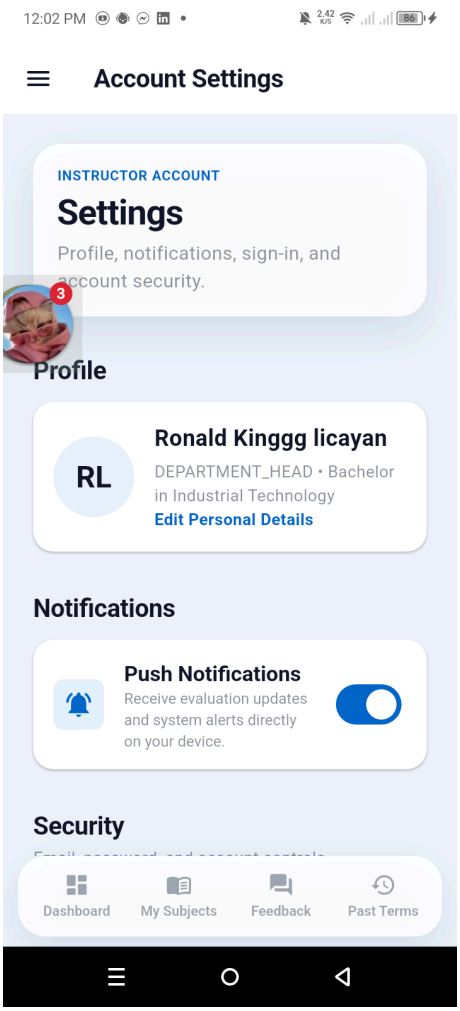
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D10	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	ACCOUNT SETTINGS - PROFILE, ALERTS AND SECURITY	
Revision	updated - renamed "Account Settings"; three toggles; new text	
Account Needed	DEPT_HEAD (with access to the account's inbox)	
Preconditions	Signed in as department head, Settings opened from the drawer. Access to the account's inbox.	
Test Data	A new password of at least six characters and a second email address the tester controls, NOT recorded in this document. QA read access to [user_info] (alert_performance, alert_sentiment, alert_digest) and the n8n execution log.	

Steps	1. Open "Account Settings" from the drawer. ***Expected:*** Screen titled "Account Settings" (briefly "Loading executive settings…"), header "Department Leadership" / "Account Settings" / "Profile, intelligence alerts, and account security.", and an "Executive Profile" card with the name and "<role> • <department>".
	2. Tap "Edit Personal Details", change the name and tap "Save Changes". ***Expected:*** The sheet "Edit Executive Profile" warns that the name must match official school records. Saving shows "Profile updated successfully!" and the new name appears in the drawer header. An empty first or last name is refused with "Please fill in both first and last name."
	3. Find the "Executive Intelligence" section. ***Expected:*** Subtitle reads "Choose which department signals should notify you." with three toggles: "Performance Alerts" ("Alert when instructor rating drops below 3.0."), "Sentiment Analysis" ("Alert on detected negative student feedback.") and "Weekly Digest" ("Receive a summary of department activity.").
	4. Toggle each one off, leave Settings, and return. ***Expected:*** All three persist, and [user_info] shows alert_performance, alert_sentiment and alert_digest as false. A failed save shows NO message in this build (it is only logged).
	5. With "Performance Alerts" ON, arrange for an instructor to fall below 3.0 through a processed batch. ***Expected:*** The head's phone receives a push notification (n8n sends it only when alert_performance is true). The in-app "Action Required" list flags the instructor either way.
	6. With "Performance Alerts" OFF, repeat. ***Expected:*** No push notification is sent, confirming the toggle controls the notification rather than only appearing to.
	7. Tap "Edit Email", submit an address without "@", then your current address, then a valid new address. ***Expected:*** The dialog reads "Enter your new email address. You will receive a confirmation link." The first two are refused with "Please enter a valid email address." and "This is already your current email address."; the last shows "Email updated! Check your inbox for confirmation." The old address works until the link is clicked.
	8. Tap "Edit Password" and submit mismatched passwords. ***Expected:*** The dialog is titled "Change Password". Refused with "Passwords do not match." (a blank field gives "Please fill in all fields."; under six characters gives "Password must be at least 6 characters.").
	9. Submit a valid new password with the WRONG current password. ***Expected:*** Refused with "Current password is incorrect." The password does not change.
	10. Submit a fully valid password change. ***Expected:*** Reads "Password updated successfully. Please log in again for security." and about two seconds later the session ends at the Login screen. On failure it reads "Failed to update password."
	11. Tap "Deactivate My Account", then "Cancel". ***Expected:*** A "Deactivate Account?" dialog warns "Your account will be deactivated and you will no longer be able to access it unless you ask the SAO Admin to reactivate it." and offers "Send Code" to email a confirmation code. Cancelling leaves the account active.
Expected Result	The head can maintain their own profile, the alert toggles genuinely control whether they are notified, and every password rule is enforced.
Actual Result (Pass/Fail)	PARTIAL – Account Settings (in Instructor view) showed Profile, Notifications and Security sections.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only. Edits not run: they change profile or credentials. Steps 5 and 6 are the real test. A settings toggle that saves but changes nothing is a common and easily missed defect. "Weekly Digest" saves alert_digest, but no n8n workflow or app code was found that reads it: as built it changes nothing. Confirm with the team.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D11	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	FORCED PROFILE COMPLETION AFTER SIGN-IN (MISSING ID / ADDRESS)	
Revision	new	
Account Needed	DEPT_HEAD (test account with a blank University ID/address)	
Preconditions	App on the Login screen. An SAO admin, or QA in the SQL editor, has blanked [user_info].university_id and/or address for a TEST department head account. Migration 027 (fill-once ID exception) is applied.	
Test Data	A University ID of 4-30 letters, numbers or hyphens not used by any other account; an ID already used by another account (step 6); a street and a barangay from the seeded list.	

Steps	1. Sign in as the test department head. ***Expected:*** The Department Overview appears first, then a dialog titled "Complete your information" opens over it.
	2. Read the dialog. ***Expected:*** It reads "Your profile is missing your University ID and your address. Please add them to continue. This information is required." Only the missing items are named and only their fields are shown. Buttons: "Log out" and "Save".
	3. Tap outside the dialog, then press the Android back button. ***Expected:*** The dialog stays. It can be left only by saving or by "Log out"; there is no "Later" option any more.
	4. Tap "Save" with the fields empty. ***Expected:*** Refused with field errors: "University ID is required", "House number / street is required" and "Barangay is required".
	5. Enter an ID of three characters, then one containing "#". ***Expected:*** Refused with "University ID must be at least 4 characters" and "University ID must be letters, numbers, or hyphens only".
	6. Enter an ID that another account already uses and save. ***Expected:*** Refused with "This University ID is already registered to another account." Nothing is saved.
	7. Tap "Log out". ***Expected:*** The session ends and the Login screen returns. Signing in again brings the dialog back.
	8. Fill every field with valid values (pick the barangay from the "Barangay, Municipality, Province" list) and tap "Save". ***Expected:*** The dialog closes and "Your information has been saved." appears. [user_info] now holds the ID and the composed address.
	9. Sign out and sign in again. ***Expected:*** No dialog. A complete profile is not asked again.
	10. Use the drawer to "Switch to Instructor View" and back. ***Expected:*** The dialog is not asked again mid-session; role switching does not repeat the check.
Expected Result	A head with a missing ID or address cannot use the app until it is supplied or they log out, the same ID rules as registration apply, and a complete profile is left alone.
Actual Result (Pass/Fail)	NOT RUN – Forced profile completion was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs a head account with a blank ID or address. Account activation by an SAO admin (accounts added during scanning) is not reachable from this role; such a person meets this same dialog on their first sign-in.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D12	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SUBJECTS SCOPED BY THE TEACHING INSTRUCTOR'S DEPARTMENT	
Revision	new	
Account Needed	DEPT_HEAD (A) + DEPT_HEAD of the subject's owning program (B)	
Preconditions	Active term with processed results. Known in advance: an instructor of department A teaching a subject owned by another program (e.g. a BIT instructor teaching a BSIT-owned subject), and if possible a subject co-taught by instructors of A and B.	
Test Data	View only. Tables [instructor_subjects], [subjects] (department_id = owning program), [instructor_departments], [instructor_department_terms]; RPC [dept_head_subject_analytics].	
Steps	1. As head A, open the "Subjects" tab and find the subject owned by the other program. ***Expected:*** It is listed, tagged with the owning program, e.g. "BSIT subject", because an instructor of A teaches it.	
	2. Open its breakdown ("Tap to view instructor breakdown"). ***Expected:*** Only department A's instructors teaching it appear.	
	3. As head B, open the "Subjects" tab. ***Expected:*** The same subject appears for B only if one of B's instructors teaches it, and then B's breakdown lists only B's instructors. Owning the subject alone does not make it appear.	
	4. For a co-taught subject, compare A's and B's "Avg Score". ***Expected:*** Each head's figure is built only from their own instructors' classes, so the two may differ.	
	5. As head A, look for a subject the head personally teaches. ***Expected:*** It is NOT listed; the head's own classes are excluded.	
	6. Look for a subject with no instructor assigned this term. ***Expected:*** It appears for no head.	
	7. Look for a class whose management and performance means are both empty. ***Expected:*** It is skipped, not shown with a score of 0.	
	8. As head A, open the instructor from step 1 on the "Faculty" tab. ***Expected:*** "Subjects This Term" lists the other program's subject too.	
	9. If an instructor changed department between terms, check an earlier term. ***Expected:*** Their classes count for the department they taught for in that term ([instructor_department_terms]), not their current one.	
Expected Result	A subject is shown to the head of the department whose instructor teaches it, with only that department's results, regardless of which program owns the subject.	
Actual Result (Pass/Fail)	NOT RUN – Department scoping was not run.	
Screenshot		

Comments / Attachments (Screenshots, Logs)	Not run: needs an instructor teaching in another department. The department average itself stays per instructor and primary-department only, so it is not recomputed per subject.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D13	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	LOCKED-DOWN REMARKS AND DEPARTMENT VIEWS [CROSS-ROLE]	
Revision	new	
Account Needed	DEPT_HEAD (A) + INSTRUCTOR + SAO_ADMIN; QA with REST access	
Preconditions	Migrations 029, 030 and 033 applied. QA has a REST client (or the Supabase JS client) that can sign in as each account with the app's publishable key.	
Test Data	Read only. Tables/views [student_remarks], [dept_word_cloud], [dept_faculty_active]. The ID of an instructor and of a department that are NOT head A's. A word known to occur only in another department's remarks.	
Steps	1. As head A in the app, read "Department Voice (AI Analysis)". ***Expected:*** The word known to occur only in another department's remarks is absent.	
	2. REST, signed in as head A: select all rows from [student_remarks]. ***Expected:*** Only remarks whose instructor taught for department A in that remark's term are returned.	
	3. Same session: filter [student_remarks] to the other department's instructor. ***Expected:*** 0 rows.	
	4. Same session: select [dept_word_cloud] and [dept_faculty_active] with department_id set to the other department, then with no filter. ***Expected:*** 0 rows for the other department; unfiltered, only department A's rows.	
	5. REST, signed in as the INSTRUCTOR: select from [student_remarks]. ***Expected:*** Only that instructor's own remarks.	
	6. REST with the publishable key only (not signed in): select from [student_remarks], [dept_word_cloud] and [dept_faculty_active]. ***Expected:*** No rows, or permission denied.	
	7. REST, signed in as head A: call [dept_head_subject_analytics]. ***Expected:*** Only department A's instructors' classes; none of the head's own classes.	
	8. REST, signed in as the SAO_ADMIN: select from [student_remarks]. ***Expected:*** All remarks are readable.	
Expected Result	Remarks and department aggregates are readable only by the instructor concerned, the head of the department they teach for, and the SAO admin - never by another department or an anonymous caller.	
Actual Result (Pass/Fail)	NOT RUN – Cross-role views were not run.	
Screenshot		

Comments / Attachments (Screenshots, Logs)	Not run: needs second accounts. This case is the back-end half of the confidentiality promise; TC-D01/5 and TC-D02/8 are the on-screen half. Writes to [student_remarks] (by n8n) are not affected.
Tester Name / Date	
Panelist's Remarks	

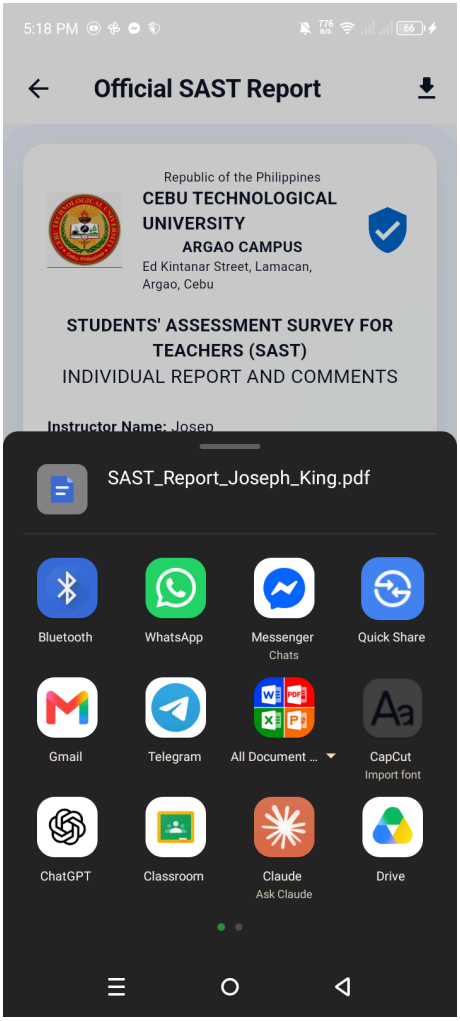
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D14	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	OFFICIAL SAST PDF - TWO FORMATS AND PER-SUBJECT PAGES	
Revision	new	
Account Needed	DEPT_HEAD (SAO_ADMIN optional, to edit signatories in step 7)	
Preconditions	An instructor with results in two or more subjects this term is open from the roster, "Official SAST Report" open.	
Test Data	Export only. Tables [management_results], [performance_results], [instructor_ai_suggestions], [instructor_wordcloud], [report_signatories] (row id 1). An instructor with results but no per-subject rows, if any (step 10).	

Steps	1. Tap the download icon in the app bar. ***Expected:*** The share sheet opens with "SAST_Report_<First>_<Last>.pdf". A second quick tap does not open a second share sheet.
	2. Check the page format. ***Expected:*** Every page is A4 landscape.
	3. Read the first page (format 2, comments). ***Expected:*** Letterhead with the CTU seal and the Bagong Pilipinas logo, "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST)" and "INDIVIDUAL REPORT AND COMMENTS"; fields "Term", "Academic Year", "College" (when known), "Department" and "Name of Faculty" in capitals; an N / MANAGEMENT / PERFORMANCE / OVERALL table.
	4. Read the comments block on that page. ***Expected:*** One flowing paragraph beginning "Integrated with the quantitative ratings (Management = x.xx ...", which folds in the top word-cloud terms, the students' interpretation, "Students particularly appreciated ...", "Areas identified for improvement include ..." and the tone. With no results it reads "No evaluation results yet."
	5. Read the word cloud on that page. ***Expected:*** Titled "Students' Feedback on <Name>'s Performance"; words are packed with no overlaps. With none it reads "No feedback terms yet."
	6. Read the signature block. ***Expected:*** "Prepared by:", "Checked and Verified:" and "Certified Proper and In Order:" with names and titles from [report_signatories] (built-in defaults when the row is empty).
	7. Optional: an SAO admin changes a name in "Report Signatories"; the head downloads the PDF again. ***Expected:*** The new name prints. Restore the original name afterwards.
	8. Read the next page (format 1, overall). ***Expected:*** Titled "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST) INDIVIDUAL REPORT — OVERALL" with "AY 2ND SEM 2027-2028"; "Name of Instructor/Professor", "Course Taught" reading "All subjects (n): CODE1, CODE2", "No. of Student-evaluators", "Campus: ARGAO"; the "RANGE & Verbal Description (VD)" legend; "I. Management" and "II. Performance" tables; "Summary Statistics" with "Management Mean (MM)" and "Performance Mean (PM)"; and "You are a/an" <DESCRIPTION> "General Average x.xx".
	9. Read the remaining pages. ***Expected:*** One format 1 page per subject, without "— OVERALL", with "Course Taught" as "CODE - Subject Name" and that class's own N and means.
	10. Export for an instructor with results but no per-subject rows. ***Expected:*** A single format 1 page after the comments page, without the "— OVERALL" suffix.
	11. Cross-check figures. ***Expected:*** The OVERALL page matches the instructor detail page; each subject page matches that subject on "Subjects This Term". A missing mean prints "—", never 0.00.
Expected Result	The exported PDF follows the university's two official formats: the comments page, then the overall page, then one page per subject, with correct figures and signatories.
Actual Result (Pass/Fail)	PARTIAL – The download icon on the head's Official SAST Report produced SAST_Report_Joseph_King.pdf in the share sheet.

Screenshot	
Comments / Attachments (Screenshots, Logs)	PDF generated but not opened; formats and per-subject pages not checked. The same PDF builder serves the instructor role; a fault here affects both modules.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D15	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	DESCRIPTIVE RATING EQUIVALENTS AND "NO DATA" HANDLING	
Revision	new	
Account Needed	DEPT_HEAD	
Preconditions	Signed in as department head. Results exist for instructors whose stored overall means sit at or near band edges.	
Test Data	View only. [overall_total_survey].combined_score_mean for instructors at or near 3.39 / 3.40 and 4.19 / 4.20 (note the closest values available), and one instructor with no results.	
Steps	1. Open an instructor whose overall is 3.39, then one at 3.40. ***Expected:*** The hero shows "Satisfactory" for 3.39 and "Very Satisfactory" for 3.40. Bands: 4.20-5.00 Outstanding (O), 3.40-4.19 Very Satisfactory (VS), 2.60-3.39 Satisfactory (S), 1.80-2.59 Fair (F), 1.00-1.79 Unsatisfactory (US).	
	2. Repeat for 4.19 and 4.20. ***Expected:*** "Very Satisfactory" and "Outstanding" respectively.	
	3. Open each instructor's "Official SAST Report". ***Expected:*** The VD codes, each "Section Mean: x.xx (<description>)" line and the PDF "You are a/an" line use the same bands as the detail page.	
	4. Read the roster and the subject tiles for the same instructors. ***Expected:*** Scores show two decimals everywhere. The roster's red border marks a score below 3.00 only, not a band.	
	5. Open the instructor with no results. ***Expected:*** The roster shows "—" (not red, sorted last), the detail chips show "—" with "No data", and the PDF prints "—" and "NO DATA".	
	6. Check that a blank answer is not counted as zero. ***Expected:*** A mean shown in the app equals the stored mean in [management_results] / [performance_results], which excludes blank answers.	
Expected Result	Every screen and the PDF give the same descriptive equivalent for the same mean, and a missing mean is shown as missing, never as 0.	
Actual Result (Pass/Fail)	PARTIAL – Rating equivalents showed in the instructor detail (Very Satisfactory) and on the report (VS).	
Screenshot		
Comments / Attachments (Screenshots, Logs)	Partial only; no-data handling not checked. All bands come from one shared rating utility, so a fault in one place is likely to appear everywhere.	
Tester Name / Date		

Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D16	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	INTERVENTION EMAIL SENT ONCE AND WRITE RULES [CROSS-ROLE, LIVE DATA]	
Revision	new	
Account Needed	DEPT_HEAD + INSTRUCTOR (inbox access) + QA SQL/REST access	
Preconditions	Migration 028 applied and send-intervention-email deployed. A flagged throwaway instructor of this department whose inbox the tester can read.	
Test Data	One new intervention (or the one filed in TC-D04, read within ten minutes). Tables [intervention_reports] (emailed_at), [audit_logs]. An instructor of ANOTHER department (step 6).	
Steps	1. File an intervention for the throwaway instructor (as in TC-D04). ***Expected:*** "Intervention recorded successfully."	
	2. Open the instructor's inbox. ***Expected:*** ONE email from "iEvaluate System" titled "⚠ Official Notice: Intervention Report Issued", greeting the instructor by first name, naming this head, with "Action Required: <action>", "Notes: <notes>" and "Status: Pending".	
	3. Check [intervention_reports] and [audit_logs]. ***Expected:*** emailed_at is set on the new row, and [audit_logs] has one 'INTERVENTION_EMAIL_SENT' row by this head for that report.	
	4. Pull to refresh the Interventions tab, re-open it, and resolve the report. ***Expected:*** No second email arrives. Resolving sends no email.	
	5. Staging only: with the email provider disabled, file another report. ***Expected:*** The report is still saved and the success message still shows; emailed_at stays empty so a later retry can send it.	
	6. REST, signed in as the head: insert a report for the other department's instructor, and one for the head themselves. ***Expected:*** Both refused by row-level security.	
	7. Same session: change action_type or notes of the head's own report. ***Expected:*** Refused with "Only the status of an intervention report can be changed."	
	8. Same session: set a Resolved report back to 'Pending'. ***Expected:*** Refused (a Resolved report cannot be reopened).	
Expected Result	Each intervention emails the instructor exactly once, the send is recorded in emailed_at and the audit log, and the database only lets the filing head mark a report Resolved.	
Actual Result (Pass/Fail)	NOT RUN – Intervention email case was not run.	
Screenshot		

Comments / Attachments (Screenshots, Logs)	Not run: cross-role, needs a filed intervention and an inbox. An email failure never blocks the report itself; it is logged on the device only.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC-D17	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	SWITCH TO INSTRUCTOR VIEW - OWN STUDENT FEEDBACK	
Revision	new	
Account Needed	DEPT_HEAD who also teaches classes with results this term	
Preconditions	Signed in as department head. The head's own classes have processed remarks and an AI summary for the active term.	
Test Data	View only. Tables [instructor_ai_suggestions] (student_interpretation, positive_themes, improvement_insights), [instructor_wordcloud], [student_remarks] for the head's own user ID.	
Steps	1. Open the drawer and tap "Switch to Instructor View". ***Expected:*** A transition reads "Switching to Instructor", then the instructor tabs appear: "Dashboard", "My Subjects", "Feedback", "Past Terms".	
	2. Open the "Feedback" tab. ***Expected:*** Titled "Student Feedback" with "Student Voice" and "Sentiment, recurring themes, and individual comments."	
	3. Read "AI Instructor Insights" - "What Your Students Are Saying". ***Expected:*** Labelled "AI-generated interpretation", it shows the stored student_interpretation as one paragraph, with "Based on N comments". When that is empty it falls back to the AI suggestion, else "No AI interpretation available yet."	
	4. Read "Key Positive Themes" and "Improvement Insights". ***Expected:*** Subtitles "Consistently praised aspects of your teaching" and "Areas flagged in student feedback worth reviewing". Each point is one bullet; an older one-paragraph value shows as a single item and is never split at commas. A card with nothing to show is hidden.	
	5. Read "AI Word Cloud". ***Expected:*** Words are packed with no overlaps, the most frequent in the strongest brand blue. With none it reads "No feedback data yet for this term."	
	6. Cross-check steps 3-4 against [instructor_ai_suggestions]. ***Expected:*** The text matches the stored values for the head's own ID.	
	7. Open the drawer and tap "Return to Department Head". ***Expected:*** The department head tabs return, with no profile dialog and no second sign-in.	
Expected Result	A head can review their own teaching feedback through the instructor view, with the interpretation, insight cards and word cloud reflecting the stored AI results.	
Actual Result (Pass/Fail)	PARTIAL – Switch to Instructor View opened My Dashboard for the head: 3.97 Very Satisfactory, Management 3.97, Performance 3.96, 153 evaluations, Current Classes.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only; return to the head view worked. The head's own classes are excluded from the Subjects tab (TC-D12/5); this view is where they are reviewed.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SUMMARY

```
Total cases     : 17
Executed        : 0
Not executed    : 17

Revision status : 1 unchanged (TC-D05), 9 updated (TC-D01-D04, D06-D10),
                  0 removed, 7 new (TC-D11 to D17)

Cases that change live data : TC-D04, D05, D06, D08, D16
Destructive on shared data  : TC-D08 (deactivates an account)
Highest-risk case           : TC-D08 (deactivating an instructor)
Cross-role cases            : TC-D05, D16 (second device / inbox),
                              TC-D08 (SAO admin reactivates),
                              TC-D13 (instructor, SAO admin, REST)

ACCOUNTS AND TEST DATA NEEDED
  - DEPT_HEAD with a department, ID and address, who also teaches classes
  - a second DEPT_HEAD (another program) and one with NO department
  - a test DEPT_HEAD with a blank University ID / address (TC-D11)
  - a THROWAWAY instructor in the head's department, inbox readable
  - an INSTRUCTOR and an SAO_ADMIN; QA SQL/REST access
  - results near band edges and one instructor with no results

WHAT THIS DOCUMENT EXISTS TO PROVE
  1. A head sees ONLY their own department      (TC-D01/5, D02/8, D12, D13)
  2. A head cannot reach any SAO Admin screen   (TC-D01/2)
  3. Head and instructor agree on the same scores   (TC-D03/3, D15)
  4. An intervention reaches the instructor live    (TC-D05/1,2, D16/2)
  5. An instructor cannot remove an intervention    (TC-D05/5)
  6. A resolved intervention is kept, not deleted   (TC-D06/6)
  7. Deactivating an instructor is confirmed,
     audited, scoped, and reversible                (TC-D08)
  8. Alert toggles actually change behaviour        (TC-D10/5,6)
  9. The official PDF follows both formats          (TC-D14)

Items 1 and 2 are confidentiality. Items 4 to 6 decide whether the
intervention feature works at all. Item 7 is accountability. Treat failures
in those ahead of anything cosmetic.

OPEN QUESTIONS FOR THE TEAM, all raised in the cases above:
  a) TC-D08 - a department head can deactivate an instructor with no emailed
     verification code, while deactivating their own account needs one.
     Is that asymmetry intended?
  b) TC-D01 - "Department Voice (AI Analysis)" is subtitled "across the
     college" on a department-scoped screen. Is the wording wrong?
  c) TC-D01 - alerts use the department average as the threshold, but the
     alert text says "below the strict 3.0 benchmark".
  d) TC-D02 - the empty-state hint mentions university ID; search does not.
  e) TC-D06 - "Mark as Resolved" has no confirmation.
  f) TC-D07 - "System Anomaly" marks a score gap, not a data fault.
  g) TC-D10 - "Weekly Digest" is saved but nothing reads it.

CARRIED OVER FROM THE INSTRUCTOR UAT
  DEF-01 (the word "Semester" printed twice on the official report) affected
  this role too, because the report screen and PDF builder are shared. A fix
  was applied on 31/08/2026 but is NOT yet verified on a rebuilt app.
  TC-D09 step 3 is the re-test for this role.
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SIGN-OFF

Tester : _____ Date: _____

QA Engineer : Mark Lawrence Medillo _____ Date: _____

Project Leader : Rodz Harvey Licayan _____ Date: _____

PANELIST'S REMARKS

_____

_____

_____

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

iEvaluate - Department Head Module UAT - Team ERMM Cebu Technological University, Argao Campus

Instructor

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

USER ACCEPTANCE TESTING - INSTRUCTOR MODULE

```
Revised 2026-11-01 for app build of 2026-10-28 (commit 926b836)
  - Every case now carries a "Revision" line and an "Account Needed" line.
  - TC001-TC008 updated to current labels and behaviour; old 31/08/2026
    results moved to Comments. No case removed.
  - New TC009-TC014: forced profile completion, student interpretation and
    packed word cloud, two-format official SAST PDF, rating equivalents,
    placeholder-account activation, registration with college picker.
  - Means with no answers now show as "—" / "N/A" / "No data", never 0.00.
  - Destructive cases are marked [DESTRUCTIVE] (TC008, TC013); run them last.
  - SAST Guidelines screen checked: not reachable by an Instructor.
================================================================================
CEBU TECHNOLOGICAL UNIVERSITY - ARGAO CAMPUS
COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department
USER ACCEPTANCE TESTING - INSTRUCTOR MODULE
================================================================================
Capstone Project Title : iEvaluate: An AI-Driven Mobile Instructor Evaluation
                         and Performance Analysis System Using N8n Workflow
                         Automation
Team                   : ERMM
Project Leader         : Rodz Harvey Licayan
Front-End Programmer   : Michael Thomas Gonzaga
QA Engineer            : Mark Lawrence Medillo
Technical Writer       : Evangeline Caruana
Execution date         : previous run 31 August 2026; NEW RUN PENDING on the
                         2026-10-28 build
Build                  : previous run debug, Flutter 3.41.6; new run on the
                         build of 2026-10-28 (commit 926b836, branch main)
Device                 : Infinix X6525, Android 13 (API 33) (previous run)
Package                : com.example.ievaluateapp_final
Active term            : 2nd Semester, 2027-2028 (previous run)
Test account role      : Instructor (plus SAO Admin / Department Head where a
                         case says so under "Account Needed")
--------------------------------------------------------------------------------
HOW TO READ THIS DOCUMENT
--------------------------------------------------------------------------------
* Text in "double quotes" is text that appears on screen exactly as written.
  Match it character for character when testing.
* Table names in [square brackets] are database tables or edge functions to
  check when a step calls for back-end verification.
* Every step carries its own expected result, so a failing case identifies
  WHICH step failed instead of one verdict for the whole scenario.
* "Revision" says how the case changed for the 2026-10-28 build: unchanged,
  updated (with what changed), removed, or new.
* "Account Needed" names every account the case uses. [DESTRUCTIVE] in a
  title means the case changes the shared database in a way that cannot be
  undone by the tester alone: run it last, on a disposable account.
* "Actual Result" is blank until the case is run on the 2026-10-28 build.
  Results from the 31 August 2026 run of an older build are kept in
  "Comments", prefixed "Old run (31/08/2026, older build):".
* A mean with no answers behind it is shown as "—" (or "N/A" on score
  badges, "No data" as a verbal description), never as 0.00.
* One case per screen or flow. Where a screen has both a read path and a write
  path, both live in the same case, with the write steps marked so they can be
  left for last.
--------------------------------------------------------------------------------
SCREEN COVERAGE
```

```
--------------------------------------------------------------------------------
Every screen an instructor can reach has a case. The last column is the
31 August 2026 run on the older build; the new run is pending.
  SCREEN                        REACHED BY                     CASE       31/08
  ----------------------------- ------------------------------ ---------- ------
  Login                         App launch, no session         TC001      partly
  Complete your information     After sign-in, when the ID or  TC009      new
  (forced dialog)               address is missing
  My Dashboard                  Tab "Dashboard"                TC002,012  partly
  My Subjects                   Tab "My Subjects"              TC003      yes
  Subject Detail                Tap any subject card           TC003      yes
  Student Feedback              Tab "Feedback"                 TC004,010  yes
  Past Terms                    Tab "Past Terms"               TC005      yes
  Official SAST Report          "View Official SAST Report"    TC006      yes
                                or "Full Term Report"
  Official SAST PDF             Download icon on the report    TC006,011  yes
  Account Settings              Drawer "Account Settings"      TC007      partly
  Sign-out / deactivation       Settings or drawer             TC008      no
  Activate account (SAO side)   SAO Admin "Users" tab menu     TC013      new
  Registration                  Login "Register"               TC014      new
  SAST Guidelines               NOT REACHABLE BY INSTRUCTOR    none       n/a
                                (SAO Admin and SAO Staff only)
  Term Subjects                 NO ENTRY POINT EXISTS          none       n/a
                                (dead code, see DEF-07)
WHAT WAS DELIBERATELY NOT EXECUTED (31 AUGUST 2026 RUN, OLDER BUILD)
  Every step that writes to or locks the live account was left for the tester:
    - profile, email and password edits   (TC007 steps 4-11)
    - deactivation with the emailed code  (TC008 steps 7-11)
    - sign-out and session clearing       (TC008 steps 1-6)
  The sign-in failure paths in TC001 steps 5-9 were also skipped, because
  repeating a wrong password trips a real lockout on a working account.
WHAT THE NEW RUN WRITES (2026-10-28 BUILD) - PLAN BEFORE RUNNING
  [DESTRUCTIVE], run last and only on disposable accounts:
    - TC008 steps 7-11  self-deactivation; bans the login until an SAO admin
                        approves it again (TC013 step 9)
    - TC013 steps 5-9   activates and approves a placeholder account, and
                        re-approves a disabled one
  Writes to a live record, not destructive:
    - TC002 step 8      department head raises a real intervention notice;
                        the instructor is emailed
    - TC007 steps 4-11  profile, email and password edits
    - TC009 steps 6-10  saves a University ID and address
    - TC014 step 9      creates a pending account; SAO admin rejects it after
  Avoid on a working account:
    - TC001 steps 5-9   repeated wrong passwords trip the attempt limit
```

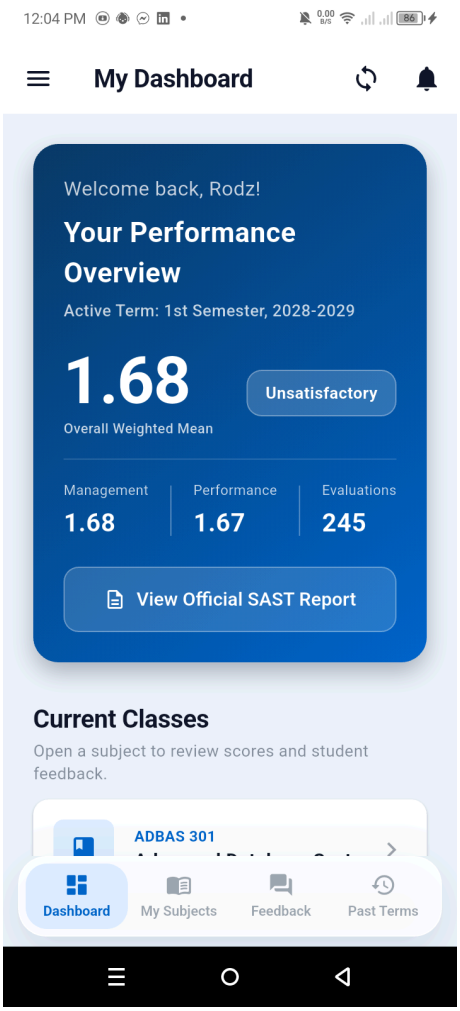
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC001	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**SIGN-IN: VALID CREDENTIALS AND FAILURE PATHS** Instructor authenticates and reaches the dashboard, and every invalid path is refused	
Revision	updated - profile dialog may follow sign-in; exact refusal messages for wrong and deactivated logins	
Account Needed	Instructor (ACTIVE, ID and address on file); one deactivated Instructor for step 8	
Preconditions	App installed and launched. No session active, so the Login screen is shown. Account is ACTIVE and has the Instructor role. Its University ID and address are on file, so the "Complete your information" dialog (TC009) does not interrupt step 4.	
Test Data	Institutional email or University ID of the instructor account. Password held by the tester, deliberately NOT recorded in this document. One deactivated instructor account for step 8 (for example the one left by TC008). Access to the account's inbox for step 9.	
Note	Step 7 trips the attempt limit. Run steps 5-9 last, or on a throwaway account.	

Steps	1. Launch the app and wait for the splash screen to resolve. ***Expected:*** Login screen appears, headed "iEvaluate Portal" with subtitle "Secure access to academic evaluation tools."
	2. Enter the university ID or institutional email, then the password, and tap the eye icon at the right of the password field. ***Expected:*** First field's placeholder reads "University ID or Institutional Email". Password is masked by default; the eye reveals it and tapping again re-masks it.
	3. Tick "I agree to the NDA and DPA", then tap the information icon beside it. ***Expected:*** Checkbox ticks. The icon (tooltip "Read agreements") opens a dialog titled "NDA & DPA Agreements", closed with "Close".
	4. Tap "Sign In". ***Expected:*** Authentication succeeds and the app routes to "My Dashboard", with the bottom tabs Dashboard, My Subjects, Feedback and Past Terms. No other role's dashboard is shown. No "Complete your information" dialog appears for this account.
	negative paths below; run last 5. Sign out. Leave both fields empty, tick the NDA box, tap "Sign In". ***Expected:*** Refused with "Please enter your ID/email and password."
	6. Fill valid credentials but leave "I agree to the NDA and DPA" unticked. ***Expected:*** Refused with "Please agree to the NDA and DPA to log in." No session is created.
	7. Enter a valid email with an incorrect password and sign in once, then repeat until the attempt limit trips. ***Expected:*** The first attempt fails with "Incorrect ID or password. Please try again." and the typed email is not cleared. The limit then blocks with "Too many failed attempts. Please wait Xm Ys before trying again." carrying a live countdown.
	8. Sign in with the credentials of a DEACTIVATED instructor account. ***Expected:*** Denied. A deactivated login is banned in Auth, so the message is "This account has been suspended. Please contact the SAO office." (an account marked disabled but not banned shows "Your account has been deactivated by the administration."). The dashboard is never reached.
	9. Tap "Forgot Password?", complete the reset ("Reset Password", "Send Code", "Enter Code", "Verify Code", "Set New Password", "Update Password"), return and sign in with the new password. ***Expected:*** Login screen shows "Password updated successfully! Please log in with your new password." and the new password is accepted.
Expected Result	A valid instructor reaches My Dashboard; every invalid path is refused with its own specific message; and a deactivated account cannot reach any instructor screen.
Actual Result (Pass/Fail)	PARTIAL – Valid instructor credentials led to My Dashboard greeting 'Welcome back, Rodz!' with Active Term 1st Semester, 2028-2029.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Steps 1-4 only. Steps 5-9 not run: failure paths risk locking a working account. Old run (31/08/2026, older build): PASS on steps 1-4. Login screen rendered as specified; after sign-in the app landed on "My Dashboard" greeting "Welcome back, Rodz!" Steps 5-9 NOT EXECUTED - would lock out a working account.
Tester Name / Date	
Panelist's Remarks	

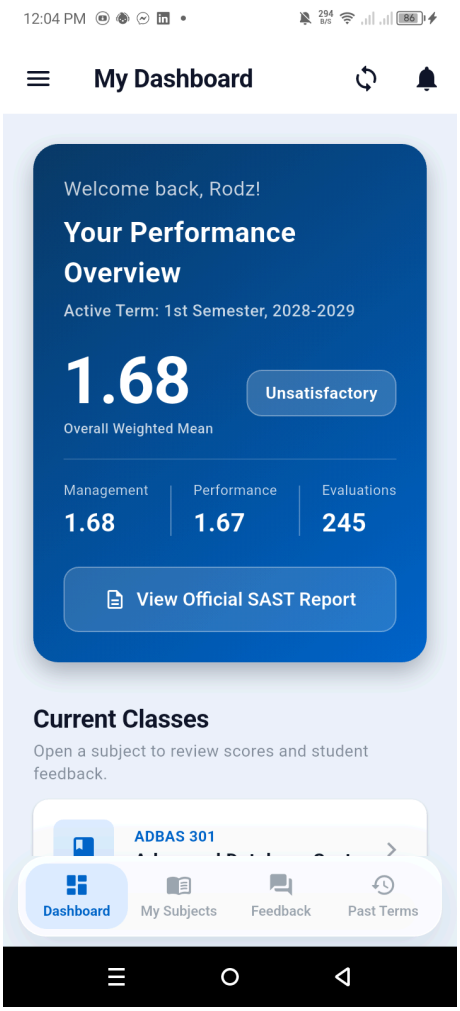
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC002	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**MY DASHBOARD: SCORES, SYNC, NOTICES AND TERM REACTIVITY** Dashboard shows the instructor's own scores for the active term, and reacts to sync, notices and a term change	
Revision	updated - no-data shows "—"; stored values only; intervention notice is also emailed	
Account Needed	Instructor; Department Head of the same department (step 8); SAO Admin (step 9); optionally a second Instructor with no results this term (step 2)	
Preconditions	Signed in as instructor with at least one subject assigned in the active term. For steps 8-9, a second device signed in as SAO admin, and a department head able to raise an intervention notice.	
Test Data	View only except step 8. Cross-check [overall_total_survey] (combined_score_mean, management_mean, performance_mean, total_responses), [intervention_reports], [system_settings.current_term_id]. The instructor's inbox for step 8.	

Steps	1. Observe the hero card at the top of "My Dashboard". ***Expected:*** Shows "Welcome back, {FirstName}!", "Your Performance Overview", and "Active Term:" followed by the term set by the SAO admin.
	2. Read the large score and the badge beside it. Repeat once with an instructor who has no stored result for the active term. ***Expected:*** The number is the stored overall mean to two decimals, labelled "Overall Weighted Mean". The badge matches the band: >=4.20 Outstanding, >=3.40 Very Satisfactory, >=2.60 Satisfactory, >=1.80 Fair, >=1.00 Unsatisfactory. With no stored result the number reads "—", the label reads "No evaluation results yet", no badge is drawn, and Management and Performance read "—" - never 0.00.
	3. Compare "Management", "Performance" and "Evaluations" against [overall_total_survey] for this instructor and term. ***Expected:*** Management and Performance equal management_mean and performance_mean; Evaluations equals total_responses; the large number equals combined_score_mean, i.e. (Management + Performance) / 2. Nothing is recomputed from raw forms.
	4. Scroll to "Current Classes", then tap any subject card. ***Expected:*** Subtitle reads "Open a subject to review scores and student feedback." Every subject assigned for the active term is listed with code and name, and no subject from another term appears. Tapping a card opens Subject Detail for that subject.
	5. Scroll to the bottom two columns. ***Expected:*** "Growth" shows a bar per recent term (a term with no stored result prints "—" and draws no bar); "Recent Feedback" lists up to five latest remarks, or "No feedback yet" when there are none.
	6. Tap the sync icon in the app bar (tooltip "Manual Sync"), then pull down on the dashboard body to refresh. ***Expected:*** The icon becomes a disabled spinner while running, then a snackbar reads "Dashboard and local results synced successfully". The pull refresh runs the same sync with the same outcome.
	7. Tap the bell icon while there are no active notices. ***Expected:*** Green snackbar reads "No active intervention notices from your department head." (after a tick emoji) and no badge is drawn on the bell.
	8. Have the department head raise an intervention notice, then observe the dashboard WITHOUT restarting the app, try to dismiss the notice, and check the instructor's inbox. ***Expected:*** A red count badge appears on the bell and a card headed "Official Notice — Action Required" appears at the top, showing "From:", "Action:" and "Notes:". No dismiss control exists - a lock icon carries the tooltip "Only your department head can remove this notice". An email with the subject "Official Notice: Intervention Report Issued" arrives in the instructor's inbox.
	9. While the dashboard is open, have the SAO admin switch the active term. ***Expected:*** The dashboard reloads on its own and "Active Term:" plus every figure updates, without a manual restart.
Expected Result	The dashboard presents this instructor's own stored active-term scores, every figure reconciles with [overall_total_survey], missing results show as "—" rather than 0.00, notices are read-only and emailed, and a term change propagates without a restart.
Actual Result (Pass/Fail)	PARTIAL – My Dashboard showed 1.68 Unsatisfactory overall weighted mean, Management 1.68, Performance 1.67, 245 evaluations, View Official SAST Report and Current Classes.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only. Old run (31/08/2026, older build): PASS on steps 1-5. Observed 2.99 / "Satisfactory", Management 3.00, Performance 2.99, Evaluations 50, active term "2nd Semester, 2027-2028", with "IAS 301" under Current Classes. The band correctly matches the 2.60-3.39 rule. Steps 6-9 NOT EXECUTED - need a second SAO admin session and a department-head notice.
Tester Name / Date	
Panelist's Remarks	

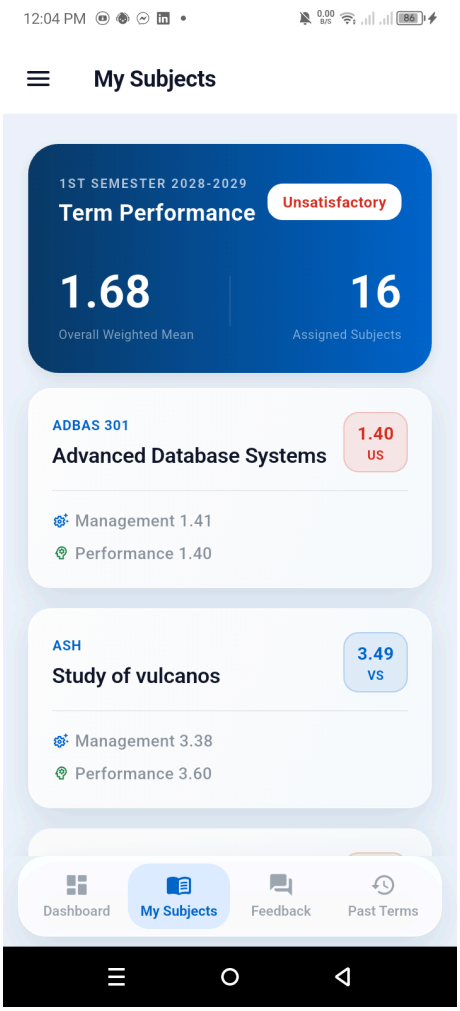
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC003	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**MY SUBJECTS AND SUBJECT DETAIL** Assigned subjects for the term, and the criterion breakdown and comments for one subject	
Revision	updated - "—" for blanks; "x of y answered" counts; empty state; one card per class record	
Account Needed	Instructor	
Preconditions	Signed in as instructor with subjects assigned in the active term, at least one carrying recorded evaluations.	
Test Data	View only. Cross-check [instructor_subjects], [management_results] m1-m10 (and m1_count..), [performance_results] p1-p10, [student_remarks]. Ideally: one subject with no processed forms, one with some criteria left blank on every form, and one subject code with two class records this term.	

Steps	1. Tap the "My Subjects" tab and read the summary header. ***Expected:*** Screen opens titled "My Subjects". The header shows the term label, "Term Performance", the verbal-description pill, the value under "Overall Weighted Mean", and a count under "Assigned Subjects". With no stored term result the value reads "N/A" and the pill "No data".
	2. Compare the "Assigned Subjects" count with the number of subject cards and with [instructor_subjects]. ***Expected:*** All three agree. No subject belonging to another instructor or another term is listed.
	3. Inspect one subject card, then compare the header's term value with the dashboard. ***Expected:*** The card shows the subject code in capitals, the subject name, a score badge with the mean to two decimals and its code (O / VS / S / F / US), or "N/A" with no code when the subject has no answers, plus "Management" and "Performance" mini-metrics ("—" when missing). The header value matches the dashboard's.
	4. Pull down to refresh, then tap a subject card. ***Expected:*** The list reloads without error, and the card opens Subject Detail with the subject code as the app-bar title and a back arrow; the header shows the code above the subject name and "N total respondents". If that code has more than one class record this term, a note reads "Showing the most recent of N class records for {CODE}."
	5. Read the three summary cards on Subject Detail, then open a subject with no processed forms. ***Expected:*** "Management", "Performance" and "Overall Weighted Mean" are shown, the third also carrying its verbal description. The subject with no forms shows "No evaluation results yet" with "Scores for this subject will appear here once its evaluation forms have been processed." and no tables.
	6. Expand and collapse "I. Management Breakdown". ***Expected:*** Section starts expanded and toggles on tap with the arrow rotating. Table columns are "No." / "Criteria" / "Mean" / "VD" across all ten SS Form 2 management criteria. Under each mean a small line reads "x of y answered" (omitted for older rows); a criterion nobody answered shows "—" with VD "-".
	7. Expand "II. Performance Breakdown" and verify each mean against the database. ***Expected:*** All ten performance criteria are listed and every mean matches p1_mean-p10_mean for this subject and term.
	8. Scroll the "Per-Question Visualization" chart sideways. ***Expected:*** Twenty bars labelled "M1"-"M10" and "P1"-"P10", each printing its score, each matching the tables above. A question with no answers prints "—" and draws no bar.
	9. Under "Student Feedback", apply each chip - "All", "Positive", "Neutral", "Critical" - including one tone with no comments for this subject. ***Expected:*** The counter reads "{filtered} of {total}" and updates per chip. Only remarks of the selected tone remain, and only for this subject. An empty tone reads "No {tone} feedback for this subject." in lower case, e.g. "No critical feedback for this subject."
	10. Cycle the sort dropdown through all four options. ***Expected:*** "Date (Newest)", "Date (Oldest)", "Sentiment (Positive First)" and "Sentiment (Critical First)" each reorder correctly, and the sort survives changing the chip.
Expected Result	Every assigned subject is listed with stored scores that reconcile with the dashboard, unanswered values show as "—" or "N/A", and for one subject both criterion tables, the twenty-bar chart and the filtered comments agree with the stored results.
Actual Result (Pass/Fail)	PARTIAL – My Subjects showed 1ST SEMESTER 2028-2029 term performance 1.68, 16 Assigned Subjects and subject cards with 2-decimal scores and verbal ratings.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Subject detail not opened. Old run (31/08/2026, older build): PASS on steps 1, 3, 4, 5, 6, 8 and the filter half of step 9. MY SUBJECTS: header showed "2ND SEMESTER 2027-2028", "Term Performance", the "Satisfactory" pill, 2.99 overall and 4 assigned subjects, matching the dashboard exactly. Both spot-checked bands are correct: "IAS 301" at 3.55 VS (Mgmt 3.70 / Perf 3.40) and "NETWORK 202" at 3.03 S (3.00 / 3.06). SUBJECT DETAIL: opened "CAPSTONE 401" from a HISTORICAL term. Header read "Capstone Project 1" / "26 total respondents"; cards showed Management 3.04, Performance 3.02, Overall 3.03 "Satisfactory" - matching the Past Terms card exactly, so historical scoping is correct. Both breakdowns render with No./Criteria/Mean/VD and the correct SS Form 2 wording, and the collapse toggle works (Management collapsed on tap, arrow flipped). The per-question chart renders with M1-M9 visible and scrolls for the rest. Feedback showed "3 of 3" with chips "All 3" / "Positive 0", sort defaulting to "Date (Newest)", and tone-coloured cards. Step 2 needs the database cross-check; the empty-tone half of step 9 and step 10 not executed. MINOR: long subject names truncate on the card, e.g. "Information Assurance and..."; "Overall Weighted M..." truncates in the Subject Detail summary card.
Tester Name / Date	
Panelist's Remarks	

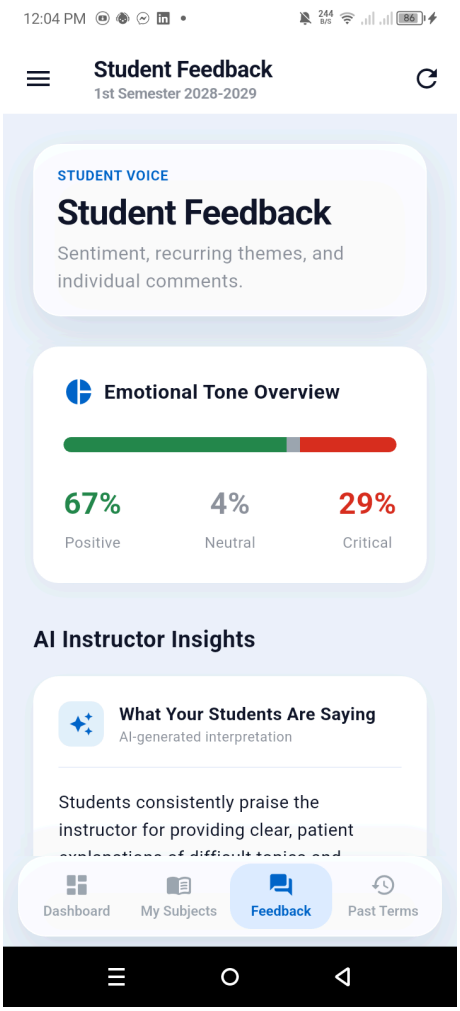
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC004	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**STUDENT FEEDBACK: TONE, AI INSIGHTS, WORD CLOUD AND QUOTES *** FAIL - DEF-02 (FIXED, AWAITING RE-TEST) ***** Sentiment split, AI-generated interpretation, word cloud legibility and all quote filters	
Revision	updated - new header; student interpretation; bullet insight cards; fixed packed word cloud	
Account Needed	Instructor; a second Instructor with no AI row for the term (step 6)	
Preconditions	Feedback screen reachable, and the active term has processed student remarks across at least two subjects and more than one tone.	
Test Data	View only. Verify against [student_remarks], [instructor_ai_suggestions] (most recent row by updated_at) and [instructor_wordcloud] (up to 200 by count), matched on instructor ID and term ID.	

Steps	1. Tap the "Feedback" tab. ***Expected:*** Two-line app-bar title, "Student Feedback" above the active term, with a refresh icon (tooltip "Refresh"). The page header reads "Student Voice" above "Student Feedback", with subtitle "Sentiment, recurring themes, and individual comments."
	2. Inspect "Emotional Tone Overview". ***Expected:*** A segmented bar plus three percentages labelled "Positive", "Neutral", "Critical". The three add up to 100% (rounding aside), and the bar segment widths match the percentages.
	3. Count the tone values in [student_remarks] for this instructor and term, and compare. ***Expected:*** Each on-screen percentage equals its share of the stored tone values. The comment total matches the Direct Quotes counter.
	4. Read "What Your Students Are Saying" under "AI Instructor Insights". ***Expected:*** Sub-label reads "AI-generated interpretation". The paragraph matches [instructor_ai_suggestions.student_interpretation] for this instructor and term (ai_suggestion only when that is empty - see TC010). It is NO LONGER the paragraph printed under the report's "COMMENTS & FEEDBACK SUMMARY:", which shows ai_suggestion. The pill at the foot reads "Based on N comments" with N equal to the actual comment count.
	5. Compare "Key Positive Themes" and "Improvement Insights" against the database. ***Expected:*** Each card has its subtitle ("Consistently praised aspects of your teaching" / "Areas flagged in student feedback worth reviewing") and a tinted box listing the points as bullets, one per stored line of positive_themes / improvement_insights. Nothing is invented, and either card is hidden when its column is empty.
	6. Sign in as an instructor whose AI row has not been generated yet. ***Expected:*** The screen still renders. The interpretation area reads "Analyzing your feedback..." (no row) or "No AI interpretation available yet." (row with empty text), never another instructor's content, and does not crash.
	7. Scroll to "AI Word Cloud", read every word in the panel, then pull to refresh twice and read it again. ***Expected:*** EVERY WORD SHOWN IS FULLY VISIBLE AND LEGIBLE. No word is clipped at any edge of the dark panel, including rotated words. Words are packed from the centre, larger for higher counts in [instructor_wordcloud], in white and light brand tints. The arrangement is FIXED: refreshing gives the same layout (no reshuffle). With no words the panel reads "No feedback data yet for this term."
	8. Scroll to "Direct Quotes" and read the counter beside the heading. ***Expected:*** Counter reads "N Comments", is fully on screen and not cut off at the right edge, and equals the number of quote cards below.
	9. Tap each tone chip in turn, then open the subject dropdown and pick each entry, then combine a tone chip with a subject selection. ***Expected:*** Each chip carries a count badge, the list narrows to that tone, the counter updates, and the badge counts sum to the "All" count. The dropdown's first entry is "All Subjects", followed by every subject code found in the remarks, sorted A-Z. The two filters apply TOGETHER, not one replacing the other, and the counter reflects the combined result.
	10. Cycle the sort dropdown through all four options, then choose a filter combination with no matching comments. ***Expected:*** "Date (Newest)" is the default. "Date (Oldest)", "Sentiment (Positive First)" and "Sentiment (Critical First)" each reorder correctly, and the sort holds while filters change. An empty combination replaces the list with "No comments match this filter." and no stale quote cards remain.
	11. Inspect one quote card. ***Expected:*** Shows the subject-code pill, the date as YYYY-MM-DD, the remark in italics inside quotation marks, and a tone icon with its label. The card border colour matches the tone.
Expected Result	Tone percentages match the stored remarks, every AI-generated element traces back to this instructor's own row, all word-cloud words are legible and stay put on refresh, and the tone, subject and sort controls filter correctly alone and combined.
Actual Result (Pass/Fail)	PARTIAL – Student Feedback showed Emotional Tone Overview (67% Positive, 4% Neutral, 29% Critical) and an AI Instructor Insights interpretation.

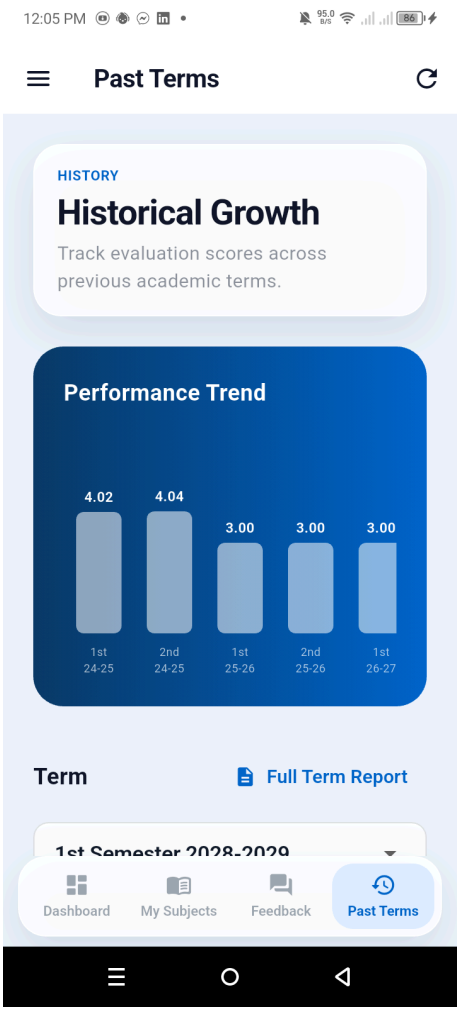
Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only. Old run (31/08/2026, older build): FAIL AT STEP 7. The rotated word "Fair grading" is clipped at the right edge of the word-cloud panel and cannot be read in full. Raised as DEF-02. PASS on steps 1, 2 and 4: observed 51% Positive, 14% Neutral, 35% Critical, summing to 100% and consistent with 25 positive of 49 comments. "What Your Students Are Saying" rendered a populated interpretation with the correct sub-label. Filters themselves rendered correctly: "All 49" / "Positive 25", with "All Subjects" and "Date (Newest)" defaults present, and the chip counts internally consistent (25 positive of 49 matches the 51% tone figure). Step 8 raised as DEF-04. Steps 3, 5, 6 and 9-11 not fully executed. DEF-02 and DEF-04 were fixed on 31/08/2026 - see the defect log. The word cloud has since been replaced by a fixed packed layout, so step 7 is re-read after two refreshes to confirm the layout does not move and no word is clipped.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC005	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**PAST TERMS, TREND CHART AND HISTORICAL TERM SELECTION** Historical scores across previous academic terms	
Revision	updated - one card per class record; terms or subjects with no answers show "—"	
Account Needed	Instructor	
Preconditions	The instructor has evaluation data in at least two previous terms.	
Test Data	View only. [overall_total_survey] joined to [academic_terms]; [instructor_subjects], [management_results], [performance_results] for the selected term. One term with no subjects (step 5).	
Steps	1. Tap the "Past Terms" tab and wait for loading to finish. ***Expected:*** Screen opens titled "Past Terms", showing "History" above "Historical Growth" and "Track evaluation scores across previous academic terms." The placeholder "Loading past terms…" is replaced by content.	
	2. Inspect the "Performance Trend" chart AND SCROLL IT SIDEWAYS TO ITS END. ***Expected:*** One bar per term with data, oldest to newest, each printing its score to two decimals over a two-line term label (a term with no stored score prints "—" with no bar). EVERY term that has data appears, INCLUDING the current active term. NOTE: the chart scrolls horizontally and the newest terms sit off-screen until scrolled. Scroll before judging.	
	3. Tap a bar in the chart, then open the term dropdown (hint "Select Term") and select a different term. ***Expected:*** A tapped bar becomes solid white to show selection and the subject list below reloads for that term. The dropdown lists terms newest first, and changes the chart highlight and the subject list together - the two never disagree about which term is selected.	
	4. For the selected term, check the "Subjects Taught" list. ***Expected:*** The counter reads "N Subjects" and matches the number of cards. Every card belongs to the SELECTED term, not the active one. Each class record is its own card: two sections of one subject code show as two cards, each with its own stored means (not merged).	
	5. Select a term with no subject records. ***Expected:*** Message reads "No subjects found for this term." and no cards from the previous term remain on screen.	
	6. Tap a subject card while a HISTORICAL term is selected. ***Expected:*** Subject Detail opens showing that historical term's figures, not the active term's.	
Expected Result	The trend chart, the dropdown and the subject list stay consistent with one another, and every historical term's data is reachable and correctly scoped.	
Actual Result (Pass/Fail)	PARTIAL – Past Terms showed Historical Growth with a Performance Trend chart and a term selector (1st Semester 2028-2029) with Full Term Report.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Term selection not exercised. Old run (31/08/2026, older build): PASS on steps 1-4 and 6. The chart holds 8 bars and scrolls to reveal all of them, ending at "2nd 27-28" at 2.99, drawn solid white as the selected term and agreeing with the dashboard. The dropdown lists all 8 terms newest first, matching the 8 bars. Selecting "1st Semester 2025-2026" reloaded the list to "4 Subjects", with "CAPSTONE 401" showing 3.03 S, Management 3.04 and Performance 3.02, correctly banded. Tapping it opened Subject Detail with that historical term's figures. Step 5 (a term with no subjects) not executed.
Tester Name / Date	
Panelist's Remarks	

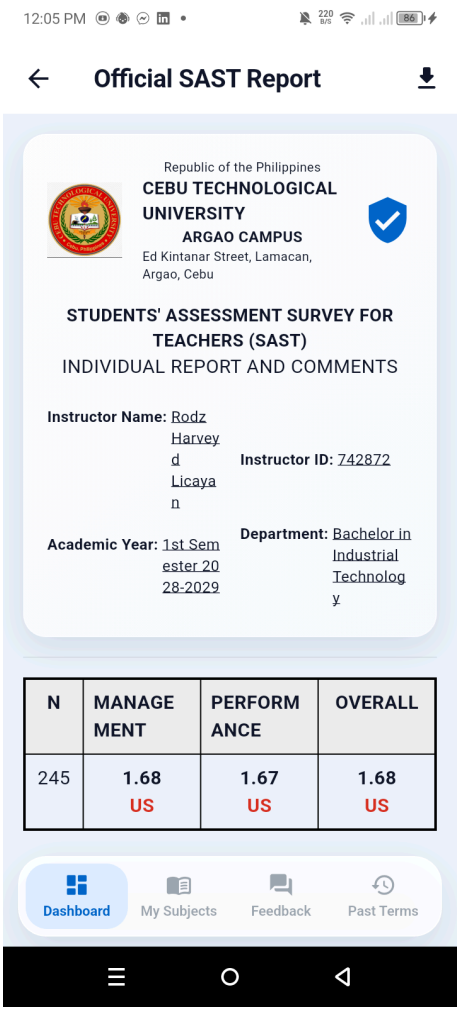
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC006	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**OFFICIAL EVALUATION REPORT AND PDF EXPORT *** FAIL - DEF-01, DEF-03 (FIXED, AWAITING RE-TEST) ***** Official SAST report on screen and as a PDF	
Revision	updated - screen title "Official SAST Report"; answered counts; PDF layout detail moved to TC011	
Account Needed	Instructor	
Preconditions	The instructor has evaluation data in the active term and in at least one past term. The device allows writing to Downloads.	
Test Data	View and export. [overall_total_survey], [overall_question_means] (mean_score, response_count), [instructor_wordcloud], [instructor_ai_suggestions]. CORRECTION TO THE PREVIOUS VERSION OF THIS DOCUMENT The download control is NOT on Past Terms. "Full Term Report" only navigates. The download icon lives in the app bar of the report screen.	

Steps	1. From the dashboard hero card, tap "View Official SAST Report". ***Expected:*** Screen opens titled "Official SAST Report", populated for the ACTIVE term. For a term with no stored result it shows only "No evaluation results yet" and "Results for this term will appear here once evaluation forms have been processed."
	2. Go back, open "Past Terms", select a past term, then tap "Full Term Report". ***Expected:*** The same report screen opens, populated for the SELECTED PAST term. The academic year in the header is that term's, not the active one's.
	3. Check the official header block. ***Expected:*** Shows the CTU logo, "Republic of the Philippines", "CEBU TECHNOLOGICAL UNIVERSITY", "ARGAO CAMPUS", "Ed Kintanar Street, Lamacan, Argao, Cebu", then "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST)" and "INDIVIDUAL REPORT AND COMMENTS", with "Instructor Name:", "Instructor ID:", "Academic Year:" and "Department:" correctly filled AND FULLY READABLE (long values wrap). "Academic Year:" reads e.g. "1st Semester 2025-2026", with "Semester" exactly once.
	4. Verify the summary table and both criterion tables. ***Expected:*** Columns "N" / "MANAGEMENT" / "PERFORMANCE" / "OVERALL", each score paired with its VD code. Sections "I. Management" and "II. Performance" each list ten criteria, each mean with "x of y answered" under it where counts exist ("—" and "-" when nobody answered), and end with "Section Mean: x.xx (Verbal)", e.g. "Section Mean: 3.04 (Satisfactory)".
	5. Check "COMMENTS & FEEDBACK SUMMARY:" and the "Top Feedback Terms" box. ***Expected:*** The paragraph equals [instructor_ai_suggestions.ai_suggestion] (or "No significant trends identified for this period." when empty), and the box lists the top five terms as "word (count)" matching [instructor_wordcloud].
	6. Check the "RANGE & Verbal Description (VD):" legend against the scores. ***Expected:*** Legend lists the five bands from "4.20 - 5.00 : Outstanding (O)" down to "1.00 - 1.79 : Unsatisfactory (US)", and every VD code printed in the tables obeys it.
	7. Tap the download icon in the app bar, then tap it again quickly. ***Expected:*** A PDF named "SAST_Report_{Instructor_Name}.pdf" (spaces become underscores) is written to the device's Downloads or Documents folder, and the system share or print sheet opens - only once, even after the second tap.
	8. Open the saved PDF and compare it with the screen, then repeat the export for a past term. ***Expected:*** Scores, criteria and comments match the on-screen report. The PDF uses the official two-format layout checked in detail in TC011; it no longer prints "INDIVIDUAL SUMMARY REPORT" or "SS Form No. 2". THE TERM READS CORRECTLY: "Term" and "Academic Year" are separate fields on the comments page and the other pages print "AY 1ST SEM 2025-2026", so "Semester" never doubles. The past-term export holds the SELECTED PAST term's figures.
Expected Result	The report renders correctly for both the active and any past term, and downloads as a PDF whose contents match the term that was selected.
Actual Result (Pass/Fail)	PARTIAL – Official SAST Report showed the instructor header, 245 respondents and Management 1.68 US, Performance 1.67 US, Overall 1.68 US.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only; PDF export not run. Old run (31/08/2026, older build): FAIL AT STEPS 3 AND 8. Steps 2, 4 and 7 PASS: opening "Full Term Report" for "1st Semester 2025-2026" produced that term's figures (N 100, Management 3.01, Performance 2.97, Overall 2.99, all banded S), the official header and criterion tables rendered, and the download wrote "SAST_Report_Rodz_Harvey_Licayan.pdf" (736 KB) whose scores match the screen exactly. STEP 3 FAILS: header fields are truncated on screen to "Rodz...", "1st Se..." and "College o..." (DEF-03). STEP 8 FAILS: the PDF reads "Academic Year: 1st Semester Semester 2025-2026", with the word Semester duplicated (DEF-01). Steps 1, 5, 6 and the past-term half of step 8 not executed. DEF-01 and DEF-03 were both fixed on 31/08/2026 - see the defect log. Re-test step 3 for the header fields, and step 8 plus TC011 for the term in the rebuilt PDF.
Tester Name / Date	
Panelist's Remarks	

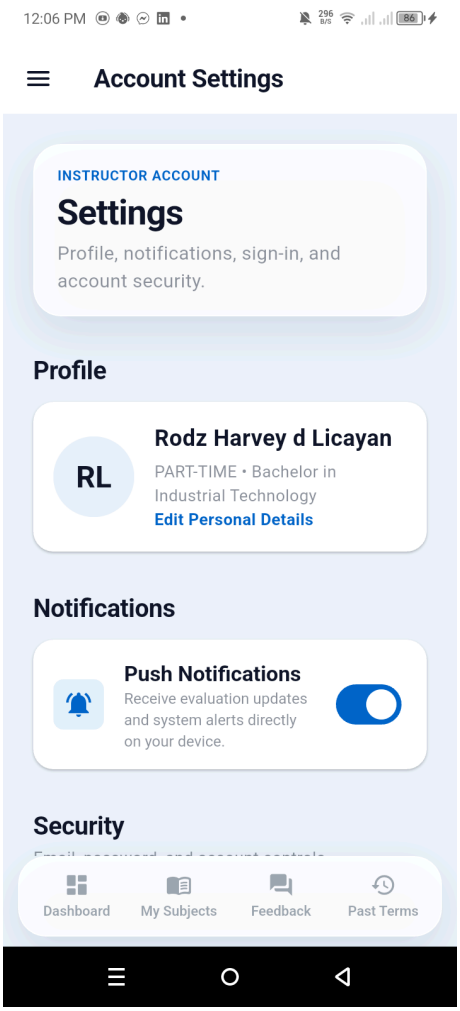
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC007	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**ACCOUNT SETTINGS: PROFILE, NOTIFICATIONS, EMAIL AND PASSWORD** Profile editing, notification preference, email confirmation flow and password rules	
Revision	updated - new name and email validation messages; password dialog titled "Change Password"	
Account Needed	Instructor; a second existing account's full name (step 6)	
Preconditions	Signed in as instructor, with access to the account's inbox for steps 8-9.	
Test Data	First and last name of the test instructor. A second existing account's full name, for step 6. An email already used by another account. A reachable new email address. A new password of at least six characters, NOT recorded here.	
Note	Steps 4-11 all write to the live account, and a successful password change signs the user out. Run the read-only steps 1-3 first.	

Steps	1. Open the hamburger menu and read the drawer. ***Expected:*** Header shows the initials avatar (first and last initial, same as Settings), full name and the role "Instructor". Items are "Account Settings" and "Log Out".
	2. Tap "Account Settings" and confirm which fields can be edited. ***Expected:*** Screen opens with app-bar title "Account Settings"; the header reads "Instructor Account" / "Settings" with the subtitle "Profile, notifications, sign-in, and account security." Name, email and password are editable; title, role and department are DISPLAY ONLY; there is no avatar upload.
	3. Scroll to the bottom of Settings. ***Expected:*** Footer reads "iEvaluate Version 1.0.0 (Prototype)".
	steps below write to the live account 4. Tap "Edit Personal Details". ***Expected:*** A sheet titled "Edit Profile" opens with "First Name" and "Last Name" fields and a warning that the name must match official school records because it is used for scanner validation.
	5. Change the name and tap "Save Changes". ***Expected:*** Snackbar reads "Profile updated successfully!" The new name appears in the drawer header and the dashboard greeting.
	6. Clear the last name and tap "Save Changes"; then try to save a full name identical to another existing account. ***Expected:*** The blank name is refused with "Please fill in both first and last name." The duplicate is refused with "Error: An account for "{First Last}" already exists. A first name or a last name may be shared, but not both. Add a middle initial or suffix to tell the two people apart." No duplicate identity is created.
	7. Toggle "Push Notifications" off, then on. ***Expected:*** Snackbars read "Push notifications disabled." then "Push notifications enabled." The setting survives closing and reopening the screen.
	8. Tap "Edit Email", then submit an address with no "@", an empty field, your current address, and an address used by another account. ***Expected:*** Dialog titled "Edit Email" reads "Enter your new email address. You will receive a confirmation link.", with a "New Email" field and "Cancel" / "Update" buttons. The first two are refused with "Please enter a valid email address.", the current one with "This is already your current email address.", the taken one with "This email address is already registered to another account." None is accepted as a change.
	9. Submit a valid new address. BEFORE clicking the emailed link, sign out and sign back in with the OLD address. Then click the link and sign in with the new address. ***Expected:*** Snackbar reads "Email updated! Check your inbox for confirmation." and the email arrives. The OLD address still works until the link is clicked. Afterwards the new address is accepted and the old one no longer authenticates.
	10. Tap "Edit Password" and submit each invalid case in turn: blank fields; a confirmation that differs; a matching password shorter than six characters; a valid password with the wrong current password. ***Expected:*** A dialog titled "Change Password" opens with "Current Password", "New Password" and "Confirm Password". Each case is refused with its own message - "Please fill in all fields.", "Passwords do not match.", "Password must be at least 6 characters.", "Current password is incorrect." - and the password is never changed.
	11. Submit a fully valid password change, then sign in with the old password and with the new one. ***Expected:*** Snackbar reads "Password updated. Please log in again." and after a short pause the app signs out to the Login screen. The old password is then rejected and the new one accepted.
Expected Result	The instructor can change their own name and notification preference, blank and duplicate names are refused, read-only fields cannot be edited, an email change is validated and takes effect only once confirmed, and every password rule has its own message.
Actual Result (Pass/Fail)	PARTIAL – Account Settings showed Profile, Notifications and Security sections.

Screenshot	
Comments / Attachments (Screenshots, Logs)	Viewed only. No edits: they change account data. Old run (31/08/2026, older build): PASS on steps 1-3. The drawer showed the initials avatar, "Rodz Harvey Licayan", role "Instructor", and both "Account Settings" and "Log Out". Settings opened with the correct heading and subtitle; Profile showed the name over "FULL-TIME - College of Technology and Engineering" with "Edit Personal Details". Title and department are display only with no avatar upload, as required. Security lists "Edit Email", "Edit Password" and "Deactivate My Account", above "Sign Out Securely" and the footer "iEvaluate Version 1.0.0 (Prototype)". Steps 4-11 DELIBERATELY NOT EXECUTED - they write to the live account. Defect found: avatar initials disagree between screens (DEF-05).
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC008	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**SIGN-OUT, SESSION TERMINATION AND SELF-DEACTIVATION [DESTRUCTIVE]** Session and cached data are cleared on sign-out, and deactivation is guarded by a 6-digit emailed code	
Revision	updated - doc fix: a deactivated login is banned, so step 11 expects the "suspended" message	
Account Needed	Instructor (disposable); a second Instructor (step 5); SAO Admin (step 11, and to restore the account afterwards - TC013 step 9)	
Preconditions	Signed in as an instructor with the dashboard already loaded once, so cached data exists. Access to the account's inbox. A second instructor account for step 5.	
Test Data	The 6-digit code emailed during the run. Edge functions [send-admin-code] and [delete-user]. WARNING: Steps 7-11 LOCK the account. Only an SAO admin can reactivate it, so use a disposable test account and arrange reactivation in advance. Run the sign-out steps 1-6 first.	

Steps	1. Open "Account Settings", tap "Sign Out Securely", then tap "Cancel". ***Expected:*** A confirmation dialog titled "Log Out" appears with "Cancel" and "Log out". Cancel closes it and the session continues.
	2. Reopen and tap "Log out". ***Expected:*** An overlay reads "Signing you out…" over "Clearing your session data.", then the Login screen appears.
	3. Press the Android back button from the Login screen. ***Expected:*** The app does not return to the dashboard. No instructor screen is reachable without signing in again.
	4. Force-close the app, reopen it, and observe the splash. ***Expected:*** The app opens on the Login screen, not a restored session. Run this only after an explicit sign-out.
	5. Sign in as a DIFFERENT instructor. ***Expected:*** The dashboard shows only the new instructor's data. No cached name, score, subject or comment from the previous account is visible at any point.
	6. Repeat the sign-out using "Log Out" from the side drawer instead of Settings. ***Expected:*** The drawer route behaves identically to the Settings route.
	steps below LOCK the account 7. Tap "Deactivate My Account", tap outside the dialog, then tap "Cancel". ***Expected:*** A dialog titled "Deactivate Account?" explains the account can only be restored by the SAO Admin, and notes a 6-digit code will be emailed. Buttons are "Cancel" and "Send Code". Tapping outside does NOT dismiss it, so deactivation cannot be triggered accidentally, and Cancel leaves the account fully active.
	8. Reopen the dialog and tap "Send Code". ***Expected:*** The dialog moves to a 6-digit numeric field hinted "000000", and a code arrives by email.
	9. Submit each invalid case: fewer than six digits; six INCORRECT digits; "Resend code" twice in quick succession; a stale code past its expiry. ***Expected:*** Refused with "Enter the 6-digit code from your email."; then the server's wrong-code message in red; then a rate-limit message naming the seconds remaining; then refused as expired with a fresh code required. The account stays active throughout.
	10. Enter the correct 6-digit code, typing the sixth digit last, and wait for the flow to finish. ***Expected:*** The dialog submits AUTOMATICALLY on the sixth digit, without a second tap, and a blocking overlay reads "Deactivating account…" over "Signing you out and locking the account." The session is then cleared and the app returns to the Login screen with no way to navigate back into the app.
	11. Try to sign in with the deactivated account, then as SAO admin confirm the instructor's evaluation records still exist. ***Expected:*** Sign-in is refused with "This account has been suspended. Please contact the SAO office." (the login is banned in Auth). This is a DEACTIVATION, not a deletion - [user_info] account_status is "disabled", scores and remarks are retained, and the account can be reactivated (TC013 step 9).
Expected Result	Signing out clears the session and cached data with no leak into the next session. Deactivation completes only after a correct emailed code, after which the account cannot sign in but its evaluation data is preserved.
Actual Result (Pass/Fail)	NOT RUN – Sign-out and self-deactivation were not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data. Old run (31/08/2026, older build): NOT EXECUTED - would lock the live account. Related observation from that run: force-closing the app and relaunching WITHOUT signing out correctly restored the session and the previously selected term. Step 4 must be run only after an explicit sign-out. The previous version expected "Your account has been deactivated by the administration." at step 11. That message only shows for an account marked disabled but not banned; [delete-user] bans the login, so the "suspended" message is what the app shows.
Tester Name / Date	

Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC009	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**FORCED PROFILE COMPLETION AFTER SIGN-IN** An instructor with a missing University ID or address must supply it before using the app, and can only leave by logging out	
Revision	new	
Account Needed	Instructor whose University ID and address are blank (e.g. the account activated in TC013)	
Preconditions	The account is approved and can sign in, and its [user_info].university_id and address are blank. For step 11 a second account missing only the address (optional).	
Test Data	A free University ID (4-30 letters, numbers or hyphens). A University ID already registered to another account. A street ("House No. / Street / Purok") and a barangay, municipality and province. Read access to [user_info] for step 9.	
Note	Steps 6-10 write the ID and address to the live account. The dialog is asked once per sign-in.	

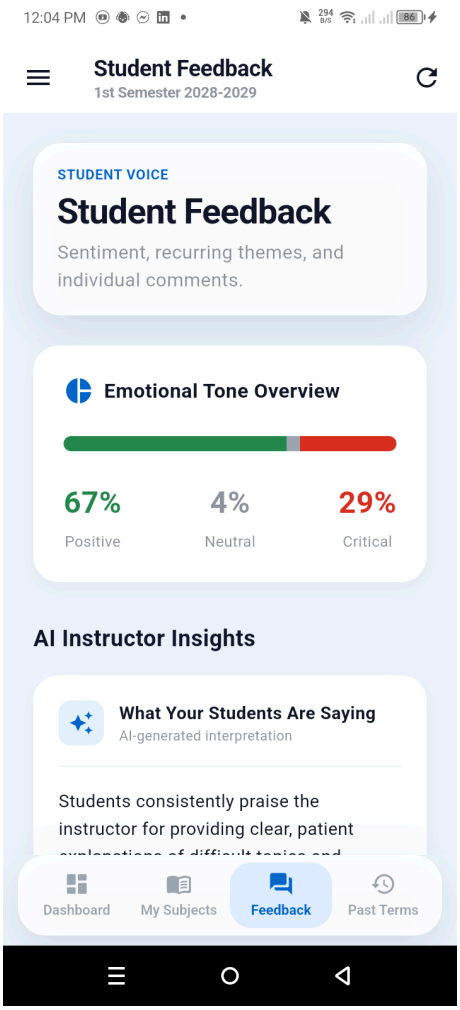
Steps	1. Sign in with the incomplete account. ***Expected:*** The dashboard appears, then a dialog titled "Complete your information" opens over it reading "Your profile is missing your University ID and your address. Please add them to continue. This information is required." Fields are "University ID", "House No. / Street / Purok" and "Barangay, Municipality, Province"; buttons are "Log out" and "Save". There is no "Later" button.
	2. Tap outside the dialog, then press the Android back button. ***Expected:*** The dialog stays open both times; the dashboard behind it cannot be used.
	3. Tap "Save" with every field empty. ***Expected:*** Nothing is saved. A red banner reads "University ID is required", and the fields show "University ID is required", "House number / street is required" and "Barangay is required".
	4. Type "AB1" as the ID, then "AB 12!". ***Expected:*** "University ID must be at least 4 characters", then "University ID must be letters, numbers, or hyphens only".
	5. Start typing in the barangay field. ***Expected:*** A suggestion list appears with the hint "Pick from the list, or type it in full if it is not there." (or "Type your barangay, municipality and province." when no list is available).
	steps below write to the live account 6. Enter an ID already registered to another account plus a valid address, and tap "Save". ***Expected:*** Refused with "This University ID is already registered to another account. Please check the number, or contact the SAO office." The dialog stays open.
	7. Tap "Log out". ***Expected:*** The session ends and the Login screen appears; the back button does not return to the dashboard.
	8. Sign in again with the same account. ***Expected:*** The "Complete your information" dialog opens again, because the profile is still incomplete.
	9. Enter a free University ID and a valid address, tap "Save", then check [user_info] for this account. ***Expected:*** The dialog closes and a snackbar reads "Your information has been saved." university_id and address now hold the values typed. If the server refuses ID changes from the app, the dialog instead reads "Your address was saved, but your University ID cannot be set from the app. Please ask the SAO office to add it for you." and asks only for the ID.
	10. Sign out and sign in again. ***Expected:*** No dialog appears; the dashboard is usable straight away.
	11. (Optional) Sign in with an account missing only its address. ***Expected:*** The dialog reads "Your profile is missing your address. Please add it to continue. This information is required." and shows only the address fields.
Expected Result	An instructor with a missing ID or address cannot use the app until both are saved, invalid and duplicate IDs are refused with their own messages, "Log out" is the only other way out, and a completed profile is never asked again.
Actual Result (Pass/Fail)	NOT RUN – Forced profile completion was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: needs an account with a blank ID or address.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC010	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**STUDENT INTERPRETATION, INSIGHT BULLETS AND BRAND WORD CLOUD** The Feedback screen shows the students' interpretation, lists themes as clean bullets and draws a fixed, brand-coloured word cloud	
Revision	new	
Account Needed	Instructor with an AI row for the active term; read access to the database for the cross-checks	
Preconditions	Signed in as instructor. [instructor_ai_suggestions] has a row for this instructor and the active term, and [instructor_wordcloud] holds words for it.	
Test Data	View only. [instructor_ai_suggestions] columns student_interpretation, ai_suggestion, positive_themes, improvement_insights. [instructor_wordcloud] word and count. If found by query: one row whose student_interpretation is empty but ai_suggestion is not (step 3), and rows whose themes are stored one-per-line, as an array literal {"a","b"}, and as one paragraph (step 4).	
Steps	1. Open the "Feedback" tab and read "What Your Students Are Saying". ***Expected:*** The paragraph is exactly student_interpretation from the most recent row for this instructor and term.	
	2. Open "Official SAST Report" for the same term and read "COMMENTS & FEEDBACK SUMMARY:". ***Expected:*** The report shows ai_suggestion. The two paragraphs may differ; this is by design (the Feedback screen speaks for the students, the report gives the recommendation).	
	3. Sign in as an instructor whose student_interpretation is empty but whose ai_suggestion is filled. If no such row exists, record N/A. ***Expected:*** "What Your Students Are Saying" shows the ai_suggestion paragraph instead. With both empty it reads "No AI interpretation available yet."	
	4. Compare "Key Positive Themes" with positive_themes for each storage shape available. ***Expected:*** Text with one point per line gives one bullet per line, with leading "-", "*", bullet or "1." markers removed and repeated lines shown once. An array literal gives one bullet per element, each starting with a capital and ending with a period. An old single paragraph shows as ONE bullet and is never cut at commas.	
	5. Repeat step 4 for "Improvement Insights" and improvement_insights. ***Expected:*** Same rules; the card is hidden when the column is empty.	
	6. Look at the "AI Word Cloud" panel. ***Expected:*** Phrases from [instructor_wordcloud] are kept whole and packed from the centre, the most frequent largest. The biggest word is white and the rest use light blue, teal, indigo and purple tints of the app's brand colours on the dark panel - not the yellow and green palette of the older build. No word overlaps another or runs past the panel edge.	
	7. Pull to refresh three times, then leave the tab and come back. ***Expected:*** The words keep exactly the same positions, sizes and colours each time. A word that does not fit is left out rather than shown clipped.	

Expected Result	The interpretation, themes and word cloud all trace back to this instructor's own stored row, themes read as clean bullets whatever their stored shape, and the word cloud is legible, brand-coloured and stable across refreshes.
Actual Result (Pass/Fail)	PARTIAL – Student Feedback showed the AI interpretation paragraph and tone percentages.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Insight bullets and word cloud not checked.
Tester Name / Date	
Panelist's Remarks	

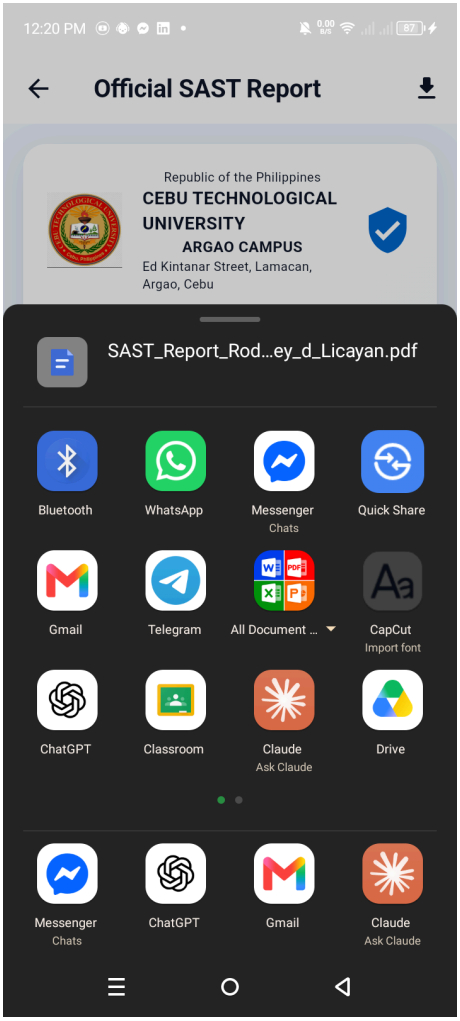
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC011	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**OFFICIAL SAST PDF: TWO FORMATS AND PER-SUBJECT PAGES** The exported report follows the official two-form layout: a comments page, then an OVERALL page and one page per subject	
Revision	new	
Account Needed	Instructor with results in two or more subjects in one term; SAO Admin (step 1, view only)	
Preconditions	The instructor has stored results for at least two subjects in the selected term, an AI row and word cloud words. The device allows writing to Downloads and has a PDF viewer.	
Test Data	View and export only. [report_signatories] row 1, [management_results] and [performance_results] per subject, [overall_total_survey], [instructor_ai_suggestions], [instructor_wordcloud]. Do NOT edit the signatories - they print on everyone's reports.	

Steps	1. As SAO Admin, open the drawer item "Report Signatories" and note the three names and titles. Do not save anything. ***Expected:*** The screen reads "Report Signatories" / "Names shown on printed reports" with "Prepared by", "Checked and Verified" and "Certified Proper and In Order", each with "Name" and "Title".
	2. As the instructor, open "Official SAST Report" for the term and tap the download icon. ***Expected:*** "SAST_Report_{Instructor_Name}.pdf" is saved and the share or print sheet opens.
	3. Open the PDF and read the first page (comments format). ***Expected:*** The letterhead shows "Republic of the Philippines", "CEBU TECHNOLOGICAL UNIVERSITY", "ARGAO CAMPUS", the campus address, website, email and phone. Below it: "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST)" and "INDIVIDUAL REPORT AND COMMENTS", then "Term", "Academic Year", "College" (when known), "Department" and "Name of Faculty" in capitals, and a table "N" / "MANAGEMENT" / "PERFORMANCE" / "OVERALL" matching the screen.
	4. Read the "COMMENTS:" paragraph. ***Expected:*** One flowing paragraph starting "Integrated with the quantitative ratings (Management = x.xx ..." with the screen's figures and their verbal descriptions, then the top word-cloud terms, the students' interpretation, "Students particularly appreciated ...", "Areas identified for improvement include ..." and the recommendation, taken from this instructor's row.
	5. Check the word cloud and the signature block on the comments page. ***Expected:*** "Students' Feedback on {Name}'s Performance" heads a packed word cloud of this instructor's terms, none clipped or overlapping ("No feedback terms yet." when empty). The signature block prints "Prepared by:", "Checked and Verified:" and "Certified Proper and In Order:" with the names (in capitals) and titles noted in step 1.
	6. Go to the next page (OVERALL format). ***Expected:*** Title reads "STUDENTS' ASSESSMENT SURVEY FOR TEACHERS (SAST) INDIVIDUAL REPORT — OVERALL" with "AY 1ST SEM 2025-2026" style term line ("Semester" shortened, never doubled). Rows "Name of Instructor/Professor", "Course Taught" ("All subjects (N):" followed by the codes), "No. of Student-evaluators" and "Campus: ARGAO"; the "RANGE & Verbal Description (VD)" legend; the "I. Management" and "II. Performance" tables with "Mean" and "VD"; "*Comments made by the students are herewith attached."; "Summary Statistics" with "Management Mean (MM)" and "Performance Mean (PM)"; and "You are a/an" over the verbal description in capitals and "General Average x.xx". Figures equal the dashboard's for that term.
	7. Go through the remaining pages. ***Expected:*** One page per subject in the same format, without the "OVERALL" suffix, sorted by course. Each shows "Course Taught" as "CODE - Subject Name" and that subject's own N, criterion means and general average, matching its Subject Detail screen.
	8. Export for an instructor with results in only one subject that term. ***Expected:*** The PDF holds the comments page, the OVERALL page and one subject page, with matching figures and no empty pages.
Expected Result	The PDF holds a comments page, an OVERALL page and one page per subject in the official layout, every figure matches the app, the term is printed correctly, and the signatories are the ones set by the SAO Admin.
Actual Result (Pass/Fail)	PARTIAL – The download icon produced SAST_Report_Rodz_Harvey_d_Licayan.pdf (2 pages) in the share sheet.

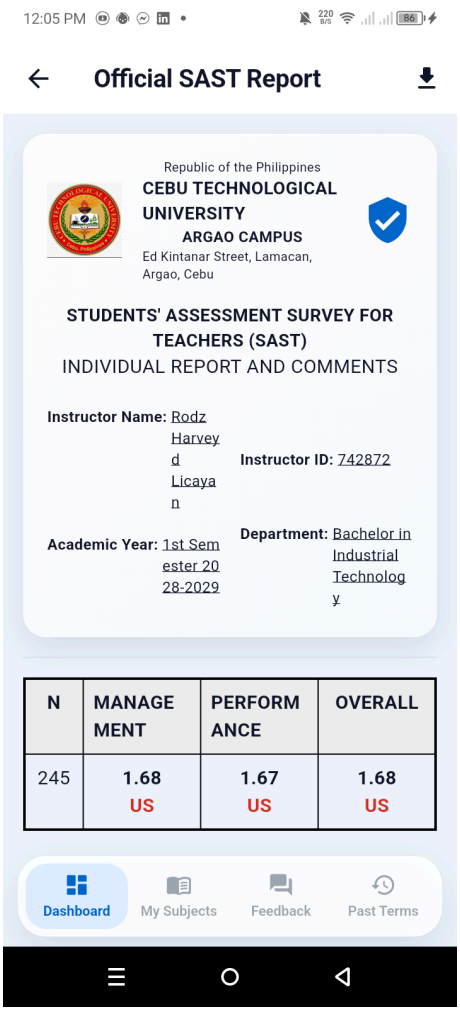
Screenshot	
Comments / Attachments (Screenshots, Logs)	PDF generated but not opened; layout, pages per subject and signatories not checked.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC012	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**DESCRIPTIVE RATING EQUIVALENTS AND MISSING SCORES ACROSS SCREENS** Every screen and the PDF give the same verbal description for the same stored mean, and a missing mean is never shown as zero	
Revision	new	
Account Needed	Instructor with results; a second Instructor with no stored result for the active term; read access to the database	
Preconditions	Signed in as instructor with stored results in the active term.	
Test Data	View only. [overall_total_survey], [management_results], [performance_results], [overall_question_means]. By query: a stored mean exactly on a band edge (4.20, 3.40, 2.60 or 1.80) or the closest available, and a criterion with no answers (null mean).	
Steps	1. Note combined_score_mean for this instructor and term, then read the dashboard, My Subjects header, report summary and PDF "General Average". ***Expected:*** All show the same value to two decimals.	
	2. Compare the verbal description on the dashboard badge, the My Subjects pill, the report's VD code and the PDF's "You are a/an". ***Expected:*** All agree with the table 4.20-5.00 Outstanding (O), 3.40-4.19 Very Satisfactory (VS), 2.60-3.39 Satisfactory (S), 1.80-2.59 Fair (F), 1.00-1.79 Unsatisfactory (US).	
	3. Open the subject or criterion whose mean sits on a band edge. ***Expected:*** The edge value takes the HIGHER band (e.g. 3.40 is Very Satisfactory / VS, 3.39 is Satisfactory / S) on every screen and in the PDF.	
	4. Open the criterion with no answers in Subject Detail, the report and the PDF. ***Expected:*** The mean shows "—" and the VD "-", never "0.00" or "US".	
	5. Sign in as the instructor with no stored result for the active term and visit the dashboard, My Subjects, Official SAST Report, then export the PDF. ***Expected:*** Dashboard "—" with "No evaluation results yet"; My Subjects header "N/A" with the pill "No data"; the report shows "No evaluation results yet". The PDF prints "—" for every mean, "NO DATA" under "You are a/an", and the COMMENTS paragraph reads "No evaluation results yet."	
Expected Result	One rating rule is applied everywhere, band edges round up to the higher band, and missing scores read as "—", "N/A" or "No data", never as 0.00.	
Actual Result (Pass/Fail)	PARTIAL – The report and dashboard showed descriptive equivalents (Unsatisfactory, US) next to 2-decimal scores.	

Screenshot	
Comments / Attachments (Screenshots, Logs)	Missing-score handling not checked.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC013	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**ACTIVATION OF A PLACEHOLDER INSTRUCTOR ACCOUNT [DESTRUCTIVE]** An instructor first added during batch scanning gets a real login from the SAO Admin, sets a password and signs in with their results intact; a deactivated instructor is approved again	
Revision	new	
Account Needed	SAO Admin; a placeholder Instructor account (login placeholder-...@ievaluate.internal); the deactivated Instructor left by TC008 (step 9)	
Preconditions	A placeholder instructor exists with evaluation results attached. The person's real email inbox is reachable. The account from TC008 is disabled.	
Test Data	The instructor's real email (not yet used by any account). An email already used by another account. The password-reset code emailed in step 6. A new password meeting the reset rules, NOT recorded here. WARNING : Steps 5-9 approve accounts on the shared database and cannot be undone by the tester. Use a disposable placeholder record.	

Steps	1. As SAO Admin open the "Users" tab, find the placeholder instructor and open its menu. ***Expected:*** The menu item reads "Activate & Approve", not "Approve".
	2. Tap "Activate & Approve". ***Expected:*** A dialog titled "Activate account" shows the person's name and role / department, explains "This account was added without a real login, so it cannot be approved as is. ...", offers a field hinted "Person's real email", and buttons "Cancel" and "Activate & Approve".
	3. Submit a placeholder address, then an address used by another account. ***Expected:*** "Enter the person's real email address, not the placeholder"; then "This email address already belongs to another account. Use a different address." Nothing is changed.
	4. Tap "Cancel". ***Expected:*** The dialog closes and the account is still a placeholder.
	steps below change the shared database 5. Reopen the dialog, enter the real email and tap "Activate & Approve". ***Expected:*** The title changes to "Account activated" with "{Name} is approved and their login email is {email}." and "An email saying the SAO admin activated their account was sent to {email}. To set a password they open iEvaluate, tap "Forgot Password?", enter {email} and type the code that is emailed to them." (or a warning "The email to {email} could not be sent. Please give them the steps above in person."). "Done" closes it.
	6. As the instructor, on Login tap "Forgot Password?", enter the email, "Send Code", type the emailed code, "Verify Code", set a new password and tap "Update Password". ***Expected:*** The dialog passes "Reset Password", "Enter Code" and "Set New Password"; the Login screen then shows "Password updated successfully! Please log in with your new password."
	7. Sign in with the new password. ***Expected:*** The dashboard opens with the results that were attached to the placeholder, followed by the "Complete your information" dialog (continue with TC009).
	8. From a second SAO Admin screen that was open before step 5, try to activate the same account again. ***Expected:*** A warning beginning "Already activated" appears and only "Close" is offered; nothing is changed.
	9. As SAO Admin find the instructor deactivated in TC008, open its menu and tap "Approve", then sign in as that instructor. ***Expected:*** No activation dialog (the login is a real email). Snackbar reads "Account approved successfully". The instructor signs in with their existing password and their old scores are intact.
Expected Result	A placeholder instructor can only be approved together with a real, unused email; the person then sets a password and signs in with their results intact, and a deactivated instructor regains access once approved.
Actual Result (Pass/Fail)	NOT RUN – Placeholder activation was not run.
Screenshot	
Comments / Attachments (Screenshots, Logs)	Not run: changes shared data.
Tester Name / Date	
Panelist's Remarks	

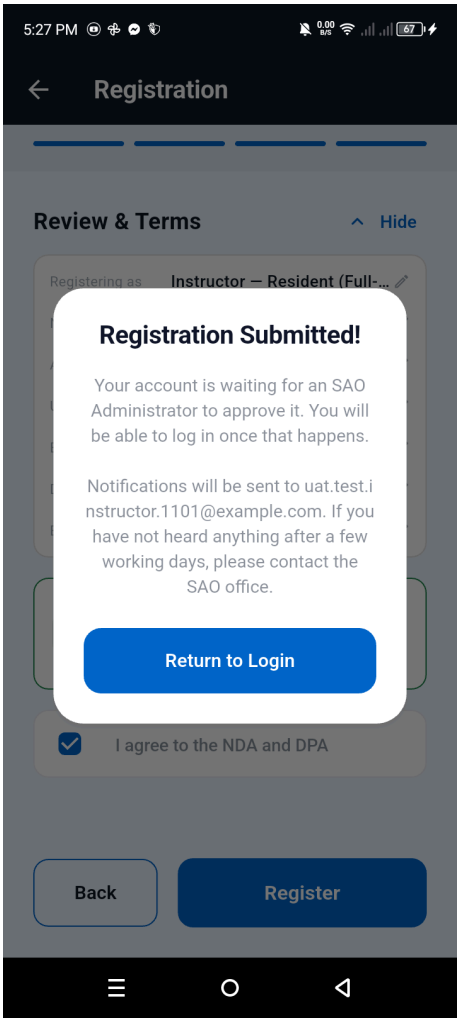
Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

Test Case ID	TC014	
Capstone Project Title:	iEvaluate: An AI-Driven Mobile Instructor Evaluation and Performance Analysis System Using N8n Workflow Automation	
Team	ERMM	
	Project Leader:	Rodz Harvey Licayan
	Front-End Programmer:	Michael Thomas Gonzaga
	QA Engineer:	Mark Lawrence Medillo
	Technical Writer:	Evangeline Caruana
Title / Business Scenario	**REGISTRATION AS AN INSTRUCTOR WITH THE COLLEGE PICKER** A new instructor registers through the four-step form, picking a college before a department, and waits for SAO approval	
Revision	new	
Account Needed	None to register (new applicant); SAO Admin to reject the test registration afterwards	
Preconditions	App on the Login screen. The [colleges] table is populated and departments carry a college_id; if not, the College field is absent and steps 3-5 are recorded as N/A.	
Test Data	A new name, address, University ID and institutional email not used by any account. One University ID and one email already registered. A password meeting the rules, NOT recorded here.	
Note	Step 9 creates a pending account. Ask the SAO Admin to reject it after the test.	

Steps	1. On Login tap "Register". ***Expected:*** The "Registration" screen opens on "Personal Information" with "I am registering as", "First Name", "Last Name", "House No. / Street / Purok" and "Barangay, Municipality, Province", and a "Continue" button. The role list includes "Instructor — Resident (Full-Time)" and "Instructor — Non-Resident (Part-Time)".
	2. Tap "Continue" with no role chosen. ***Expected:*** Refused with "Please choose what you are registering as".
	3. Choose "Instructor — Resident (Full-Time)", fill the names and address, and tap "Continue". ***Expected:*** "Academic Information" opens with "Registering as Instructor — Resident (Full-Time).", then "University ID", "Institutional Email", "Select College" and "Select Department". The department picker cannot be opened until a college is chosen.
	4. Fill the ID and email, leave the college empty, tap "Continue". ***Expected:*** Refused with "Please select a college".
	5. Pick a college and open the department list; then pick a different college. ***Expected:*** Only that college's departments are listed, with no college names among them. Changing the college clears the department.
	6. Type the already-registered ID and email, then the new ones. ***Expected:*** "This University ID is already registered" and "This email is already registered"; then "This University ID is available" and "This email is available".
	7. Choose a department, tap "Continue", and type a weak password, then a mismatched confirmation. ***Expected:*** "Create Password" lists "At least 8 characters", "One uppercase letter", "One number" and "One special character (! @ # - _ …)", ticking as each is met; a mismatch shows "Passwords do not match".
	8. Enter a valid password, tap "Continue", and try to tick the agreement before opening it. ***Expected:*** "Review & Terms" shows "Registering as", "Name", "Address", "Email", "Department" and "Employment" ("Resident (Full-Time)"). "I agree to the NDA and DPA" stays disabled with "Read the agreement above first" until "NDA and Data Privacy Agreement" is opened and read.
	9. Read the agreement, tick the box and tap "Register"; then try to sign in. ***Expected:*** "Registration Submitted!" reads "Your account is waiting for an SAO Administrator to approve it. ..." with "Return to Login". Signing in is refused with "Account pending admin approval."
Expected Result	A new instructor can register only with a college, a department of that college, a unique ID and email and a strong password, and the account waits for SAO approval.
Actual Result (Pass/Fail)	PARTIAL – Register > Instructor > Academic Information showed Select College above Select Department, Select Department disabled until a college was picked, and College of Technology and Engineering listed 3 departments.

Screenshot	
Comments / Attachments (Screenshots, Logs)	No registration submitted; screenshot shared with TC-A13.
Tester Name / Date	
Panelist's Remarks	

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

DEFECT LOG - 31 AUGUST 2026

```
Ordered most severe first. Statuses are as of the 31 August 2026 run; notes
dated 2026-11-01 say where the 2026-10-28 build changed the affected code.

--------------------------------------------------------------------------------
DEF-01  The word "Semester" is printed twice on the official report
        SEVERITY: HIGH        STATUS: FIXED 31/08/2026, PENDING RE-TEST
--------------------------------------------------------------------------------
  The exported PDF read "Academic Year: 1st Semester Semester 2025-2026". The
  report screen had the same fault, hidden only because the field is truncated
  there (DEF-03).

  ROOT CAUSE, CONFIRMED IN CODE
  The codebase documents its own contract in
  lib/core/services/system_settings_service.dart lines 11-12: "semester" is a
  label that ALREADY includes the word, e.g. "1st Semester", and
  "academicYear" is just "2025-2026". Two things broke that contract:

    1. Both places that compose the field inserted the word a second time:
         lib/instructor/detailed_report_screen.dart:358
         lib/core/services/pdf/pdf_service.dart:288
       Each read '$term Semester $academicYear'.
    2. lib/instructor/past_semesters_screen.dart:421-422 split the combined
       label "1st Semester 2025-2026" on the FIRST space, producing
       term="1st" and academicYear="Semester 2025-2026".

  All three entry points into the report were affected, because the dashboard
  passes term="2nd Semester" and the department-head page does the same.

  FIX APPLIED
    - Both composition sites now read '$term $academicYear', since the term
      already carries the word.
    - Past Terms now splits on the LAST token via two new helpers,
      _semesterOf() and _academicYearOf(), giving term="1st Semester" and
      academicYear="2025-2026" as the contract requires.
    - "flutter analyze" reports no issues on all three files.

  NOTE 2026-11-01: the PDF was rebuilt (commit e2d7ee3) in the official
  two-format layout. It prints "Term" and "Academic Year" as separate fields
  and "AY 1ST SEM 2025-2026" on the other pages, so the PDF no longer
  composes the two at all.

  STILL TO DO: re-run TC006 step 3 (screen) and TC006 step 8 with TC011
  steps 3 and 6 (PDF) on the 2026-10-28 build.

--------------------------------------------------------------------------------
DEF-02  Word cloud clips words at the panel edge
        SEVERITY: MEDIUM      STATUS: FIXED 31/08/2026, PENDING RE-TEST
--------------------------------------------------------------------------------
  In "AI Word Cloud" the rotated term "Fair grading" ran past the right edge of
  the dark panel and was cut off mid-word, so it could not be read.

  Because the cloud reshuffles on every load, WHICH word was clipped changed
  between refreshes, making this intermittent rather than tied to one term.

  ROOT CAUSE, CONFIRMED IN CODE
  Nothing bounded a word to the panel. The words sit in a Wrap inside a
  fixed-padding Container, and each word was a bare Text with no width
```

constraint, so a word wider than the panel simply overflowed it. Rotated words are the ones most at risk: RotatedBox swaps the constraints it passes down, so a rotated word's own text width becomes its vertical extent, and neither extent was capped.

FIX APPLIED
- The word area is now wrapped in a LayoutBuilder, so the panel's real inner width is known at layout time.
- Every word is bounded by ConstrainedBox(maxWidth: that width) and drawn through FittedBox(fit: BoxFit.scaleDown), so a word too wide to fit is rendered slightly smaller instead of running off the edge. scaleDown only ever reduces, so no word grows beyond the size its count earned it.
- The same bound sits inside RotatedBox, where the swapped constraints make it cap the rotated word's height. Both extents are now bounded, so clipping is impossible by construction rather than by luck of the shuffle.
- "flutter analyze" reports no issues on the file.

NOTE 2026-11-01: the Wrap-based cloud above was later replaced by a packed, deterministic word cloud shared with the PDF (lib/core/widgets/packed_word_cloud.dart, brand colours since commit 2b8c355). Each word sits in its own box and is scaled down to fit; a word that cannot be placed is left out. The cloud no longer reshuffles.

STILL TO DO: re-run TC004 step 7 and TC010 steps 6-7 on the 2026-10-28 build.
File: lib/instructor/student_feedback_screen.dart

DEF-03 Report header fields are truncated on screen
SEVERITY: MEDIUM STATUS: FIXED 31/08/2026, PENDING RE-TEST

On "Official Evaluation Report" (now titled "Official SAST Report") the identity fields were cut off:
- "Instructor Name: Rodz..."
- "Academic Year: 1st Se..."
- "Department: College o..."

The instructor could not confirm from the screen that the report was about them or which term it covered.

The exported PDF was NOT affected: it renders "Rodz Harvey Licayan" and "College of Technology and Engineering" in full. So this was a layout constraint in the on-screen header, not bad data.

ROOT CAUSE, CONFIRMED IN CODE
_headerField rendered the value with overflow: TextOverflow.ellipsis on a single line, and the header places TWO of these side by side in one Row - so each field had only half the screen width to work with. On a phone that is not enough for a full name plus its label, so every long value was cut.

FIX APPLIED
- The value now wraps (softWrap: true, no ellipsis) instead of being cut, and the Row is top-aligned so a wrapped value sits correctly beside its label.
- The field grows downward by a line or two on a narrow screen. That is the right trade: this block exists so the instructor can confirm the report is theirs, so being complete matters more than being one line tall.
- "flutter analyze" reports no issues on the file.

STILL TO DO: rebuild the app and re-run TC006 step 3, confirming all four fields read in full.
File: lib/instructor/detailed_report_screen.dart

DEF-04 Direct Quotes counter sits flush against the screen edge
SEVERITY: LOW STATUS: FIXED 31/08/2026, PENDING RE-TEST

The "N Comments" counter beside the "Direct Quotes" heading reached the right edge of the display with no padding. At the tested count it stayed readable, but a wider value or a larger system font size would have clipped it.

ROOT CAUSE, CONFIRMED IN CODE
The heading and the counter sat in a spaceBetween Row as two unconstrained

Text widgets. Neither could yield, so once the pair exceeded the row width the counter was pushed off the end rather than the heading giving way.

FIX APPLIED
- Both sides are now Flexible with a 12px gap between them, and the counter is end-aligned, so the heading yields first and the number is never cut.
- "flutter analyze" reports no issues on the file.

STILL TO DO: re-run TC004 step 8, ideally once at the largest system font size the device offers.
File: lib/instructor/student_feedback_screen.dart

DEF-05 Avatar initials differ between the drawer and Settings
SEVERITY: LOW STATUS: FIXED 31/08/2026, PENDING RE-TEST

The same signed-in instructor was shown as "RH" in the side drawer but "RL" on the Settings profile card, so the account appeared to belong to two different people depending on the screen.

ROOT CAUSE, CONFIRMED IN CODE
The two screens composed the initials from different things. The drawer took the first TWO WORDS of the full display name, so "Rodz Harvey Licayan" gave "RH" - the middle name. Settings used first_name + last_name and gave "RL".

FIX APPLIED
- The drawer now uses a new _initialsOf() helper that takes the FIRST and LAST word of the name, skipping any middle name, so it produces "RL" and agrees with Settings. A single-word name yields one letter, and an empty name still yields "?".
- Settings was already correct and is unchanged.
- "flutter analyze" reports no issues on the file.

STILL TO DO: re-run TC007 step 1 and confirm the drawer and the Settings profile card show the same two letters.
File: lib/core/navigation/main_scaffold.dart

DEF-06 Older PDF exports carry malformed filenames
SEVERITY: LOW STATUS: NEEDS CONFIRMATION

The device's Downloads folder holds earlier exports named:
SAST_Report_....pdf (truncated name leaked into filename)
SAST_Report_Instructor.pdf (fell back to the literal word)
SAST_Report_Rodz_Harvey__Licayan.pdf (doubled underscore)

NOT REPRODUCED ON THIS BUILD. The 31 August export was named correctly, so this may already be fixed, or may depend on how quickly the export is triggered after the profile loads. Export twice more, once immediately after opening the report, before closing this off.

Affects TC006 step 7 and TC011 step 2.

DEF-07 Unreachable screen in the instructor module
SEVERITY: LOW (code hygiene) STATUS: OPEN

---

lib/instructor/term_subjects_screen.dart is never instantiated anywhere in the codebase. Past Terms renders its own subject list inline instead. It is dead code, so no acceptance test can cover it. Either wire up an entry point or remove the file. Still true on the 2026-10-28 build.

ONE SUSPECTED DEFECT WAS INVESTIGATED AND WITHDRAWN

The Performance Trend chart first appeared to be missing the active term, because its newest VISIBLE bar was "1st 26-27" while the dropdown read "2nd Semester 2027-2028". Scrolling the chart to its right end showed the term is present and correctly selected, so the chart works as intended.

Recorded here because the same misreading is easy to repeat: THE CHART
SCROLLS HORIZONTALLY, AND THE NEWEST TERMS SIT OFF-SCREEN UNTIL SCROLLED.

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

WHAT CHANGED FROM THE PREVIOUS VERSIONS OF THIS DOCUMENT

AGAINST THE 4-CASE VERSION OF 26 AUGUST 2026

1. EXPECTED RESULTS WERE WRONG ON THREE OF FOUR CASES. The old TC001-TC003 all ended with "The account is created successfully and the user is redirected to the login page" - a registration outcome carried into three view-only screens. Each case now states the outcome its own steps produce.

2. A LIVE PASSWORD WAS PRINTED IN THE TEST DATA. The old TC004 listed a working credential in a document circulated to panelists. Credentials are now referred to but never written down.

3. THE DOWNLOAD STEP POINTED AT THE WRONG SCREEN. The old TC002 step 4 checked for a download control on Past Terms, where none exists. It now runs in TC006 against the report screen's app bar.

4. EVERY STEP CARRIES ITS OWN EXPECTED RESULT, so a failure identifies the step rather than giving one verdict for the whole scenario.

5. FAILURE PATHS ARE TESTED, NOT JUST HAPPY PATHS - rate limiting, deactivated-account sign-in, password rules, and wrong or expired codes. The old version recorded Pass on every case with no negative testing.

6. RESULTS ARE NO LONGER PRE-FILLED. Only cases actually executed carry a verdict; the rest say NOT EXECUTED and why.

AGAINST THE 14-CASE VERSION OF 31 AUGUST 2026

7. THE SAME COVERAGE IS NOW EIGHT CASES INSTEAD OF FOURTEEN.
   Nothing was dropped. Cases that tested one screen from two angles, or the read and write halves of one screen, were folded together, so the document reads as one case per screen or flow. Where a merged case mixes a passing read path with an unexecuted write path, the split is stated in the Actual Result and marked in the steps.

OLD CASE	NOW
TC001 valid sign-in	TC001 steps 1-4
TC002 sign-in failure paths	TC001 steps 5-9
TC003 dashboard overview	TC002 steps 1-5
TC004 dashboard sync / notices / term	TC002 steps 6-9
TC005 my subjects	TC003 steps 1-4
TC006 subject detail	TC003 steps 5-10
TC007 feedback tone and AI insights	TC004 steps 1-6
TC008 word cloud and quote filters	TC004 steps 7-11
TC009 past terms	TC005
TC010 official report and PDF	TC006
TC011 settings profile / notification	TC007 steps 1-7
TC012 email and password	TC007 steps 8-11
TC013 self-deactivation	TC008 steps 7-11
TC014 sign out	TC008 steps 1-6

   Defect cross-references were renumbered with the cases. Every DEF- number is unchanged, so anything already citing a defect still matches.

8. SIGN-OUT IS NOW TESTED BEFORE DEACTIVATION.
   They share a case, and deactivation locks the account. Running sign-out first means the destructive step is genuinely last.

AGAINST THE 8-CASE VERSION OF 31 AUGUST 2026 (REVISED 1 NOVEMBER 2026)

9. THE DOCUMENT NOW FOLLOWS THE BUILD OF 2026-10-28 (COMMIT 926b836).
   TC001-TC008 keep their IDs and order but were all updated: renamed screens
   ("Official SAST Report", "Student Feedback" header), "—" instead of 0.00
   for missing means, "x of y answered" counts, student interpretation and
   bullet theme cards, the fixed packed word cloud, the new PDF layout, new
   validation messages, and the profile dialog after sign-in. The 31/08 run
   results moved to each case's Comments; Actual Result is blank again.

10. SIX NEW CASES: TC009 forced profile completion, TC010 student
    interpretation / insight bullets / brand word cloud, TC011 two-format
    official PDF, TC012 rating equivalents and missing scores, TC013
    placeholder-account activation and re-approval, TC014 registration with
    the college picker.

11. EVERY CASE NAMES ITS ACCOUNTS ("Account Needed"), and the cases that
    change the shared database for good are marked [DESTRUCTIVE]: TC008 and
    TC013.

12. TWO EXPECTATIONS WERE CORRECTED FOR BEHAVIOUR THAT DID NOT CHANGE: a
    deactivated login is banned in Auth, so TC001 step 8 and TC008 step 11
    now expect "This account has been suspended. Please contact the SAO
    office."; and the SAST Guidelines screen was confirmed to be reachable
    only by SAO Admin and SAO Staff, so it has no instructor case.

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SUMMARY

```
  THIS REVISION (1 NOVEMBER 2026, BUILD OF 2026-10-28, COMMIT 926b836)
  Total cases                : 14
    Unchanged                : 0
    Updated                  : 8   (TC001-TC008)
    Removed                  : 0
    New                      : 6   (TC009-TC014)
  Marked [DESTRUCTIVE]       : 2   (TC008, TC013)
  Executed on this build     : 0   - the new run is PENDING

  PREVIOUS RUN (31 AUGUST 2026, OLDER BUILD, 8 CASES) - now in Comments
  Passed                     : 2   (TC003, TC005)
  Failed                     : 2   (TC004, TC006)
  Partly executed            : 3   (TC001, TC002, TC007)
  Not executed               : 1   (TC008)

  Defects raised             : 7
    Fixed, pending re-test   : 5   (DEF-01, DEF-02, DEF-03, DEF-04, DEF-05)
    Open                     : 1   (DEF-07, dead code, no test can cover it)
    Needs confirmation       : 1   (DEF-06, not reproduced on that build)
  Suspected defects withdrawn: 1   (Performance Trend chart)

  Every screen an instructor can reach has a case. The 31 August verdicts are
  history, not results for this build: a fix in code is not a passed test,
  and TC004 and TC006 turn green only once the tester re-runs them on the
  2026-10-28 build and signs for it.


--------------------------------------------------------------------------------
RE-TEST CHECKLIST - WHAT TURNS THE TWO FAILURES GREEN
--------------------------------------------------------------------------------
  Use the build of 2026-10-28 (commit 926b836). The fixes are NOT in the build
  that was tested on 31 August.

  TC004 step 7  AI Word Cloud - every word fully readable, and the layout
                stays the same after two pull-to-refreshes.        [DEF-02]
  TC010 st 6-7  Same cloud: brand colours, no clipping, no movement. [DEF-02]
  TC004 step 8  "N Comments" counter fully on screen, not against the
                edge. Worth one pass at the largest system font size.  [DEF-04]
  TC006 step 3  Report header - "Instructor Name:", "Instructor ID:",
                "Academic Year:" and "Department:" all read in full.   [DEF-03]
  TC006 step 8  Exported PDF prints the term correctly, "Semester" never
  TC011 st 3,6  doubled ("Term" / "Academic Year"; "AY 1ST SEM ..."). [DEF-01]
  TC007 step 1  Drawer initials match the Settings profile card.       [DEF-05]

  If each behaves as written, update that case's Actual Result and verdict, and
  move the defect from PENDING RE-TEST to CLOSED with the re-test date.
```

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

SIGN-OFF

Tester : Rodz Harvey D. Licayan _____ Date: _____

QA Engineer : Mark Lawrence Medillo _____ Date: _____

Project Leader : Rodz Harvey Licayan _____ Date: _____

PANELIST'S REMARKS

_____

_____

_____

_____

Republic of the Philippines
CEBU TECHNOLOGICAL UNIVERSITY
ARGAO CAMPUS
Ed Kintanar Street, Lamacan, Argao, Cebu
Website: http://www.argao.ctu.edu.ph E-mail: cdargao@ctu.edu.ph
Phone No.: (032) 401-0737 local 1700

COLLEGE OF TECHNOLOGY AND ENGINEERING
Information Technology Department

USER ACCEPTANCE TESTING

iEvaluate - Instructor Module UAT - Team ERMM Cebu Technological University, Argao Campus